

A

CAUTION

- Inspect the wire insulation for any cuts, abrasions, or exposed copper that may have resulted during shipping. If there is a defect in the wire, do not attempt installation.
- Before starting installation of this fixture or removal of a previous fixture, disconnect the power by turning off the circuit breaker or by removing the fuse at the fuse box.

TOOLS REQUIRED

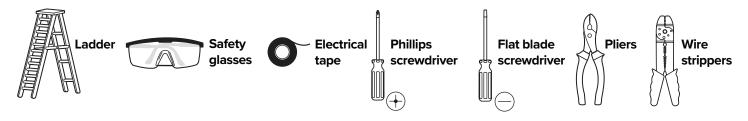


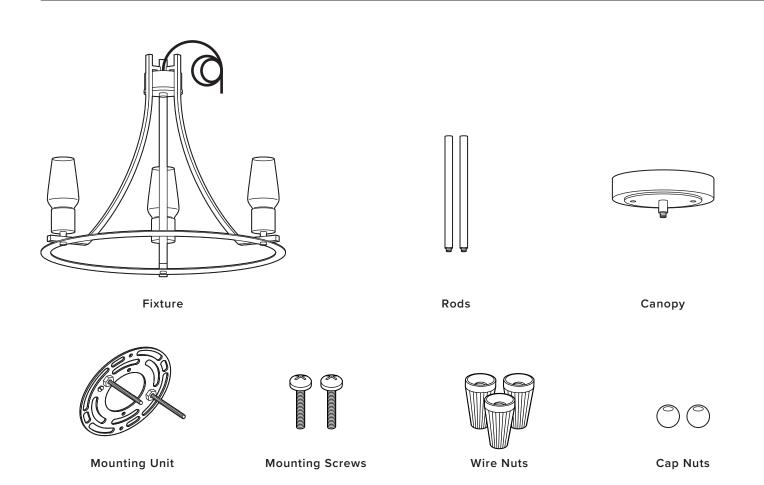

*PARTS SHOWN MAY DIFFER SLIGHTLY PER LIGHT FIXTURE


STEP 1

Screw the **rods** to the **fixture**. Make sure to feed the branchwires of the **fixture** through the **rods** during assembly. Remove or add **rods** to adjust the height.

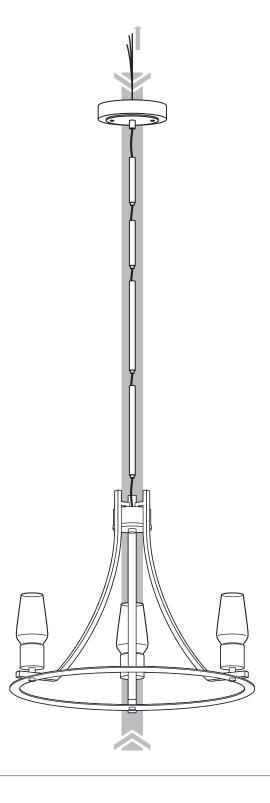

STEP 2

Use the $\mbox{\bf mounting screws}$ to attach the $\mbox{\bf mounting unit}$ to the junction box

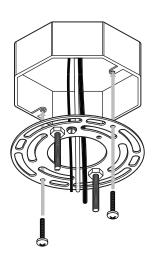

STEP 3


Make the electrical connection from the junction box to the **fixture**. Connect the ground wire to the **mounting unit** using the preinstalled green ground screw. Then, connect the positive, negative and ground wires with the supplied **wire nuts**. Secure with electrical tape


Connect Clear, Brown, Gold or Black Parallel Wire without tracer (round & smooth) or Black Fixture Wire to:

Black or Red Supply Wire or Insulated Wire (other than green) with copper conductor.

Connect Clear, Brown, Gold or Black *Parallel Wire with tracer (square & ridged) or White Fixture Wire to:


White Supply Wire or Insulated Wire (other than green) with silver conductor



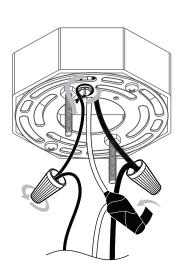

STEP 4

Place the **canopy** over the **mounting unit** and secure the **fixture** with the **cap nuts**.

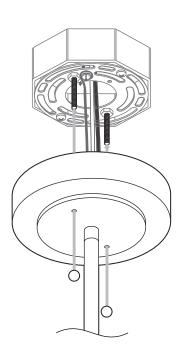

STEP 5

Install bulbs (not included)

