



COOL WHITE  
**2700K**  
KELVIN

CRI  
**90+**  
TRUECOLOR

**LED**  
LENS

**DAMP**  
RATED

**IC**  
RATED

**110°**  
BEAM  
ANGLE



**1100**  
LUMENS

**15W**  
=100W POWER

**120 VOLT**

**DIMMABLE**  
100-10%

**DIE-CAST**  
ALUMINUM

**INDOOR &  
OUTDOOR**

CERTIFICATIONS



## SPECIFICATIONS

### 5/6 INCH LED | 27K

#### THIN DISK LIGHT | WHITE ROUND | RETROFIT OR SURFACE MOUNT

NW-R-DSK-6-15W-27K

The NUWATT thin led disk can be directly wired to a 4"/6" junction box which means they do not need a can. Directly install to the ceiling for instant bright light in your laundry room, kitchen, bedrooms, bathrooms, offices and more!

#### TECHNICAL SPECS


VOLTAGE	AC 120V
WATTAGE	15W
POWER FACTOR	>0.9
LUMENS	1100
CRI	90
EQUIVALENCY	75/100W
DIMMABLE	TRIAC DIMMING
BEAM ANGLE	110°
EFFICACY (LM/W)	67
COLOR TEMPERATURE	2700K (-4°F~104°F) -20~40°C
OPERATING TEMPERATURE	IP54
IP RATING	DAMP LOCATION
MOISTURE RATING	

#### LIFETIME PERFORMANCE


WARRANTY	5 YEAR WARRANTY
LIFETIME HOURS	50,000 HOURS

#### CONSTRUCTION

HOUSING MATERIAL	ALUMINUM
TRIM MATERIAL	DIE-CAST ALUMINUM
PRODUCT WEIGHT	0.12 KG
PRODUCT DIMENSIONS	7.37 IN. X 7.37 IN. X 1.3 IN.
LENS DIAMETER	Ø4.41 IN.
LENS MATERIAL	NON-YELLOWING ACRYLIC



DURABLE  
**BUTTERFLY**  
CLIPS



E26  
**RETROFIT**  
PLUG

## TECHNICAL

5/6 INCH LED | 27K | THIN DISK LIGHT | WHITE ROUND | RETROFIT OR SURFACE MOUNT

NW-R-DSK-6-15W-27K



**HEIGHT**  
1.3 IN  
33 MM

**EXTERIOR DIAMETER**

Ø7.4 IN • Ø188 MM





**E26  
PLUG**



**LENS DIAMETER**

Ø4.4 IN • Ø112 MM

**110°**  
AVERAGE  
BEAM ANGLE

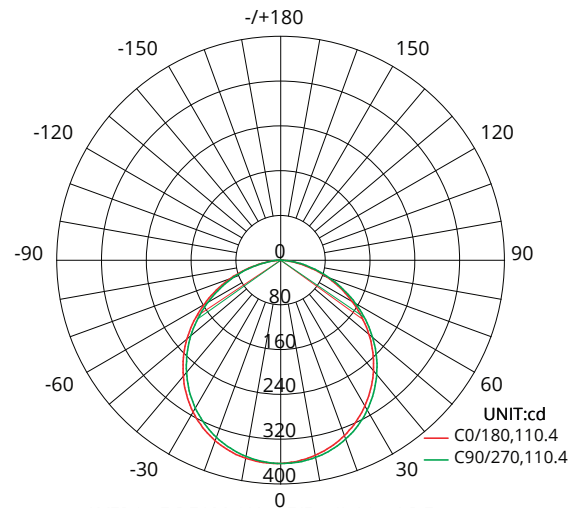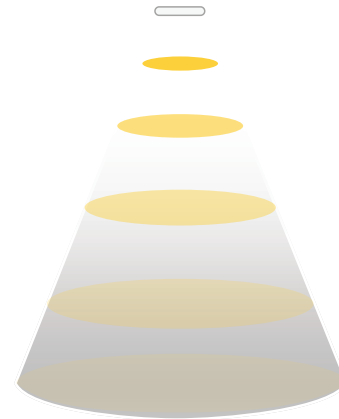

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

**1100 LUMENS**

## IN STORE DISPLAY




GIFT BOX




6 PACK BOX



12 PACK BOX



END CAP



PALLET