


# BUOY BALL

**IMPORTANT! FOLLOW INSTRUCTIONS PACKED WITH BUOY BALL TO INFLATE.**



**QUICK CLIPS MUST NOT BE ABLE TO BE REMOVED FROM CHAINS UNLESS USING TOOLS.**

**Periodically inspect buoy ball for safety.**

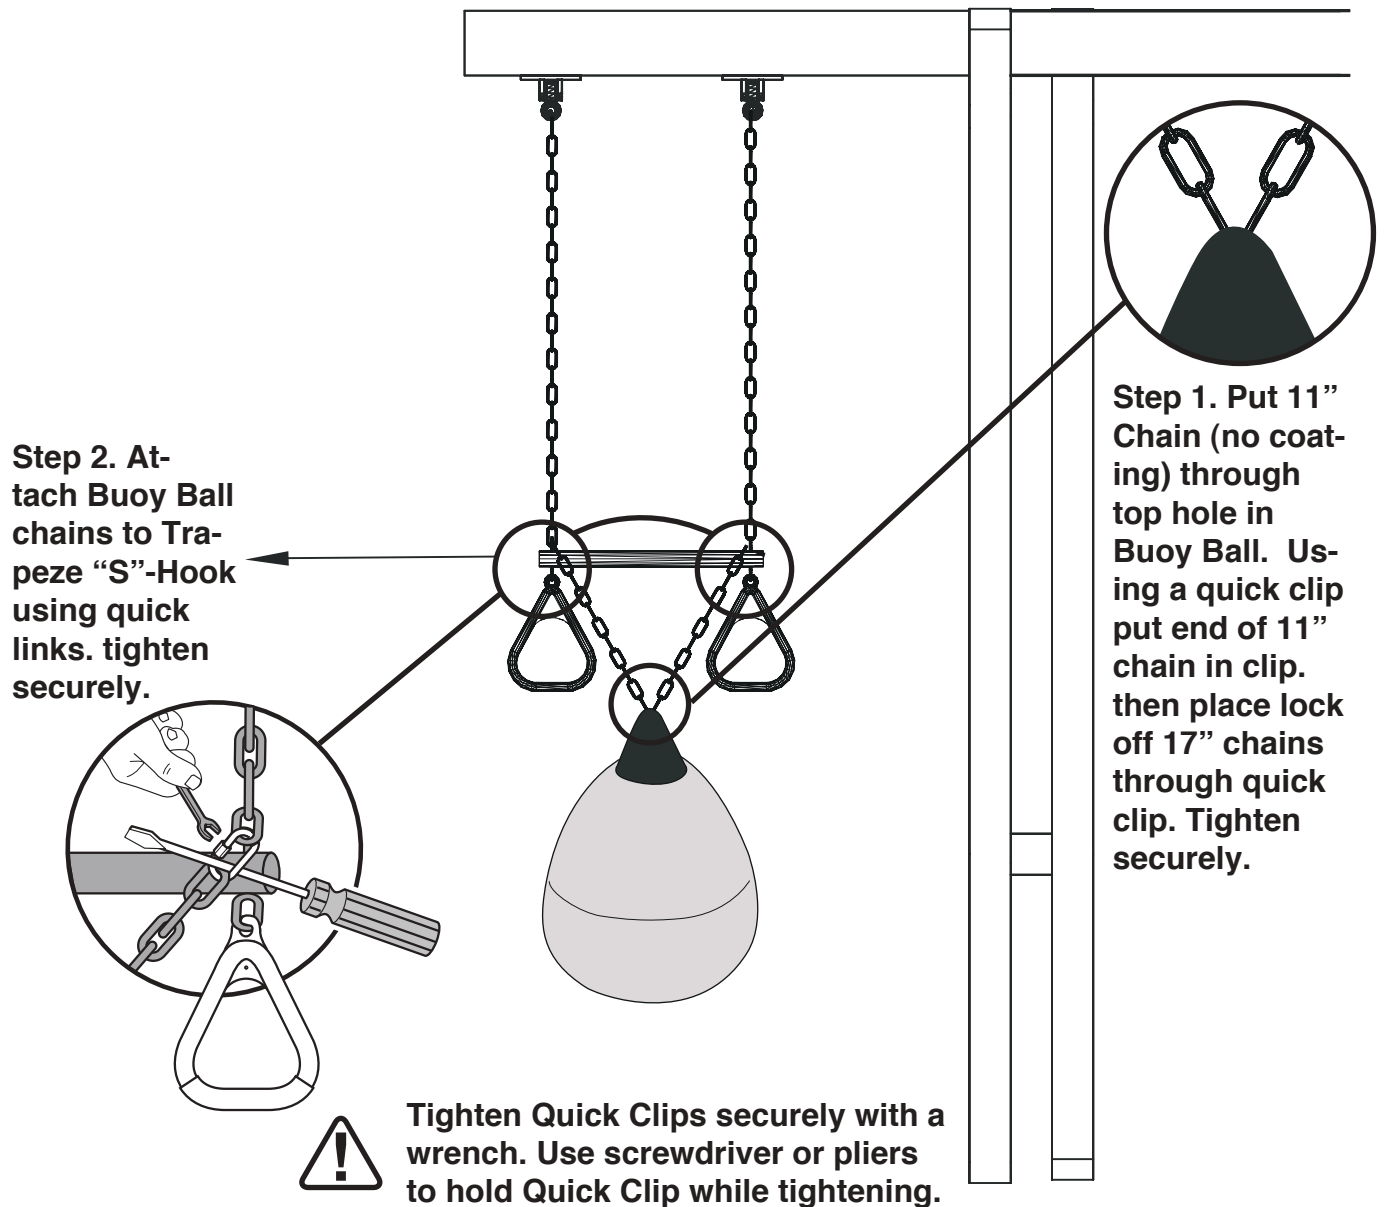

**Step 2. Attach Buoy Ball chains to Trapeze “S”-Hook using quick links. tighten securely.**

**Step 1. Put 11” Chain (no coating) through top hole in Buoy Ball. Using a quick clip put end of 11” chain in clip. then place lock off 17” chains through quick clip. Tighten securely.**

**Tighten Quick Clips securely with a wrench. Use screwdriver or pliers to hold Quick Clip while tightening.**

Specifications subject to change without notice. Les spécifications expsent pout changer sans la notification. Las especificaciones sujetas cambiar sin nota.  
Manufactured for / fabriqué pour / fabricado para: Swing-N-Slide • 1212 Barberry Drive, Janesville, Wisconsin • USA • 1-800-888-1232 • [www.swing-n-slide.com](http://www.swing-n-slide.com)  
Made in China / Fait en China / Hecho en China • Printed in U.S.A. Imprimé aux États-Unis. / Impreso en EE.UU.