

LG LAUNDRY
WT7155CW

 4.8 cu. ft. Top Load Washer with 4-Way™
 Agitator & TurboDrum™ Technology

4.8 cu. ft. Mega Capacity
 4-Way™ Agitator
 TurboDrum™ Technology
 6Motion™ Technology
 SmartDiagnosis™
 Deep Fill Option
 ColdWash™ Technology
 NeveRust™ Stainless Steel Tub
 Direct Drive Motor 10-Year Limited Warranty
 ENERGY STAR® Certified



AVAILABLE COLORS



| SUMMARY | | WASH OPTIONS | | MOTOR AND AGITATOR | |
|---|--|------------------------------------|---|--------------------------------|---|
| Type | Top Load Washer | No. of Options | 9 | Motor Type | Inverter Direct Drive Motor |
| Capacity (cu.ft.) | 4.8 cu. ft. | Options | ColdWash™, Signal, Delay Wash, Rinse+Spin, Deep Fill, Max, Extra Rinse, Control Lock, Spin Only | Max RPM | 800 |
| Matching Electric Dryer | DLE7150W | No. of Wash/Rinse Temps | 3 | Axis | Vertical |
| Matching Gas Dryer | DLG7151W | Wash/Rinse Temps | Hot, Warm, Cold | MATERIALS AND FINISHES | |
| Color | White (W) | No. of Spin Speeds | 3 | NeveRust™ Stainless Steel Drum | Yes |
| IMPELLER/Agitator | | Spin Speeds | High, Medium, Low | Cabinet | Painted Steel |
| Agitator | Yes | No. of Water Levels | Load Sensing | All Available Colors | White (W) |
| APPEARANCE | | No. of Soil Levels | 3 | Lid | White - Transparent Glass |
| Intelligent Electronic Controls with Dual LED Display | Yes | FABRIC CARE FEATURES | | POWER SOURCE | |
| Touch Buttons | Yes | ColdWash™ Option | Yes | Ratings | CSA Listed |
| Electronic Control Panel with LED Display | Yes | CONVENIENCE FEATURES | | Electrical Requirements | 120V @ 60Hz. |
| Dial-A-Cycle™ | Yes | SlamProof™ Lid | Yes | DIMENSIONS | |
| ENERGY | | TrueBalance™ Anti-Vibration System | Yes | Product (WxHxD) | 27" x 44 1/2" x 28 3/8" (57 1/5" H with lid open) |
| IMEF | 1.57 | SmartDiagnosis™ | Yes | Carton (WxHxD) | 29 19/32" x 46 3/8" x 31 3/8" |
| IWF | 6.5 | 3-Tray Dispenser | Yes | Weight (Product) | 127.9 lbs |
| WASH PROGRAMS | | LoadSense | Yes | Weight (Carton) | 147 lbs |
| No. of Programs | 8 | Status Indicator(s) | Yes | LIMITED WARRANTY | |
| Wash Programs | Normal, Heavy Duty, Deep Wash, Waterproof, Bedding, Delicates, Speed Wash, Tub Clean | End of Cycle Signal | Yes | Parts and Labor | 1 Year |
| | | Control Lock | Yes | Direct Drive Motor | 10 Years |
| | | Auto Suds Removal | Yes | Drum | 3 Years |
| | | Forced Drain System | Yes | UPC CODES | |
| | | Add Garment Indicator | Yes | WT7155CW (White) | 195174026700 |
| | | Leveling Legs | Yes | DLE7150W (White) | 048231028448 |
| | | | | DLG7151W (White) | 048231028455 |

WT7155CW

4.8 cu. ft. Top Load Washer with 4-Way™
Agitator & TurboDrum™ Technology

QUICK INSTALL & CLEARANCES

For full installation directions/clearances please refer to the corresponding User Manual and Installation Guide.

DIMENSIONS/CLEARANCES/WEIGHTS


| | |
|---------------------------|-------------------------------|
| A Width | 27" |
| B Height | 44 1/2" |
| C Depth | 28 3/8" |
| D Height with lid open | 57 1/5" |
| Carton Dimensions (WxHxD) | 29 19/32" x 46 3/8" x 31 3/8" |
| ENERGY / RATINGS | |
| IMEF | 1.57 |
| IWF | 6.5 |
| Ratings | CSA Listed |
| Electrical Requirements | 120V @ 60Hz. |

ELECTRICAL REQUIREMENTS

- The washer should be plugged into a 120-VAC, 60-Hz grounded 3-prong outlet. Plug in the washer. Improper connection of the equipment-grounding conductor can result in risk of electric shock. Check with a qualified electrician or service technician if you are in doubt as to whether the appliance is properly grounded. Do not modify the plug provided with the appliance. If it does not fit the outlet, have a proper outlet installed by a qualified electrician. Failure to follow these warnings can cause serious injury, fire, electrical shock, or death.
- The power outlet must be within 60 inches (1.5 m) of either side of the washer.
- The appliance and outlet must be positioned so that the plug is easily accessible.
- Do not overload the outlet with more than one appliance.
- The outlet must be grounded in accordance with current wiring codes and regulations.
- Time-delay fuse or circuit breaker is recommended.
- It is the personal responsibility and obligation of the product owner to have a proper outlet installed by a qualified electrician.




DIMENSIONS AND CLEARANCES

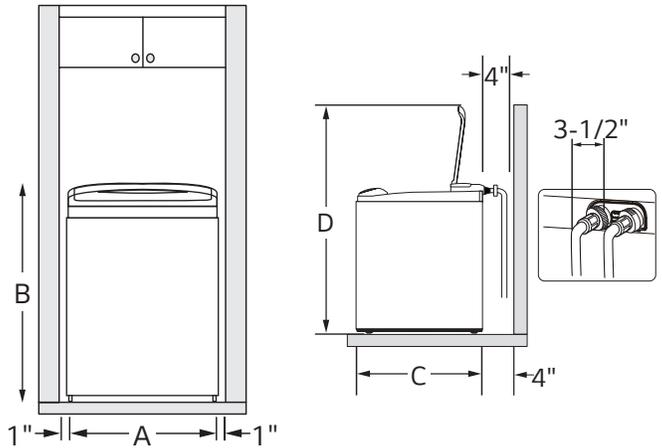

- To ensure sufficient clearance for water lines and airflow, allow minimum clearances of at least 1 in. (2.5 cm) at the sides and 4 in. (10 cm) behind the unit. Be sure to allow for wall, door, or floor moldings that may increase the required clearances.


CONNECTING THE WATER LINES

- LG recommends the use of LG hoses. Any leaking, property damage, or damage to the washing machine caused by an improper installation or by the use of non-LG hoses is not covered under the terms of the LG warranty and is the sole responsibility of the customer and/or an installer.
- Water supply pressure must be between 20 psi and 120 psi (138-827 kPa). If the water supply pressure is more than 120 psi, a pressure reducing valve must be installed.
- Inspect the threaded fitting on each hose and make sure there is a rubber seal in place in both ends of each hose.
- Connect the water supply hoses to the HOT and COLD water faucets tightly by hand and then tighten another 2/3 turn with pliers.
- Always run a gallon or two of water through each inlet hose to flush dirt, scale and other debris out of the water lines. Doing so will help prevent future problems with clogged filter screens, and will also allow you to verify which water line is hot and which is cold.
- Attach the hot water line to the hot water inlet on the back of the washer. Attach the cold water line to the cold water inlet on the back of the washer. Tighten the fittings securely. Turn ON both faucets all the way and check for leaks at both ends of the hoses.

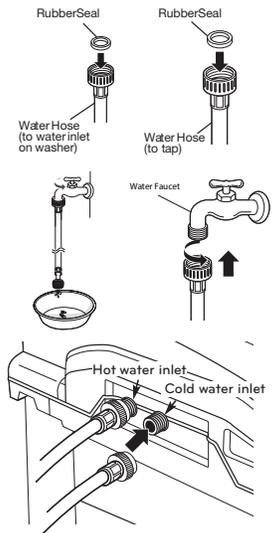

CONNECTING THE DRAIN HOSE

- The drain hose should always be properly secured. Failure to properly secure the drain hose can result in flooding and property damage.
- The drain must be installed in accordance with any applicable local codes and regulations.
- Make sure that the drain hose is not stretched, pinched, crushed, or kinked.
- Normal height of the end of the hose should be approximately 35"-47" (0.9-1.2 m) from the floor.
- Do not install the end of the drain hose lower than 29 in. (73.7 cm) or higher than 96 in. (243.8 cm) above the bottom of the washer or more than 60 in. (152.4 cm) away from the washer.
- Never create an airtight seal between the hose and the drain with tape or other means. If no air gap is present, water can be siphoned out of the tub resulting in poor wash/rinse performance or clothing damage.



STANDPIPE Option

- Do not insert the end of the drain hose into the standpipe more than 8 inches (20cm). **Doing so can cause siphoning, odors, or improper draining.**

LAUNDRY TUB Option

- Do not use this drain hose with a floor drain. The end of the drain hose must be at least 29 inches above the floor for proper draining to occur.