

Top Freezer Refrigerator

- 9 cu. ft. Capacity, 22" Width
- Multi-Air Flow System
- Modern Design
- Glass Shelves
- Fresh Produce Bin
- Premium LED Lighting

KEY FEATURES

AVAILABLE COLORS

- STAINLESS STEEL
- BLACK
- WHITE



PRODUCT FEATURES

SUMMARY

Refrigerator (cu.ft.)	6.6
Freezer (cu.ft.)	2.0
Total Capacity (cu.ft.)	8.6

ENERGY

ENERGY STAR® Certified	Yes
Energy Consumption (kWh/Year)	290

REFRIGERATOR

No. of Shelves	2 Fixed
Shelf Trim	White décor
Refrigerator Light	Yes

REFRIGERATOR DOOR

No. Door Bins (Right Door)	2 (1 Full + 1 Big)
Door Shape	Flat
Handle Type	Pocket Handle

FREEZER

Door Type	Flat
Handle Type	Pocket Handle
Drawers / Shelves	1
No. of Door Bins/Construction	2

COOLING

Compressor Type	Smart Inverter Compressor
Refrigerant	R600a / 60g / 2.12oz
Evaporator	1
Multi Air Flow Cooling	Yes
Door Cooling	Yes
Temperature Controls	Yes

MATERIALS AND FINISHES

Hidden Hinges	Yes
All Available Colors	Stainless Steel, Black, White

DISPLAY

Display Type	Knob Dial
Temperature Control	Manual

DIMENSIONS/CLEARANCES/WEIGHTS

Total (WxHxD)	21 7/8" x 61 7/8" x 25 1/8"
Width	21 7/8"
Height (Top of Hinge or Door cap Décor)	61 7/8"
Depth (with Handles)	25 1/8"
Width (Door Open X w/o Handle)	29 1/4"
Case Edge Clearance (Door Fully Open)	15 5/8"
Width (Door Open 90° with Handle)	29 1/4"
Width (Door Fully Open without Handle)	37 1/2"
Door Edge Clearance without Handle	1 1/4"
Height to Top of Case	61"
Height (Floor to Top of Freezer Door)	61 7/8"
Depth without Door	21 3/4"
Depth without Handles	25 1/8"
Depth (to Hinge Cover)	3"
Depth (Total with 90° Door Open)	44 3/4"
Installation Clearance	Sides 2", Top 2", Back 2"
Carton Dimensions (WxHxD)	22 7/8" x 65 x 26 1/8"
Weight (Unit/Carton)	105.8 lbs / 114.6 lbs

LIMITED WARRANTY

Parts & Labor	1 Year
Sealed System (Parts & Labor)	5 Years
Compressor (Parts & Labor)	5 Years
Linear Inverter Compressor (Parts only)	6-10 Years

UPC CODES


LT90S2000S	195174129807
LT90S2000B	195174129791
LT90S2000W	195174129753



LT09S2000W



LT09S2000B

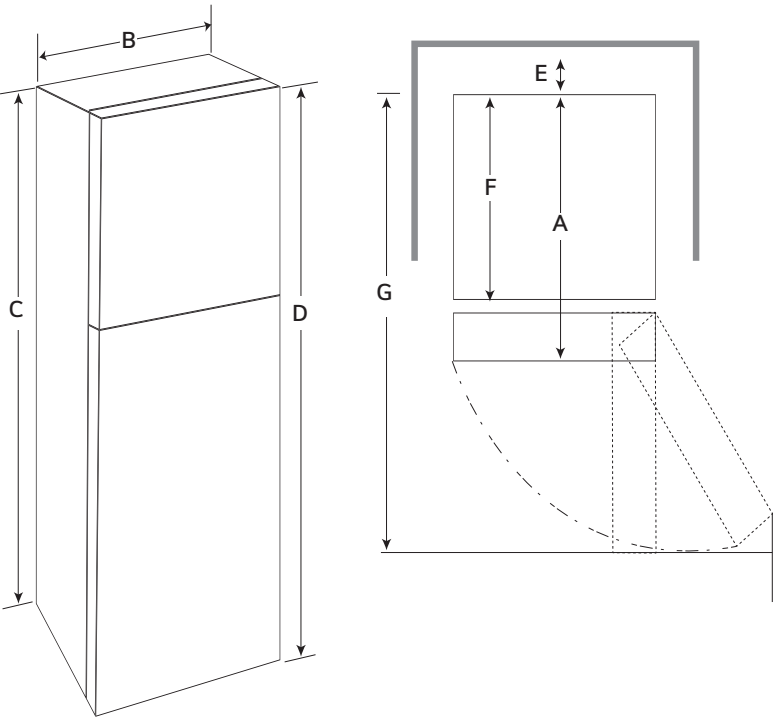

DIMENSION / CLEARANCES

Check the dimensions of the appliance and the installation path to ensure there is sufficient room to move the refrigerator through doors or narrow openings.

The installation location chosen for the refrigerator should allow space behind the unit for connection and airflow and space in front to open the doors and drawers.

Too small of a distance from adjacent items may result in lowered freezing capability and increased electricity consumption charges. Allow at least 2 inches (50 mm) between the back of the refrigerator and the wall.

Remember to allow enough room in front of the refrigerator to fully open the doors.

DIMENSIONS		
A	Depth without Handle	25 1/8" (637 mm)
B	Width	21 7/8" (555 mm)
C	Height to Top of Case	61" (1548 mm)
D	Height to Top of Hinge	61 7/8" (1573 mm)
E	Back Clearance	2" (50 mm)
F	Depth without Door	21 3/4" (551 mm)
G	Depth (Total with Door Open 90°)	44 3/4" (1137 mm)

LEVELING THE REFRIGERATOR

The refrigerator has two front leveling legs. Adjust the legs to alter the tilt from front-to-back or sideto side.
If the refrigerator seems unsteady or the doors do not close easily, adjust the refrigerator's tilt, using the instructions below:

1. Turn the leveling leg to the left to raise that side of the refrigerator or to the right to lower it. It may take several turns of the leveling leg to adjust the tilt of the refrigerator.
2. Open both doors, and check to make sure that they close easily. If the doors do not close easily, tilt the refrigerator slightly more to the rear by turning both leveling legs to the left. It may take several more turns, and be sure to turn both leveling legs the same amount.

NOTE
• A flare nut wrench works best, but an open-end wrench will suff Do not over-tighten.

