



Product Submittal	
Name	
Date	
Architect/Owner	
Contractor	
Tag	
Notes	

## CPVC Straight Stop Specification Sheet

### Description

Used to control and shut off water flow to fixtures or appliances for maintenance and repair. Featuring a 1/2 in. CPVC inlet connection and quarter-turn full-port brass ball valve.



### Features And Benefits

- Sleek chrome finish for an attractive appearance.
- Quarter-turn full-port brass ball valve.
- Compatible with CPVC pipe.

### Specification Data

Materials	
Valve body	DZR LF brass
Knurled Handle	ABS
Valve ball	DZR LF brass
Seat	PTFE

### Temperature Performance

- Minimum working temperature 33°F
- Maximum working temperature 160°F
- Maximum working pressure is 125 psi

### Flow Rate


- 3/8" Compression 4.0 GPM at 20 psi

## Part Listing

☐ CPVCS1238Z 1/2 in. CPVC x 3/8 in. OD Compression

## Dimensions

Part Number	DIM A (IN)	DIM B (IN)
CPVCS1238Z	1.38	4.65

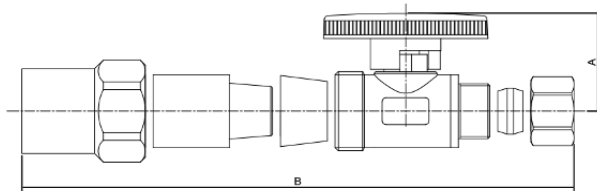

## Codes and Listing

cUPC

ASME A112.18.1

CSA B125.1

NSF/ANSI/CAN 61

NSF/ANSI 372

