




## **ASSEMBLY INSTRUCTION MODEL OLL-6004-AG-BH**

## **For Pendant**



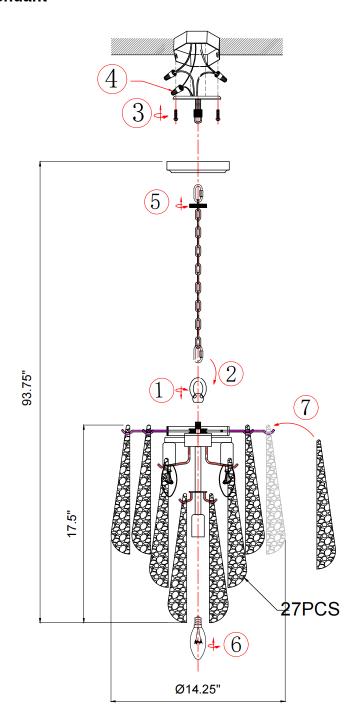

All electrical components must be

installed by a licensed electrician

in accordance with the National

Electric Code and the appropriate

local electrical codes.



You will need 4 Candelabra Base Bulb 40 Watts Recommended 60 Watts Max. USE LED BULBS FOR EXTENDED USE (This fixture is Dry rated)

#### How to Install

- **1.** Decide the preferred hanging height and choose the correct length of chain needed.
- 2. Screw the loop onto top of frame.
- 3. Attach the mounting bracket onto the outlet box.
- **4.** Raise the fixture up to the ceiling and do the wire connections. Slip the canopy up along the chain and over the mounting bracket. Secure with the collar loop ring.
- **5.** Attach the mounting strap onto the outlet box.
- 6. Install recommended bulb into the socket.
- **7.** Starting from the bottom of the frame. Dress the glass as illustrated.

### **Glass Sets**


1. 27 pcs Blush glass 3.25" x 11.5"





## **ASSEMBLY INSTRUCTION MODEL OLL-6004-AG-BH**

## For Ceiling

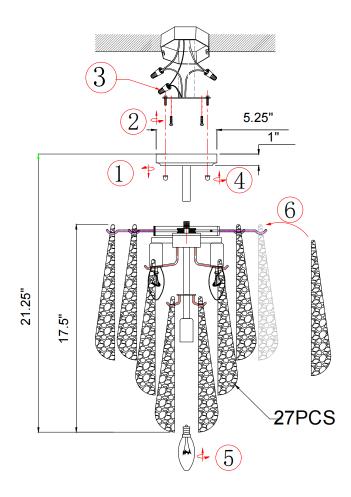



All electrical components must be installed by a licensed electrician in accordance with the National

Electric Code and the appropriate





You will need 4 Candelabra Base Bulb 40 Watts Recommended 60 Watts Max. USE LED BULBS FOR EXTENDED USE (This fixture is Dry rated)

#### How to Install

- 1. Screw the ceiling canopy kit onto the top of the frame.
- 2. Attach the mounting bracket onto the outlet
- 3. Raise the fixture up to the ceiling and do the wire connection. Secure the canopy with two ball nuts.
- 4. Install the recommended bulb into the socket.
- 5. Dress the glass as illustrated.


#### **Glass Sets**

1. 27 pcs Blush glass 3.25" x 11.5"





## PART NUMBER MODEL OLL-6004-AG-BH

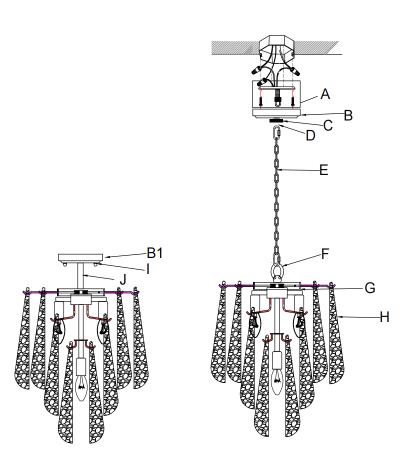

# Part Number

#### Part Numbers

A.(1)-Mounting hardware

B.(1)-Canopy,D5.25"\*H1" (XBN6004AGCAN5.25IN)

B1.(1)Ceiling canopyD5.25"\*H1" Center hole D1" (XBN6004AGCAN5.25IN 2)

C.(1)-Collar ring

D.(1)-Collar loop

E.(1)-Chain,D4MM,L72" (XBN6004AGCHA4MM)

F.(1)-Fixture loop,1\*D2"

G.(1)-Frame

H.(27)-Glass,W3.25" \* H11.5"

I. (2)-Ball nuts (XBN6004AGBANUT)

J. (1)-Short Stem,D0.5"\*H2" (XBN6004AGROD2IN)