

Home Care Technical Specification


1 1/2" Grab Bars – Concealed Screw

8900

Stock Numbers:

- ❑ **8912, R8912W, LR8712W – 12" Grab Bar**
Satin Finish
1 1/2" Bar, Concealed Screw Mounting
- ❑ **R8916, R8916W – 16" Grab Bar**
Satin or White Finish
1 1/2" Bar, Concealed Screw Mounting
- ❑ **R8918, R8918W, LR8918W – 18" Grab Bar**
Satin or White Finish
1 1/2" Bar, Concealed Screw Mounting
- ❑ **R8924, R8924W, LR8924W – 24" Grab Bar**
Satin or White Finish
1 1/2" Bar, Concealed Screw Mounting
- ❑ **R8930, R8930W – 30" Grab Bar**
Satin or White Finish
1 1/2" Bar, Concealed Screw Mounting
- ❑ **R8932, R8932W – 32" Grab Bar**
Satin Finish, White Finish
1 1/2" Bar, Concealed Screw Mounting
- ❑ **R8936, R8936W – 36" Grab Bar**
Satin or White Finish
1 1/2" Bar, Concealed Screw Mounting
- ❑ **8942, R8942W – 42" Grab Bar**
Satin or White Finish
1 1/2" Bar, Concealed Screw Mounting
- ❑ **DN8948, R8948W – 48" Grab Bar**
Satin Finish, White Finish
1 1/2" Bar, Concealed Screw Mounting

Dimensions:

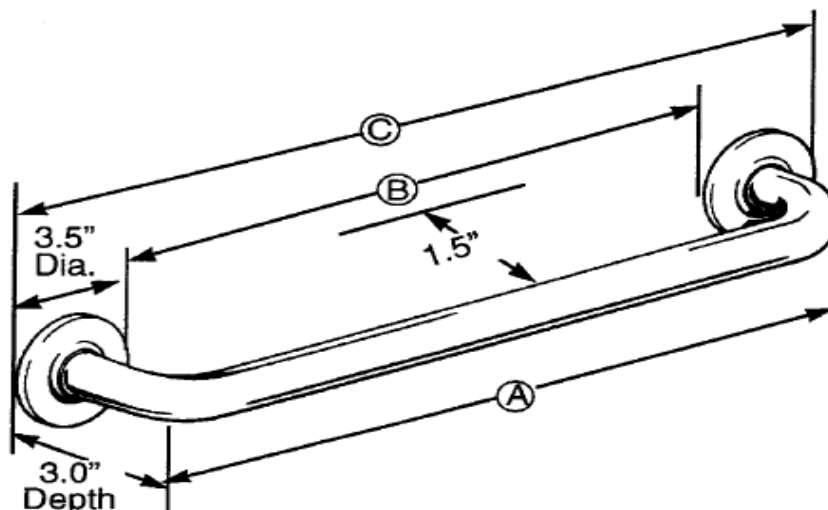

	A	B	C
8912	12"	8.175	15.25
8916	16"	12.175	19.25
8918	18"	14.175	21.25
8924	24"	20.175	27.25
8930	30"	26.175	33.25
8932	32"	28.175	35.25
8936	36"	32.175	39.25
8942	42"	38.175	45.25
8948	48"	44.175	51.25

Materials:

1 1/2" grab bar rods are formed from type 304 stainless steel tubing with a satin or white powder coated finish.
12" – 42" length is 20 gauge
48" length is 18 gauge

Compliance:

- ADA, ANSI, ASTM, CSA
- Tested to 500 lbs. pull

Installation Instructions:

1. Position unit on wall in desired location.
2. Mark mounting holes.
3. Drill starter holes.
4. Mount unit on wall using 2 1/4" screws (provided).
5. Snap flange covers into place.

Note: SecureMount Anchors are recommended for use in non-stud (hollow-wall) applications per installation instructions.

Stock Number: _____ 1 1/2" Grab Bars
 By Creative Specialties



25300 AL MOEN DRIVE • NORTH OLMDST, OH 44070
 CORPORATE HEADQUARTERS: (800) 321-8809 • FAX: (800) 848-6636
 INTERNATIONAL: (440) 962-2000 • FAX: (440) 962-2726
 CUSTOMER SERVICE (USA): 800-882-0116 • FAX: (888) 379-2720
 WWW.MOEN.COM

©Copyright Creative Specialties International

Literature #BA1676