




# INSTALLATION GUIDE

GUIDE D'INSTALLATION

GUÍA DE INSTALACIÓN

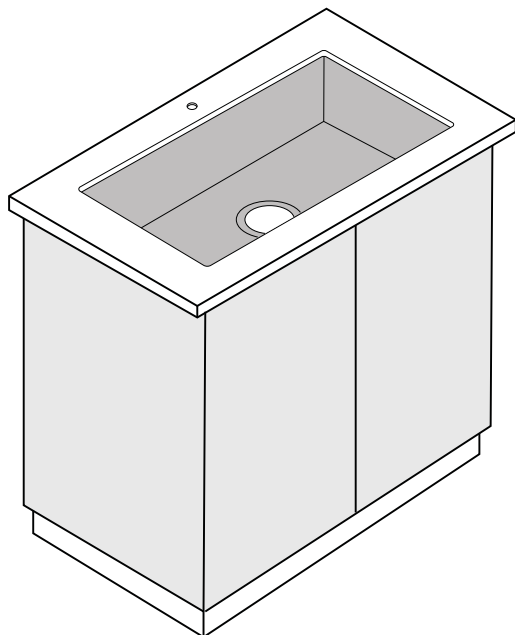

- **ENGLISH**  
INSTALLATION GUIDE  
UNDERMOUNT
- **FRANÇAIS**  
GUIDE D'INSTALLATION  
ENCASTRÉ
- **ESPAÑOL**  
GUÍA DE INSTALACIÓN  
EMPOTRADO BAJO LA CUBIERTA  
DE GABINETE

PAGE

**2 - 4**

**5 - 7**

**8 - 10**

## Mounting System - Type A


Système de montage - Type A

Sistema de Montaje - Tipo A

Countertop

Comptoir

Cubierta de gabinete

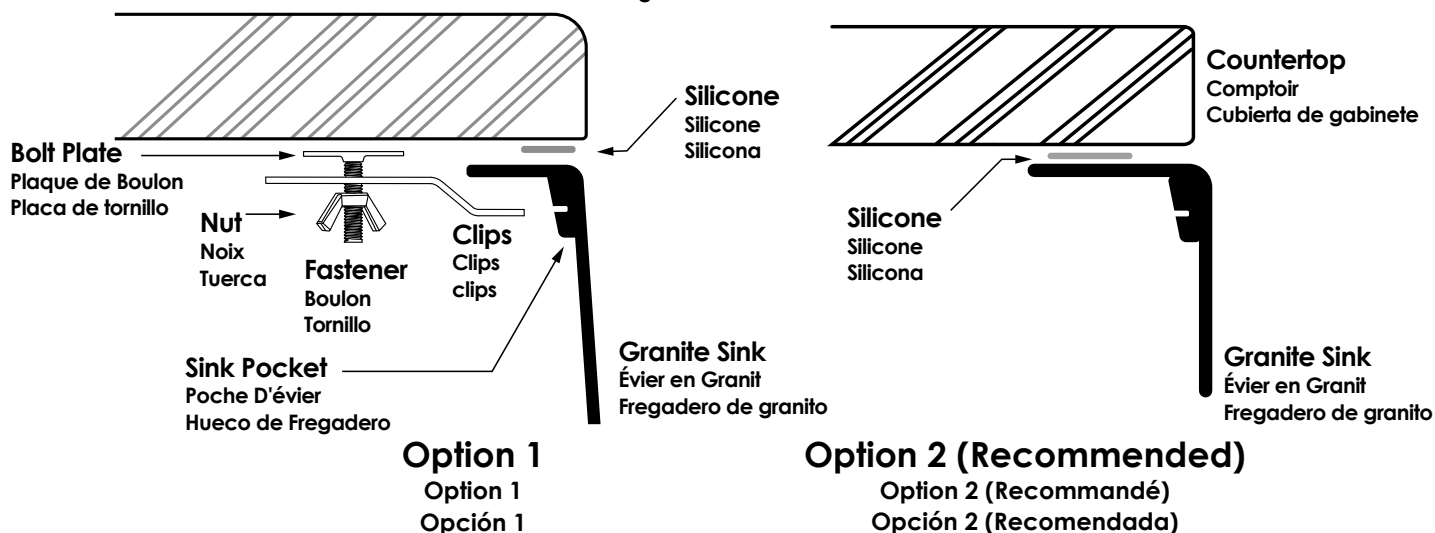

THANK YOU  
FOR  
CHOOSING  
STYLISH®

We work hard to provide innovative and beautiful designs that last and delight your home.

We would love to hear from you. Tell us what you think of the product by leaving a review through the dealer where you have purchased this product.

Your feedback is important for our continuous improvement and will also let other customers make the correct choice.

Stylish International Inc.

[www.stylishkb.com](http://www.stylishkb.com)

[stylish.international.inc](https://www.instagram.com/stylish.international.inc)

[care@stylishkb.com](mailto:care@stylishkb.com)

+1-855-789-5352

Products and specifications shown are subject to change without notice. Please contact our technical support at [care@stylishkb.com](mailto:care@stylishkb.com) for any further queries, replacement parts requests, etc. ©2021 Stylish® all right reserved.



# INSTALLATION GUIDE

## UNDERMOUNT

COMPOSITE GRANITE SINK

IF YOU HAVE PURCHASED A **UNDERMOUNT SINK**, PLEASE MAKE SURE TO READ THESE INSTRUCTIONS CAREFULLY

1

### Prior to installation:


Make sure that you have all necessary parts by checking the parts list. If any part is missing, please contact Stylish® Customer Service at [+1-855-789-5352](tel:+1-855-789-5352) for a replacement.

Inspect the sink prior to installation to make sure that it has not been damaged during shipping.

You may use the cut-out template provided or download DXF file from [www.stylishkb.com](http://www.stylishkb.com), the file is available under each sink model.


Observe all plumbing and building codes according to your state requirements.

2

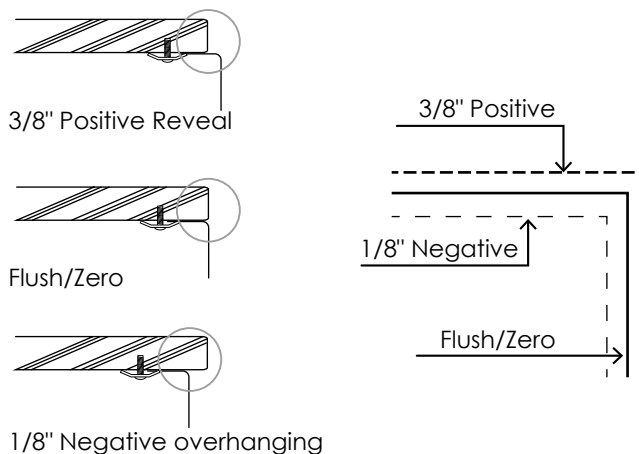

Use scissors to cut along the line of the paper template for you desired reveal type (Negative, Positive or Flush Reveal)


3

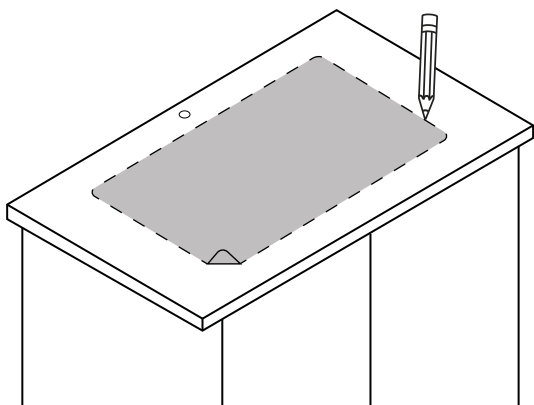

Place cut-out template in desired position on countertop locating center of the bowl over cabinet.

Note: Sink installation is normally performed by the countertop provider.

4

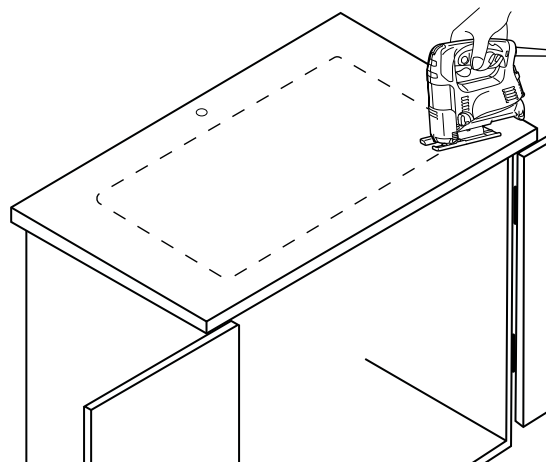

Trace the outline of the template and cut countertop according to templated outline using appropriate cutting tools. Template is for guide only. Use physical sink to ensure accurate cut-out opening.

It is recommended to use the actual sink dimensions to ensure the most accurate cut out. Drawing or template are for reference.

### WARRANTY

For additional technical assistance or for any questions or concerns about your kitchen sink's warranty, please contact us.

[www.stylishkb.com/warranty](http://www.stylishkb.com/warranty)


[www.stylishkb.com](http://www.stylishkb.com)

[care@stylishkb.com](mailto:care@stylishkb.com)


+1-855-789-5352

5


### Option 1 (Using Anchor Clips)

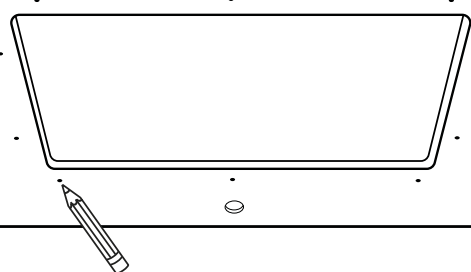


Distribute clips evenly around sink cut-out, determine where to glue the bolt plates. Stick bolt plates under the countertop and let adhesive to cure before applying any weight.

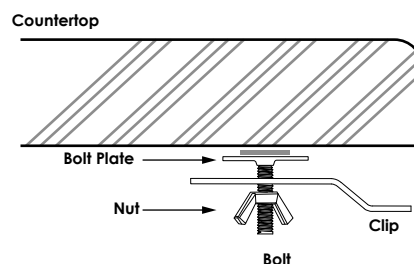

Once the bolt plates are glued and cured, loose install remaining components of the clip including the wing nut.

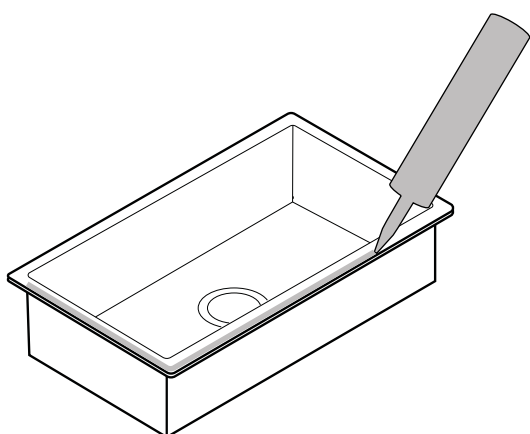


Clean sink flange and underside of cut-out area of countertop, making sure that the area is smooth and free of debris. Apply continuous bead of silicone caulk evenly on top of sink flange.

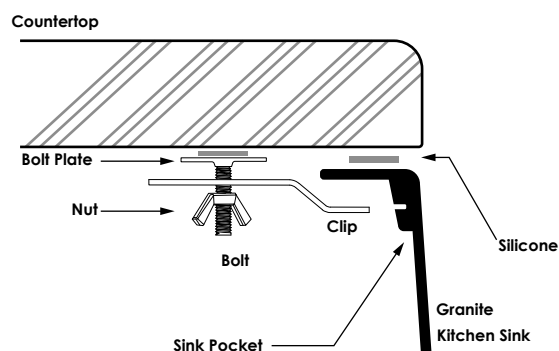


Position sink flange and insert clip into sink pocket, then the nuts can be tightened to clamp the sink, previous to perform this operation, the sink flange should have a continuous bead of silicone caulk.

6

### Option 2 (Recommended)

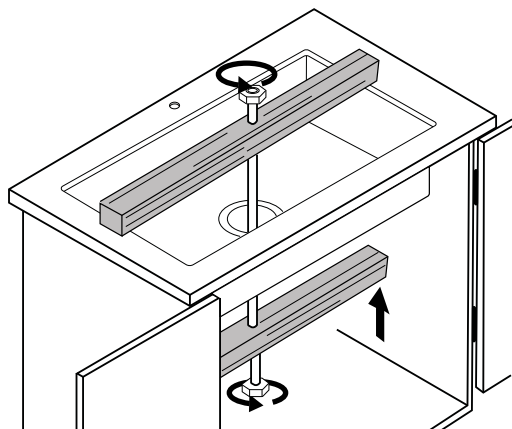


Clamp the sink and hold in place while adhesive cures. There are different methods, we suggest using a couple of pieces of wood with a threaded rod. Set one piece of wood under the sink and another over the countertop.

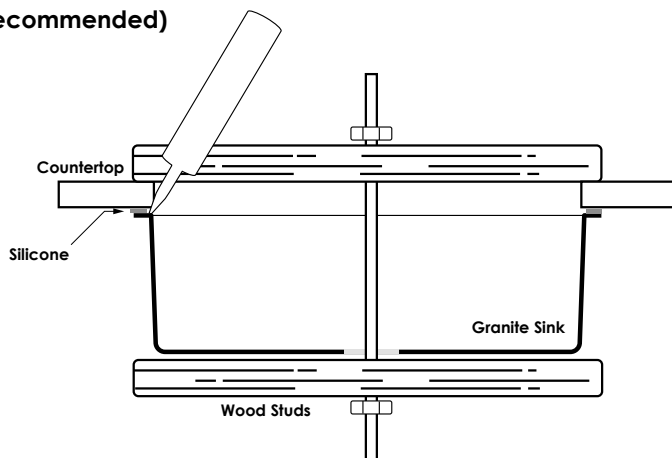

Clamp the boards so the sink stays suspended about 1 in below the countertop. Clean sink flange and underside of cut-out area of countertop, making sure that the area is smooth and free of debris. Apply continuous bead of silicone caulk evenly on top of sink flange.

7

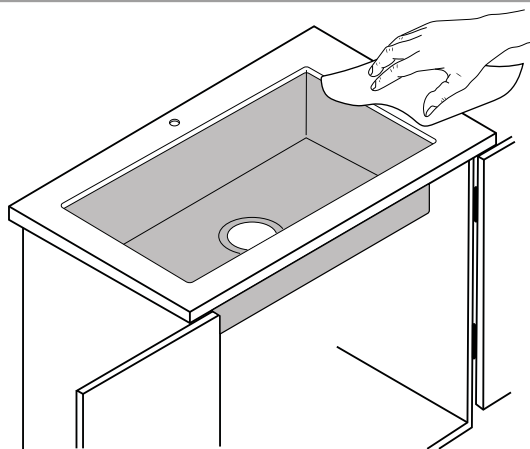

Check alignment of sink again and tighten fasteners to secure sink. Wipe away excess silicone caulk with damp cloth. Connect drain and water supply according to manufacturer's instruction.

**For Option 1 and 2:** To allow silicone to cure, it is recommended to wait for 24 hours at least before removing installation device.

### CARE AND CLEANING

Apply hot water and a few drops of mild dish soap.

Scrub the sink using the sponge.

After you have thoroughly scrubbed the sink, rinse it and dry using a soft cloth.


Optional: you could use a small amount of mineral oil to restore your sink's shine.



# INSTALLATION GUIDE

GUIDE D'INSTALLATION

GUÍA DE INSTALACIÓN

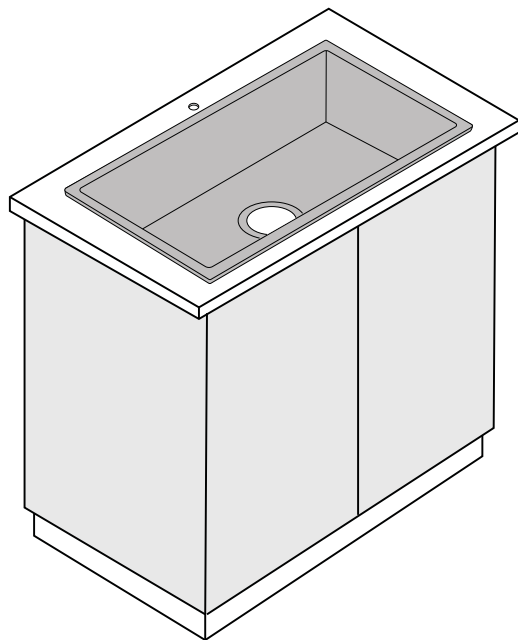

- **ENGLISH**  
INSTALLATION GUIDE  
DROP-IN
- **FRANÇAIS**  
GUIDE D'INSTALLATION  
SOUS LE COMPTOIR
- **ESPAÑOL**  
GUÍA DE INSTALACIÓN  
EMPOTRADO SOBRE LA CUBIERTA  
DE GABINETE

PAGE

**2 - 3**


**4 - 5**

**6 - 7**

## Mounting System

Système de montage

Sistema de Montaje

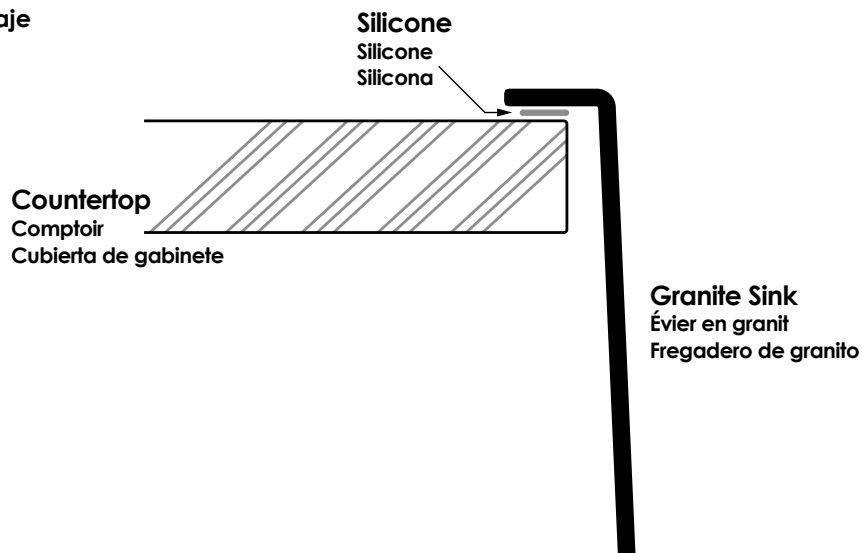

THANK YOU  
FOR  
CHOOSING  
STYLISH®

We work hard to provide innovative and beautiful designs that last and delight your home.

We would love to hear from you. Tell us what you think of the product by leaving a review through the dealer where you have purchased this product.

Your feedback is important for our continuous improvement and will also let other customers make the correct choice.

Stylish International Inc.

[www.stylishkb.com](http://www.stylishkb.com)

[stylish.international.inc](https://www.instagram.com/stylish.international.inc)

[care@stylishkb.com](mailto:care@stylishkb.com)

+1-855-789-5352

Products and specifications shown are subject to change without notice. Please contact our technical support at [care@stylishkb.com](mailto:care@stylishkb.com) for any further queries, replacement parts requests, etc. ©2021 Stylish® all right reserved.



# INSTALLATION GUIDE

## DROP-IN

COMPOSITE GRANITE SINK

IF YOU HAVE PURCHASED A **DROP-IN SINK**, PLEASE MAKE SURE TO READ THESE INSTRUCTIONS CAREFULLY

1

### Prior to installation:


Make sure that you have all necessary parts by checking the parts list. If any part is missing, please contact Stylish® Customer Service at [+1-855-789-5352](tel:+1-855-789-5352) for a replacement.

Inspect the sink prior to installation to make sure that it has not been damaged during shipping.

You may use the cut-out template provided or download DXF file from [www.stylishkb.com](http://www.stylishkb.com), the file is available under each sink model.


Observe all plumbing and building codes according to your state requirements.

2

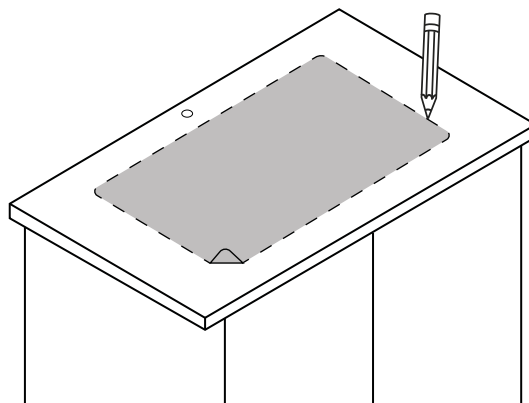


Place cut-out template in desired position on countertop locating center of the bowl over cabinet.

3

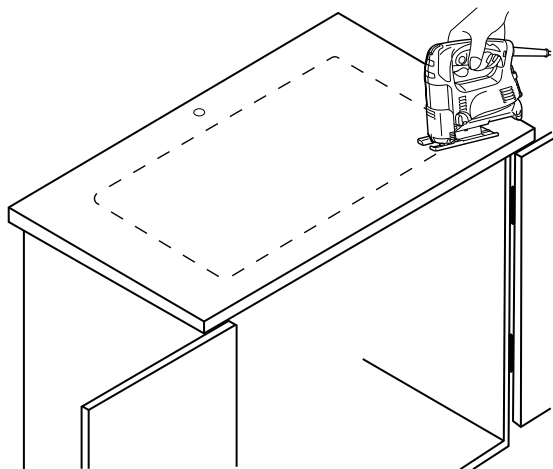

Trace the outline of the template and cut countertop according to templated outline using appropriate cutting tools. Template is for guide only. Use physical sink to ensure accurate cut-out opening.

4

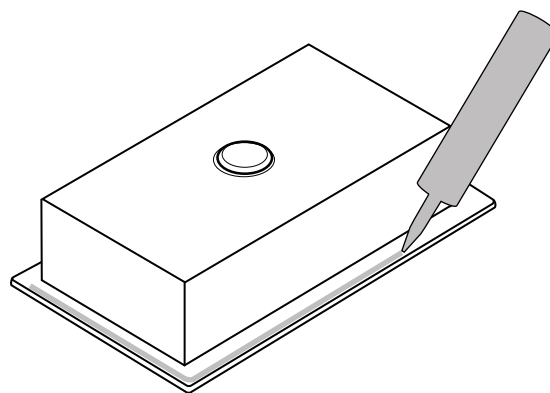

Clean sink flange and underside of cut-out area of countertop, making sure that the area is smooth and free of debris. Apply continuous bead of silicone.

### WARRANTY

For additional technical assistance or for any questions or concerns about your kitchen sink's warranty, please contact us.


[www.stylishkb.com/warranty](http://www.stylishkb.com/warranty)

[www.stylishkb.com](http://www.stylishkb.com)

[care@stylishkb.com](mailto:care@stylishkb.com)


+1-855-789-5352

5

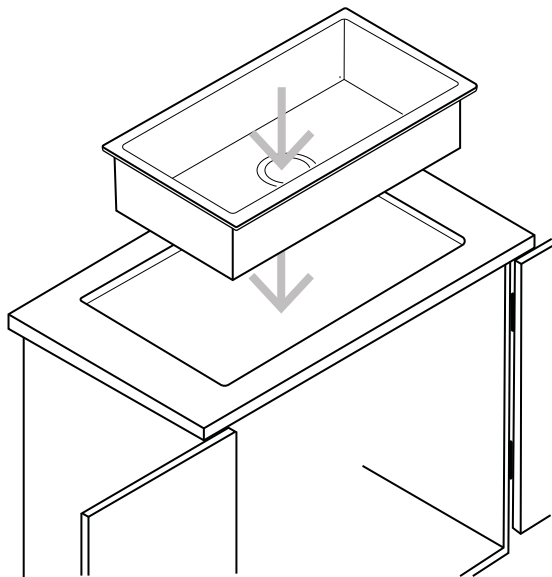


Drop-in on countertop opening.

6

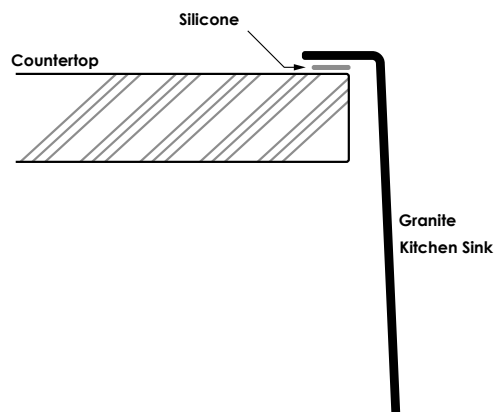


Position and align sink over opening. Press sink onto silicone seal.

7

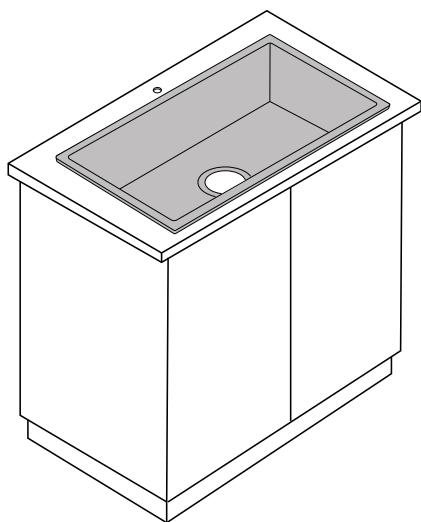

Check alignment of sink again to secure sink. Wipe away excess silicone caulk with damp cloth. Connect drain and water supply according to manufacturer's instruction.

8

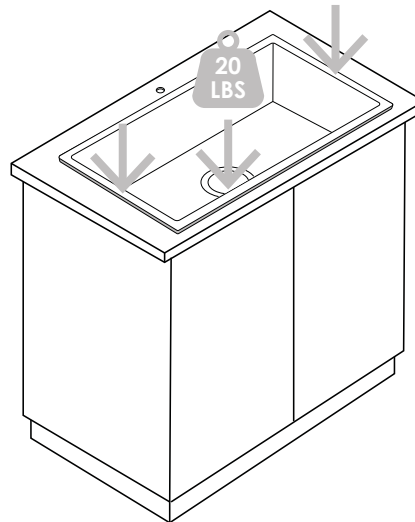

After sink is positioned and set on countertop, it is recommended to wait for 24 hours to allow silicone adhesive to cure, also keep at least 20 pounds weight on the sink to ensure full sealing and curing of the silicone on the whole mounting flange.

### CARE AND CLEANING

Apply hot water and a few drops of mild dish soap.

Scrub the sink using the sponge.

After you have thoroughly scrubbed the sink, rinse it and dry using a soft cloth.

Optional: you could use a small amount of mineral oil to restore your sink's shine.