



Two-piece round-front toilet, 1.28 gpf K-3997-RA

Features

- Two-piece design
- Round-front bowl offers an ideal solution for smaller bathrooms and powder rooms
- Right-hand Polished Chrome trip lever
- Combination consists of the K-4467-RA tank and the K-4197
- Coordinates with other products in the Wellworth collection
- KOHLERs canister flush valve harnesses the natural force of gravity and optimizes flushing performance
- Eligible for consumer rebates in some municipalities
- 1.28 gpf (4.8 lpf)
- 2-1/8" (54 mm) fully glazed trapway
- Class Five® canister optimizes the flow out of the tank, harnessing gravity and the natural powerful reducing cascade of water to increase the power and effectiveness of the flush

Installation

- Standard 12" (305 mm) rough-in
- Three-bolt quick-connect installation
- Seat and supply line sold separately

Recommended Products/Accessories

K-5589 Purefresh® Deodorizing round-front toilet seat K-76923 PureWash® M250 Quiet-Close™ round-front toilet seat with antimicrobial agent K-5420 Low-Profile Bolt Caps

K-9379 Trip Lever

1023457 Wax Ring/Hardware Kit

1265114 Connector Hose

K-23726 Drain treatment

K-4639-RL Cachet® ReadyLatch® Quiet-Close™ round-front

toilet seat

Included Components

K-4197 Round-front toilet bowl K-4467-RA Toilet tank, 1.28 gpf





Codes/Standards

ASME A112.19.2/CSA B45.1 DOE - Energy Policy Act 1992 EPA WaterSense® **IAPMO Certification**

KOHLER® Toilets and Seats Limited Warrantv

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.


Color	Code	Description
	0	White
	96	Biscuit





KOHLER

Two-piece round-front toilet, 1.28 gpf K-3997-RA

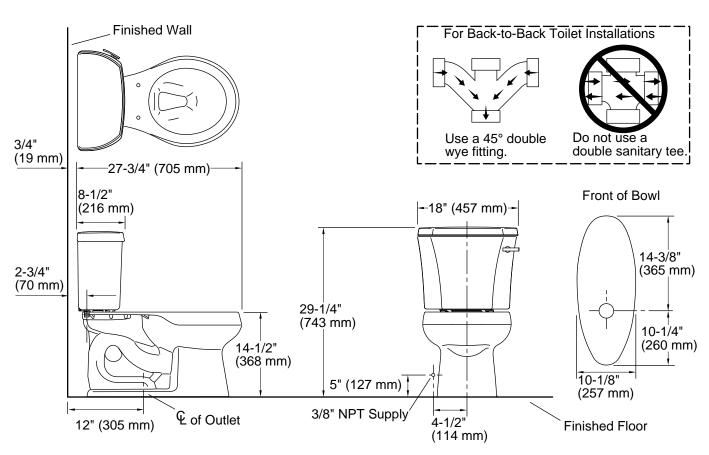

Technical Information

All product dimensions are nominal.

Toilet type: Floor-mount

Waste Outlet: Floor

Bowl shape: Round-front
Flush type: Class Five
Trap passageway: 2-1/8" (54 mm)

Water surface size: 10-1/2" x 7-3/4" (267 mm x 197 mm)

Rim to water 5-1/4" (133 mm)

surface:

Rough-in: 12" (305 mm) Seat-mounting 5-1/2" (140 mm)

holes:

Notes

Install this product according to the installation instructions.

For back-to-back toilet installations: Use only a 45° double wye fitting.

