

Location:



SYMMONS® Duro ActivSense™



S6360B & S6360E

Sensor Lavatory Faucet

Specification Submittal


Model Numbers		Feature Highlights
☐ S6360B	<i>Sensor Lavatory Faucet 6X1.5V Batteries included</i>	• LEED Rating • Optional hygiene flush • Robust brass body • 0.5 GPM (1.9L/min) Aerator Installed. • Includes Optional 0.35 GPM (1.3L/min) and 1.0 GPM (3.8L/min) Aerators • Adjustable settings • Easy to install • ADA compliant • Vandal Resistant Aerator - Requires Wrench to remove • Anti Rotation Pins
☐ S6360E	<i>Sensor Lavatory Faucet 9V Transformer</i>	
Finish Options/Modifications		
☐ M	<i>Temperature mixer control</i>	
☐ STN	<i>Satin Nickel finish</i>	
☐ MB	<i>Matte Black finish</i>	
Note: Append appropriate suffix to model number.		
Options <i>(sold as separate line items add appropriate)</i>		Compliance
☐ RC6960	<i>Remote Control</i>	- ASME A112.18.1/CSA B125.1 - NSF/ANSI 372 - UL# E311169 (USA & Canda) - Buy American Act Compliant - ADA Compliant 
☐ SD6360BL	<i>Matching DURO soap dispenser.</i>	
☐ USDP4	<i>4 Inch Deck Plate.</i>	
☐ USDP8	<i>8 Inch Deck Plate.</i>	
☐ SF259	<i>Converts S6360B to AC powered (S6360E)</i>	
☐ SF278	<i>120V Cable 4.5 feet long Hard wired 15 Amp circuit. (QTY:10) 12 Volt Outputs , 4.2A Any combination of devices 10 devices maximum (SF277 not included)</i>	Warranty
☐ 8210CK	<i>MaxLine® Tempering Valve</i>	Limited Lifetime - to the original end purchaser in consumer/residential installations. 10 Years - for commercial/industrial installations. Refer to www.symmons.com/warranty for complete warranty information. 

Architectural/ Engineering Specification


Symmons Duro ActivSense Sensor Lavatory Faucet _____ With LEED Rating, Optional hygiene flush, Robust brass body, 0.5 GPM (1.9L/min) Aerator Installed, Includes Optional 0.35 GPM (1.3L/min) and 1.0 GPM (3.8L/min) Aerators, Adjustable settings, Easy to install, ADA compliant, Vandal Resistant Aerator - Requires Wrench to remove. Anti Rotation Pins. 10 Year commercial Warranty. ASME A112.18.1/CSA B125.1, NSF/ANSI/CAN 61: Q<1, NSF/ANSI 372, UL# E311169 (USA & Canada), Buy American Act Complaint, ADA Compliant. Available options include: "Remote Control, Matching DURO soap dispenser", "4 Inch Deck Plate", "8 Inch Deck Plate", "Converts S6360B to AC powered (S6360E)", "120V Cable 4.5 feet long Hard wired 15 Amp circuit.(QTY:10) 12 Volt Outputs", "4.2A Any combination of devices 10 devices maximum (SF277 not included)".

Optional Power Layout

1 Devices - 1 Power Supply

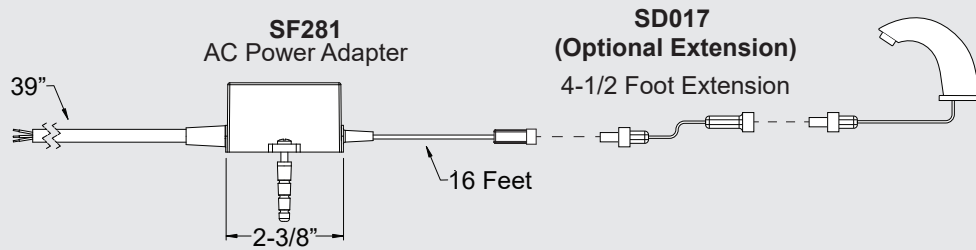


2 Devices - 1 Power Supply

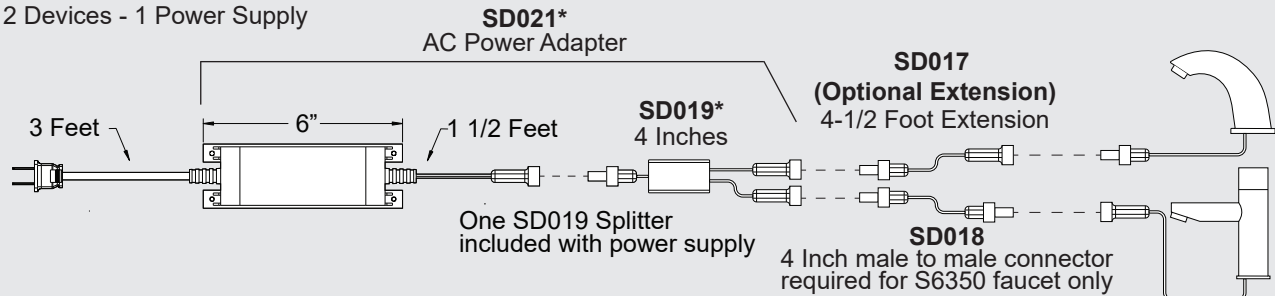

*SD019 is required when powering a faucet from the SD021 power supply.

3 Devices - 1 Power Supply



Maximum of 3 Devices per power supply

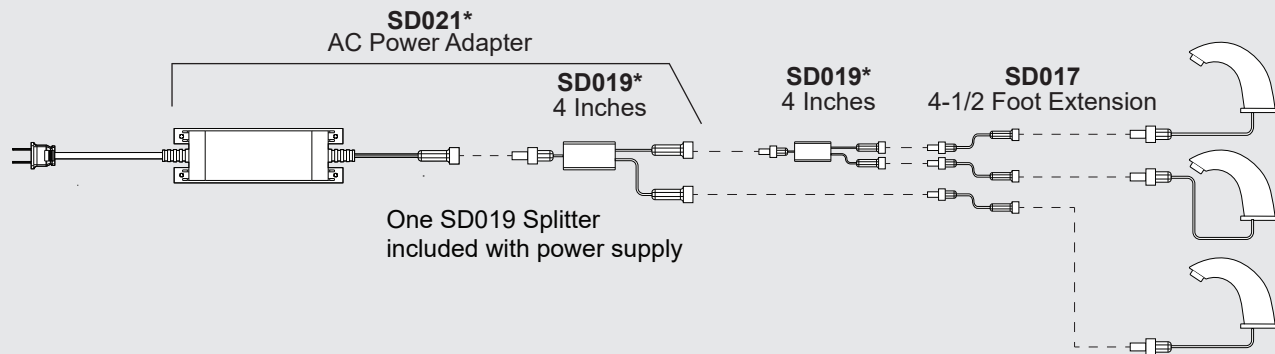


*SD019 is required when powering a faucet from the SD021 power supply.

10 Devices - 1 Power Supply

SF278
120V Cable 4.5 feet long
Hard wired 15 Amp circuit.
(QTY:10) 12 Volt Outputs , 4.2A
Any combination of devices
10 devices maximum
(SF277 not included)

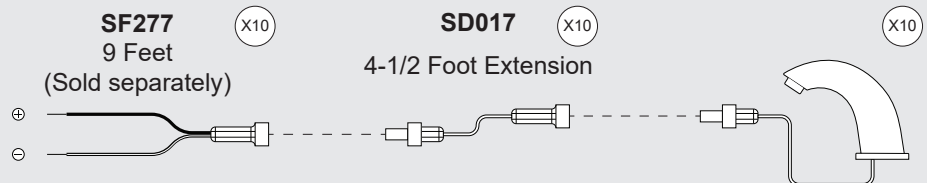


Installation /Repair Parts

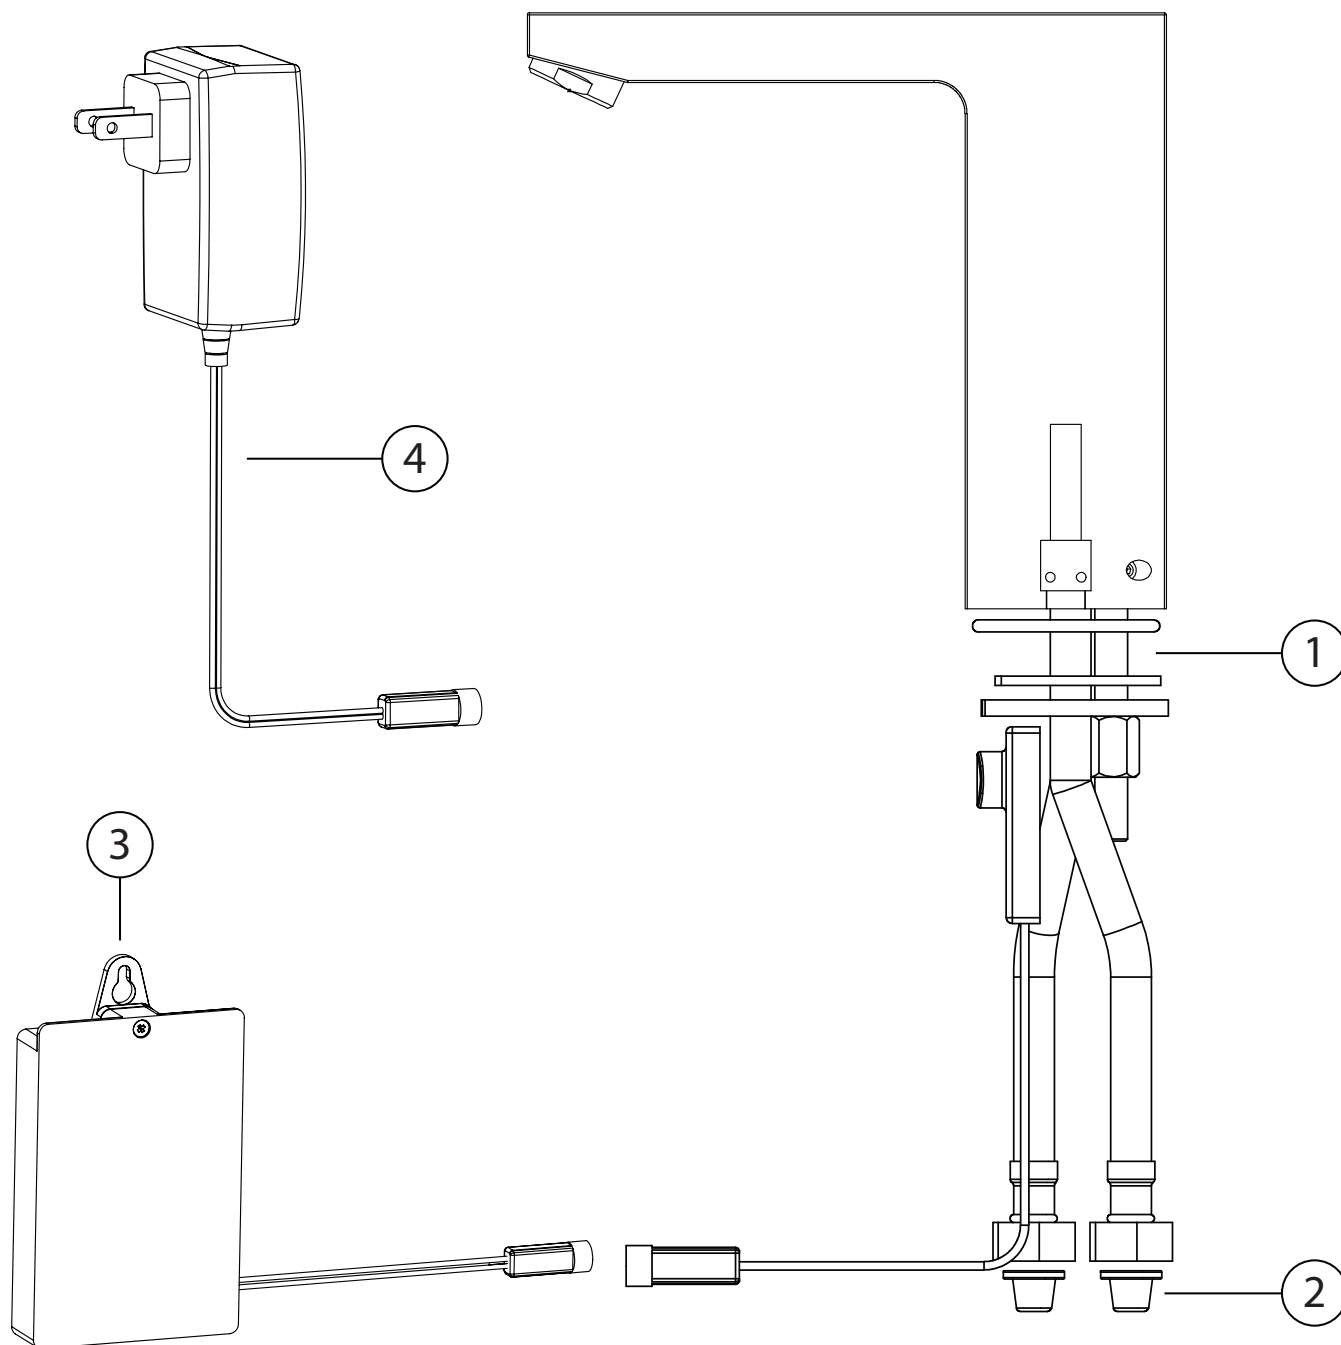

Replacement Parts		
Item	Description	Part No.
1	Seals and screws kit	SF280
2	Filter	SF273
3	Battery box (batteries not included)	SF275
4	9V AC transformer	SF259

Dimensions

S6360BM / S6360EM

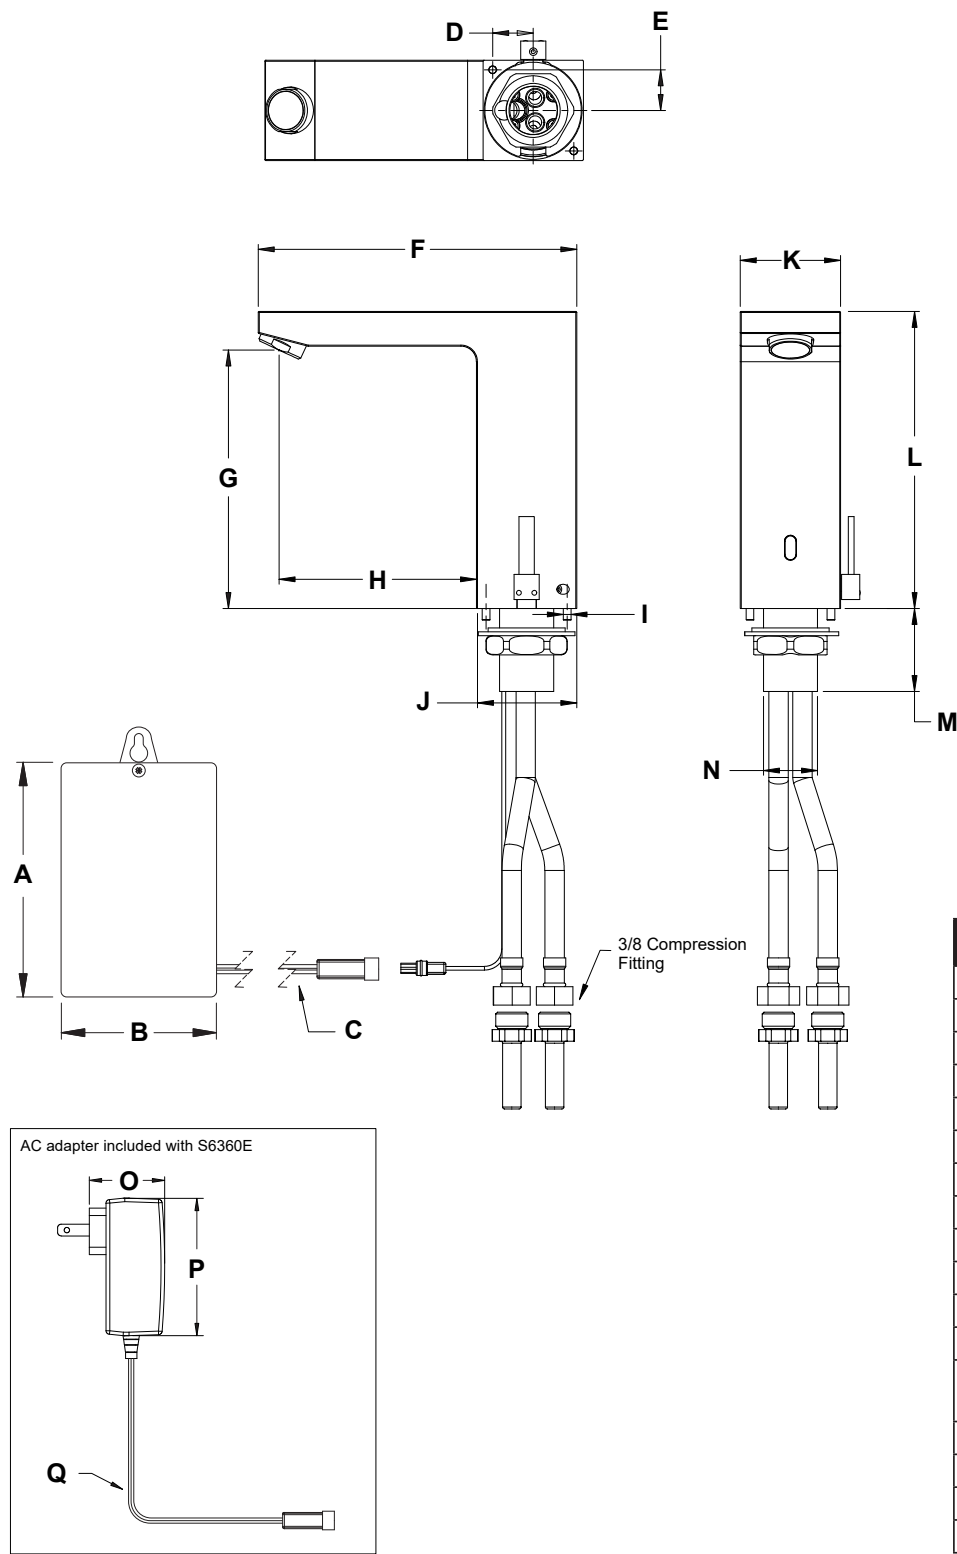

Measurements	
A	5" , 127 mm
B	3" , 76 mm
C	18" , 457 mm
D	7/8" , 21 mm
E	7/8" , 21 mm
F	6-1/2" , 165 mm
G	5-1/4" , 134 mm
H	4 , 102 mm
I	Ø1/8" , Ø4 mm
J	Max: 2" , 52 mm
K	2" , 52 mm
L	6-1/8" , 154 mm
M	Deck Thickness: Max. 1-3/4" , 43 mm
N	1-1/8" , 28 mm
O	1-5/8" , 41 mm
P	2-7/8" , 74 mm
Q	15' , 4.5 m

Note: Dimensions subject to change without notice.