



AURORA™ NO-CALK® SOLAR FLASHINGS TECHNICAL SPECIFICATION

Job Name _____	Item # _____
Location _____	
Engineer _____	Contractor _____
PO # _____	Tag _____
Representative _____	

SPECIFICATIONS

Oatey Aurora No-Calk Solar Flashings can be used in commercial and residential applications where a watertight seal for roof penetrations around the piping for solar mounting system is required. Low profile flashing collar design provides a clean finished appearance. Solar Flashings are available in Soft Aluminum, Aluminum and Galvanized Bases.

APPROVALS AND LISTINGS


IAPMO Listed



DESCRIPTION

All dimensions in inches.

- Solar Flashing slides over piping penetrations.
- Non-fading sealing collar.
- Not for hot-mopped or built-up installations.
- Do not use paint or petroleum based products on rubber collars.

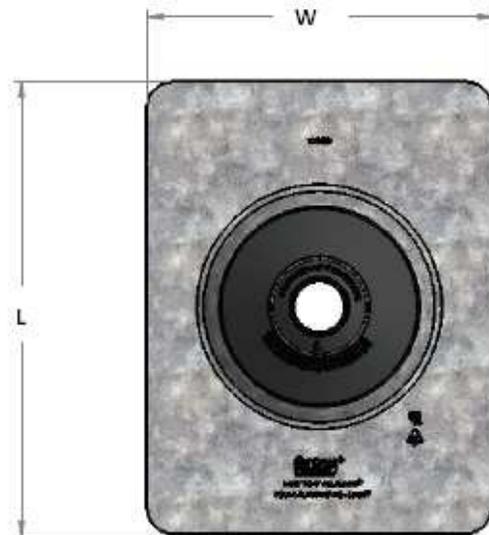

PRODUCT SELECTOR

AURORA™ NO-CALK® SOLAR FLASHINGS

✓	Product Number	Description	Length (L)	Width (W)	Height (H)	Pack	Ctn. Weight (lbs.)
	11831	½" – 1" Galvanized No-Calk Solar Flashing	18	18	2.4	12	23
	11833	½" - 1" Soft Aluminum No-Calk Solar Flashing	18	18	2.4	12	15
	12801	½" – 1" Galvanized No-Calk Solar Flashing	12-½	9-½	1.4	12	9
	12803	1-½" – 3" Galvanized No-Calk Solar Flashing	12-½	9-½	2.4	12	10
	12802	½" – 1" Aluminum No-Calk Solar Flashing	12-½	9-½	1.4	12	5
	12804	1-½" –3" Aluminum No-Calk Solar Flashing	12-½	9-½	2.4	12	5

Data is subject to manufacturing tolerances.

Access BIM/Revit content through www.oatey.com