

---

## ASSEMBLY INSTRUCTIONS: CL-TWL20K | 20,000LM DUAL HEAD LED WORK LIGHT WITH TRIPOD

---



### **WARNING:**

You should always follow basic precautions.

Read, follow, and understand all instructions and warnings before beginning any installation of this product. Failure to do so can result in electric shock, fire, or other injuries, including death. Save this user manual for instructions and warnings for possible future relocation and installation.



### **CAUTION:**

- This product is designed for dry/damp use.
- DO NOT use on radiant heated surfaces.
- DO NOT remove the lens protecting the LED.
- DO NOT open the product. It is NOT possible to change the LED lights or source.
- DO NOT use near a gas source.
- This product is not intended for use in possible explosive areas. It should never be in an area of exposure to vapor elements.
- This product is not a toy and should stay out of children's hands.
- When using the unit outside and to reduce the risk of fire or electric shock, safety precautions should always be followed.
- Always use GFCI protected circuits in wet or damp conditions.
- Keep all plugs and receptacles dry at all times.
- It is important to keep the unit at least 16 feet away from wet areas such as pools, spas, or standing water.
- Always use an outdoor-rated extension cord with a 3-prong ground plug with this product.
- Keep this product away from flammable materials such as drapes.
- NEVER move the unit by pulling the power cord.
- NEVER use the unit if there is damage or exposed bare wires. It is recommended to inspect the cords and connectors for wear or damage.
- ALWAYS make sure the light is on a leveled surface. Failure to do so can cause the unit to fall and break.
- ALWAYS plug the unit into a properly grounded circuit.

## ASSEMBLY INSTRUCTIONS: CL-TWL20K | 20,000LM DUAL HEAD LED WORK LIGHT WITH TRIPOD

### HARDWARE:

- A: Twin head work light with 6ft ground cord
- B: Support Bracket
- C: 69.29" Max height tripod with lights
- D: Hardware: 7-star knobs, 4-star knobs already installed on each light head
- E: Power Cord Attachment

### ASSEMBLY:

#### STEP 1:

Attach twin light head (A) on the support bracket (B) by using 2-star knobs (D).

#### STEP 2:

Loosen the locking knob on the tripod (C) and pull legs away from the center pole until all legs are fully extended. Re-tighten the locking knob firmly.

#### STEP 3:


Place the power cord attachment (E) on top of the tripod. Use 1-star knob (D) provided in the hardware packet to attach twin work light head and the support bracket onto the tripod (C).

#### STEP 4:

Extend the tripod from 3 to 5 feet. Unlock locking collars by twisting counterclockwise. Lift the pole up to desired height. Twist clockwise to re-lock the locking collar.

**NOTE: Do not overextend the tripod pole. If at any time product does not seem secure or sturdy, make sure that the tripod pole is not extended too far and the tripod base is fully extended to support the weight of the product.**

**NOTE: Make sure the portable light bar is connected completely to the locking tabs on the tripod stand. Lift the portable handle to confirm. Failure to complete this step may cause damage to the light and/or injury.**

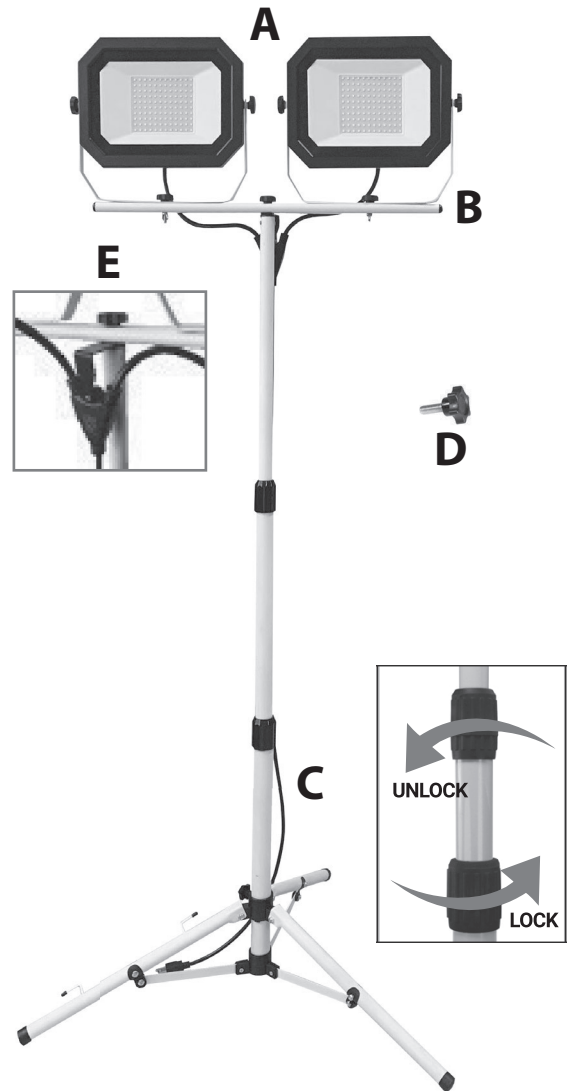

### EYES:



- **DO NOT look directly at the LED lights.**
- **DO NOT remove the LED lights protective covering.**



### CARE FOR YOUR PRODUCT:

This product has a **two-year warranty** from the date of purchase—this guarantees against failure due to factory defects, whether caused by materials or workmanship. The warranty is non-transferable and only pertains to the original purchaser. Proof of purchase is required for any repair or replacement, so please keep your proof of purchase receipt. This warranty does not cover normal wear and tear or damage due to misuse. Misuse of this product includes but is not limited to:

- Using outdoors in extreme weather conditions.
- Opening the product's housing.
- Any attempts to update, remodel or fix the unit yourself.

**If you have questions or missing parts, please contact our customer care at 1-888-745-4837**