



Galv-Krom finish endplates

- Support for mounting ceiling fans and light fixtures between wood ceiling joists when joists are exposed
- Expands to fit ceiling joists on 12" to 16" centers or 16" to 24" centers
- May be used for dry wall or lath and plaster ceilings


New Work Ceiling Fan and Light Fixture Bar Hanger

Cat. No.	Type Box Included	Box Cubic Inch Capacity	Span for Joist Centers
56111CFB-DW	56111-CFB	6.0	12" to 16"
54151CFB-ADW	54151-CFB	15.8	16" to 24"
4070CFB-DW	4070-CFB	20.8	12" to 16"
4070CFB-ADW	4070-CFB	20.8	12" to 24"
CFB-DW	NONE	N/A	12" to 16"
CFB-ADW	NONE	N/A	12" to 24"


- Bar hangers sold assembled with Steel City® 56111-CFB, 54151-CFB and Union™ 4070-CFB and also individually
- Galv-Krom finish endplates easily identify hangers as meeting NEC and UL requirements for fan support
- Listed for ceiling (paddle) fans up to 35 lbs.
- Listed for fixtures up to 50 lbs.




54151-N



54151-NE
Adjustable ears
recessed 3/8"



54151-NL
"L" bracket flush
mounted



54151-NV
"V" bracket
recessed 1/2"

4" Octagon Boxes—continued


Cat. No.	Bar Hanger Number	Bar Lgth. (in.)	Offset For	Stud	Std. Pkg.	Wt. Per C
1 1/2" deep—with non-metallic sheathed cable clamps—15.8 cubic inch capacity						
54151-N	C-5	—	1—1/2"	—	2	1—1/2"
54151-NE	C-5	—	1—1/2"	—	2	1—1/2"
54151-NL	C-5	L	1—1/2"	—	2	1—1/2"
54151-NV	C-5	V	1—1/2"	—	2	1—1/2"

1 1/2" deep—for non-metallic sheathed cable—15.8 cubic inch capacity

54151-NF	6010-DW	10 1/2-18 1/2	Drywall	3/8"	25	113
54151-NO	6010-ADW	14 1/2-26 1/2	Plaster	3/8"	25	118
54151-NG	6011-DW	10 1/2-18 1/2	Drywall	Fastener	25	113
54151-NP	6011-ADW	14 1/2-26 1/2	Plaster	Fastener	25	122


1 1/2" deep—for armored cable/metal clad—15.8 cubic inch capacity

54151-AF	6010-DW	10 1/2-18 1/2	Drywall	3/8"	25	105
----------	---------	---------------	---------	------	----	-----

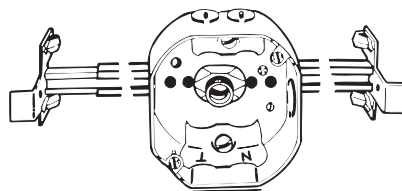

54151-N octagon box mounted on adjustable bar hanger.

50 lb. load max rating

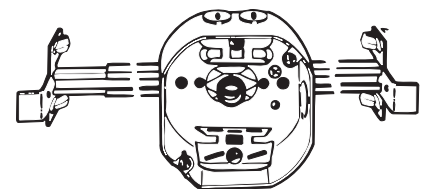

54151-A octagon box mounted on adjustable bar hanger

50 lb. load max rating