
Installation & User Manual

Bidet Attachment for Toilet

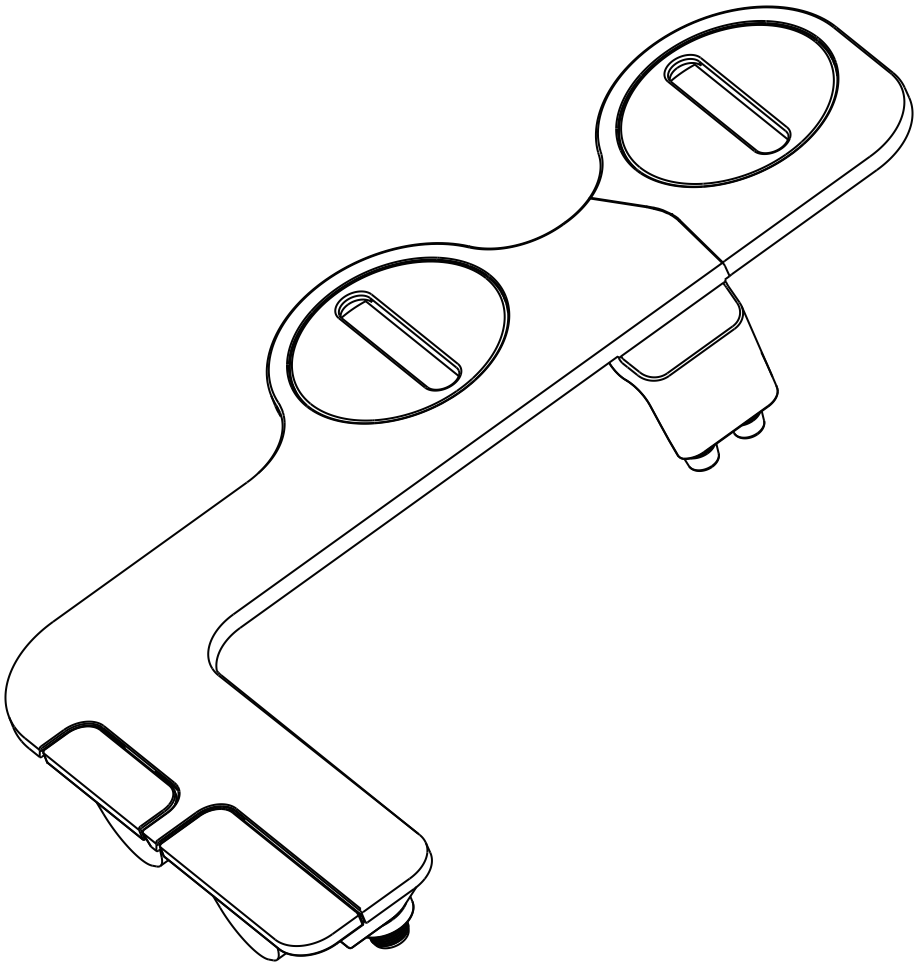

General instructions, appearance is for reference only,
please refer to the actual product received.

Contents

Names and Functions of Accessories **1**

Installation **2**

Preparation 2

Installation 2

Bidet Assembling and Installation on Toilet **2**

Final Assembled Figure **3**

Trying for the First Time 3


Trouble Shooting 3

- Thank You for Choosing Our Product. Please read the instructions carefully before installation and keep it available for future maintenance or reference.
- We are not responsible for the accidents resulting from the user's negligence.
- We reserve the right to make revisions to this manual without notice.

⚠	**Warning** Please place all the products at room temperature and do not storage the bidets and its accessories in the freezing temperature enviorments under 0 degree celcius !

NAMES AND FUNCTIONS OF ACCESSORIES

1. Accessories

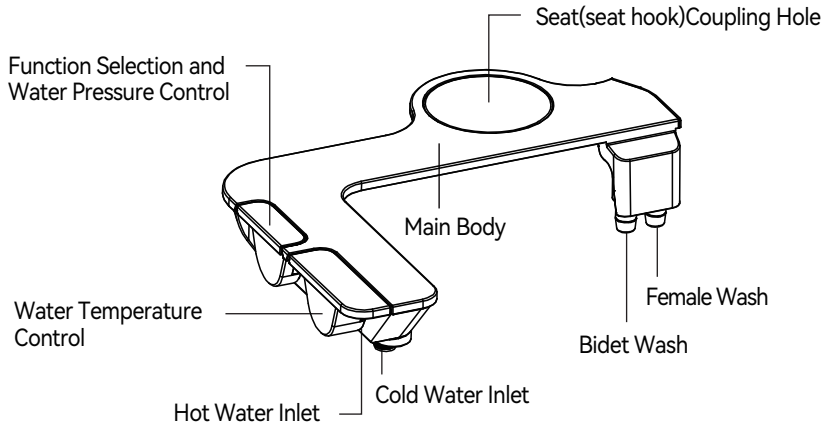



Non-slip Mat (2 pc)	Circular Mounting Brackets (2 pc)	Seat Hook (1 pc)	Adapter (2 pc)	Flexible Hose (1 pc) (Cold)	Flexible Hose (1 pc) (Hot))

2. Installation Tools Needed (Not included)



Wrench	Teflon Tape	Screwdrver (flat)


INSTALLATION

Preparation


① Remove the existing toilet seat.
② Turn off the water valve.
③ Flush toilet to drain tank completely.
④ Take out exiting water pipe.

Installation (please choose a suitable installation)

① **Hot Water**

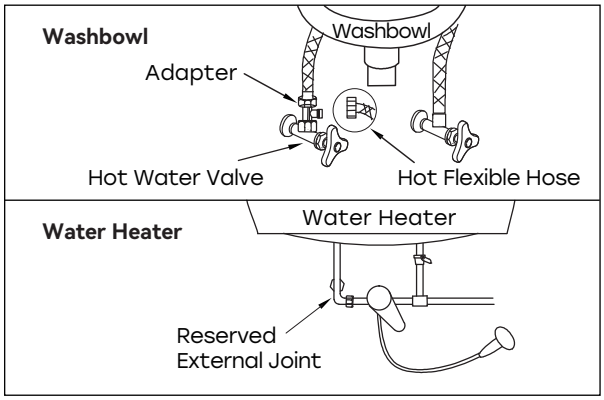

② **Cold Water**

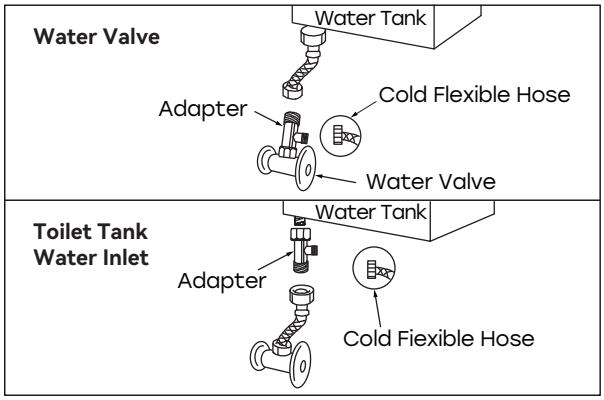

BIDET ASSEMBLING AND INSTALLATION ON TOILET

① Install seat hook into bidet.

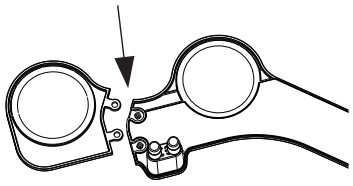


FIG 1

② Install rubber non-slip mats on the bottom of bidet.

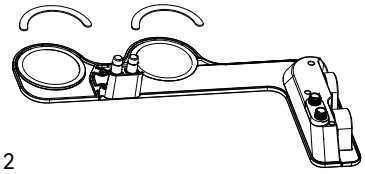


FIG 2

③ Place the circular mounting brackets into the bidet attachment and adjust it in suitable possition: The nozzle in the middle position, close to the toilet bowl part, pull it up and down to confirm it will not stucked by toilet bowl.





FIG 3

FINAL ASSEMBLED FIGURE

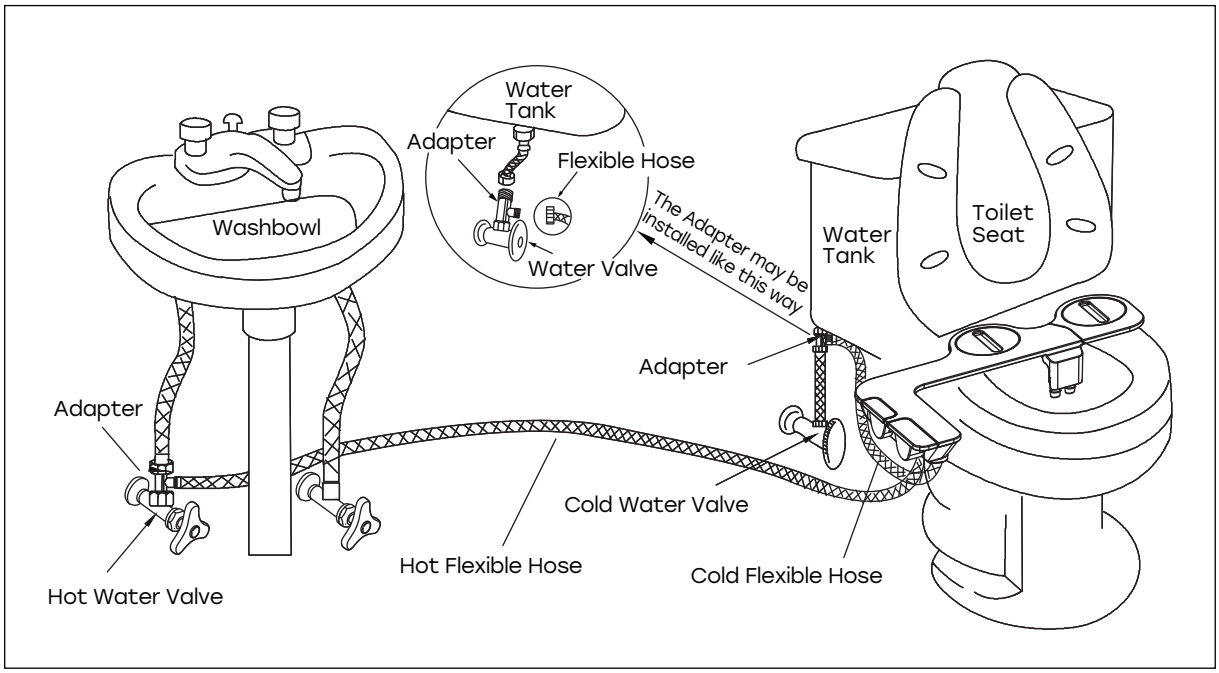


Trying for the first time

① Congratulations! You are ready to use for the first time.Adjust the function selection and water pressure control knob.Choose the comfortable pressure you want.

② Note: function selection and water pressure control knob couldn't reset automatically, please turn it off manually.

Trouble shooting

Twin Nozzle System



If your spray outlet hole is clogged for some reason, simply try to move spray outlet up and down for a few times manually.

Helpful tip

Over tightening can cause damage to the threads and result in water leakage.
Use only hand pressure first and check for any leakage.Turn only less than quarter turn at a time making sure there is no leakage !