



S3591BTRM
Shower Trim

Location:

Specification Submittal

Model Numbers

- 3591BTRM**
Tub/Shower System Trim
- Valve Options:**
-S261 Series Temptrol Shower Valve used with TRM modifiers
-S161 Series Temptrol Shower valve requires TC modifier

Options/Modifications

- 15**  1.5 gpm (5.7 L/min) flow restrictor
- 175** 1.75 gpm (6.62 L/min) flow restrictor
- L1** Less showerhead
- L7** Less handle
- TC** Test Cap Trim (includes TA-10&T-12A) *used with S161 series Temptrol Shower Valve*
- STN** Satin Nickel finish
- BBZ** Brushed Bronze finish
- MB** Matte Black finish

Feature Highlights

- Dia Shower Trim.
- Requires Temptrol® Pressure Balancing Shower Valve.
- Integral volume control.
- Metal lever handle.
- 7 mode showerhead.
- 2.0 gpm (7.6 L/min) flow restrictor.
- Components shall be metal and nonmetal construction, plated in standard polished chrome finish.

Compliance

- ASME A112.18.1/CSA B125.1
- WaterSense 1.5 gpm (5.7 L/min) 1.75 (6.6 L/min) 2.0 gpm (7.6 L/min)
- Lever meets ADA requirements for operations



Warranty

Limited Lifetime - to the original end purchaser in consumer/residential installations.
10 Years - for commercial/industrial installations. Refer to www.symmons.com/warranty for complete warranty information.



SKU Builder


Series	Finish	Modifier	Flow Rate	TRM (required)	TC	Final SKU
S3591B	STN		15	TRM		S3591BSTN15TRM
S3591	MB	L1		TRM	TC	S3591MBL1TRMTC

Note: No more than two modifiers (L1-L7) and modifier order will follow numerical order.

Architectural/ Engineering Specification

Symmons _____ Includes Dia shower trim powered by the Temptrol Pressure Balancing Valve. Includes integral volume control, metal level handle, 7 mode showerhead, and standard 2.0 gpm (7.6 L/min) flow restrictor. Components shall be metal and nonmetal construction, plated in standard polished chrome finish. 10 Year commercial Warranty. ASME A112.18.1/CSA B125.1, WaterSense 1.5 gpm (5.7 L/min) 1.75 gpm (6.6 L/min) 2.0 gpm (7.6 L/min) complaint. Lever handle meets ADA requirements for operation. Available options include: "15 - 1.5 gpm (5.7 L/min) flow restrictor", "175 - 1.75 gpm (6.62 L/min) flow restrictor", "L1 - Less showerhead", "L7 - Less handle", "STN - Satin Nickel finish", "MB - Matte Black finish", "BBZ - Brushed Bronze finish", and "TC - Test Cap Trim".

Dimensions

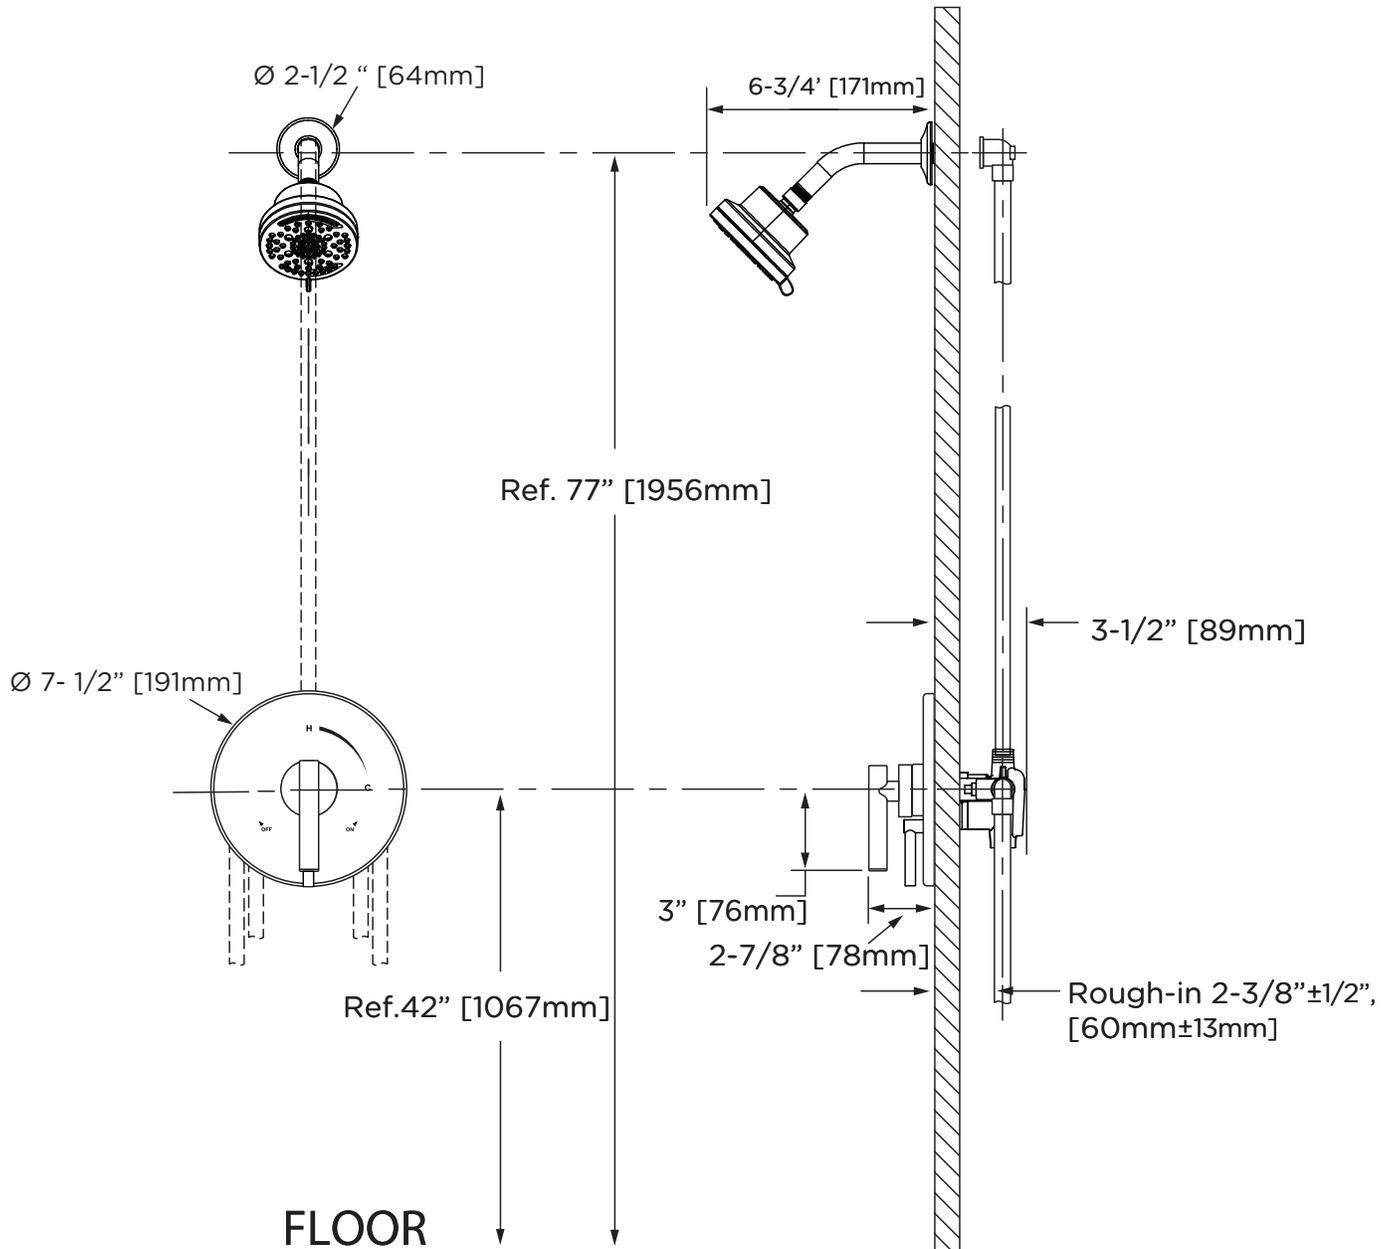

Notes:

- 1) Valve body and piping not included and shown as reference only.
- 2) Plaster shield (p/n T-176) from dry wall, plaster or other type walls 1/2" or greater.
- 3) All dimensions measured from nominal rough-in.
- 4) Dimensions are subject to change without notice.