


Installation Guide

For Style ABR1512AB, ABR1512C and ABR1512MBK

Tools Required



Light Source





1BULB REQUIRED BULBNOTINCLUDED

Fixture Height Adjustable17.25" to 63.75"

$oldsymbol{\Delta}$ Warnings and Cautions

Turn off the electricity at the circuit breaker before installation. Consult a licensed electrician if in doubt about installation.

Turn off power to the fixture and allow the bulbs to cool before replacing.


Package Contents

Preparation: Identify and inspect all parts before beginning the installation.

Missing or damaged parts? Contact your original place of purchase.

PARTS BAG







Outlet Box Screw




C Wire Connector



Fixture Chain

F Ceiling Canopy x 1

Fixture Body G



Shade Н


Table of **Contents**

Crossbar Assembly





Wiring





Ceiling Canopy





Shade and Bulb

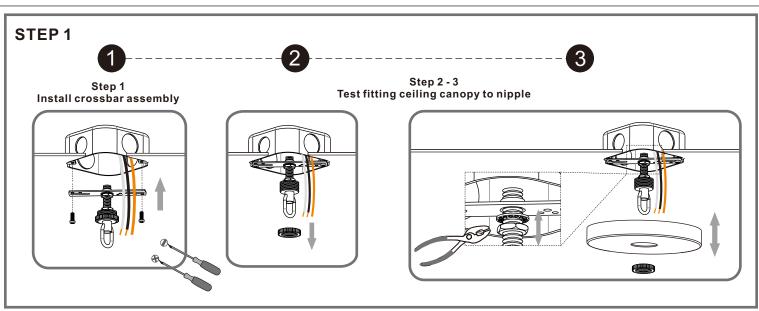


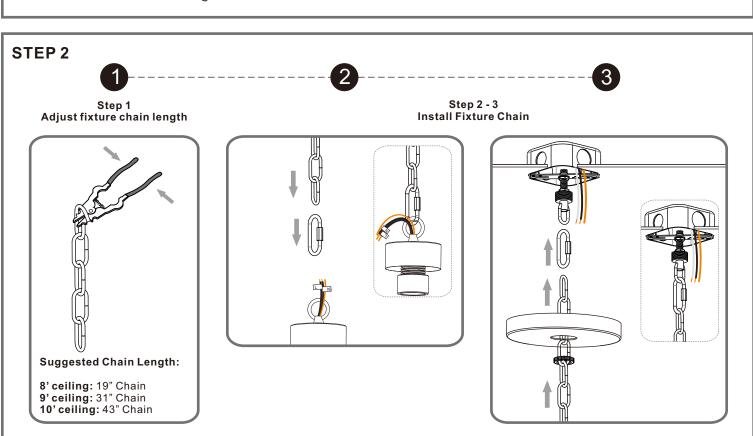





Step 1 Feed the fixture wires through the loop

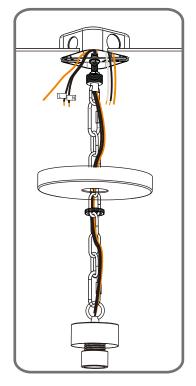



White wire (neutral) = from outlet box


Black or Red wire (hot) from outlet box



Supply wire from fixture ribbed side or identified with the Label "N"

supply wire from fixture smooth side or identified with the label "L"


Bare or Green ground wire from outlet box




Ground wire from Fixture


*Green Ground Screw on crossbar optional


STEP 4














©2020 QuoizelInc.

visit us on-line at www.quoizel.com