

Underlayment for floating vinyl, LVT, laminate, engineered and parquet floors

Environmentally-friendly insulation system
made from **natural** wood fibres



| 4 in 1 Underlayment

Excellent impact sound insulation and improvement of the acoustics with Delta IIC 25.



Protects the click-lock system of laminate, engineered and parquet floors with High compression strength of 21.32 PSI

Compensates on floor unevenness up to 1 mm

Flood protectant due to high liquid absorption ability of up to 20% of it's weight!

FEATURES

- High compressive strength of up to 21.32 psi that Protects the click-lock system of laminate and engineered floors.
- Excellent airborne and impact sound insulation with ΔIIC 25 (The dB rating difference between a floor measured with an underlayment and with no underlayment).
- STEICO/Germany. Made in Europe!
- 100% natural product. No carcinogenic emissions, Sum SVOC: 0 mg/m³, produced without adhesives containing formaldehyde.
- Improvement of the acoustics.
- Compensates on small floor unevenness of up to 1mm.
- Water vapor open.
- Quick and easy to install.
- Ideal for use with underfloor radiant heating systems.
- Ecologically and environmentally friendly.
- Recyclable.
- Available in sheets of 3x2', 15 sheets per pack.
- Wood fiber insulation board produced in accordance with EN 13986 and EN 622-4 and with ongoing quality supervision.
- The wood comes from sustainably cultivated forests and is certified independently according to the guidelines of the FSC® (Forest Stewardship Council®).

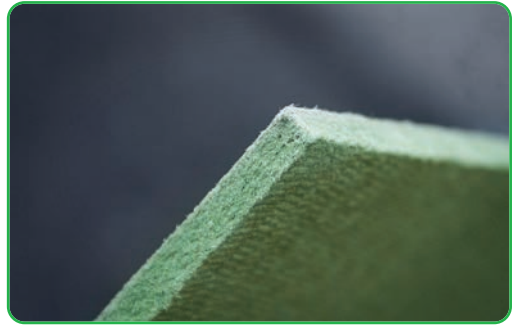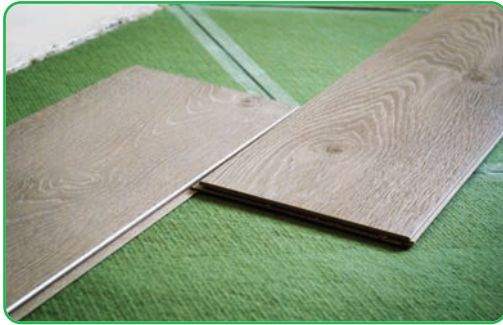

Mitglied der
DGNB
Deutsche Gesellschaft für nachhaltiges Bauen
German Sustainable Building Council



Das Zeichen für
verantwortungsvolle
Waldwirtschaft



Förderung nachhaltiger
Waldwirtschaft
www.pefc.de



Herstellwerk
zertifiziert gem.
ISO 9001:2008



I Technical values according to CEN/TC 16354

		3 mm (1/8")	6 mm (1/4")
Acoustical performance test report	IIC	65	---
ASTM E 90, ASTM E 492, ASTM E 2179.	STC	62	---
Specimen Type: 152 mm (6") ConcreteSlab with Drop Ceiling	Delta IIC	24	---
Acoustical performance test report	IIC	55	52
ASTM E 90, ASTM E 492, ASTM E 2179	STC	50	50
Specimen Type: 152 mm (6") ConcreteSlab WITHOUT Drop Ceiling	Delta IIC	25	25
Acoustical performance* test report	IIC	75	---
Specimen Type: 203 mm (8")	STC	73	---
ConcreteSlab with Drop Ceiling	Delta IIC	25	---
Protection against unevenness	PC	2.0 mm	4 mm
Compressive strength	CS	> 150 kPa	> 150 kPa
Compressive creep resistance	CC	> 50 kPa	> 50 kPa
Dynamic load resistance	DL25	> 150.000 cycles	> 150.000 cycles
Thermal resistance	R	0.043 m²K/W	0.090 m²K/W
Water vapour diffusion resistance	SD	0.02 m²K/W	0.03 m²K/W
Reaction to fire	RTF	E	E
Resistance to impact by large diameter ball	RLB	> 800 mm	> 850 mm
Fulfills minimum requirement of EPLF		yes	yes

I Packaging STEICO wood underlayment

Thickness (mm/inch)	Size (ft)	Weight\Pack (lbs)	Pieces\Pack	ft\Pack	Weight (kg/m2)
3.0 \ 1/8	2x3	18	15	90	0.77
6.0 \ 1/4	2x3	26	15	90	1.35

I Characteristic values STEICO wood underlayment

Produced and supervised according to	EN 13986
Porous wood fiber insulating board according to	EN 622-4
Board designation	EN 622-4 SB - E1
Edge design	Square edged
Thermal conductivity I [W/(m2*K)] accord. to EN 13986, Tab. 11 0.07	0.07
Bulk density r [kg / m3]	ca. 250
Water vapour diffusion resistance factor µ	5
Applied materials	wood fiber, aluminium sulphate, paraffin, dye
Waste code (EAK-Code)	030105 / 170201, Disposal as wood and wood-based material

* Calculated value. Based on the results of acoustic performance tests of 6" stabs and on the sound absorption and transmission of given materials in similar experiments. May vary upon specific features.

20 YEARS LIMITED MANUFACTURER WARRANTY.

STEICO warrants to the original purchaser only that STEICO underlayment shall be free of defects in materials and workmanship when installed and used in accordance with the applicable product documentation. STEICO underlayment meets or exceeds all underlayment standards set by the European Producers of Laminate Flooring (EPLF) and MMFA (Multilayer Modular Flooring Association), complies with International Building Code requirements. STEICO underlayment has not been tested with all Lowes flooring products.

In the event that a product failure is caused by a defect in materials or workmanship within the Applicable Warranty Period, STEICO agrees to replace, at its option and at no charge to the purchaser, any Product or part thereof that proves to have such a defect, provided that prompt written notice of any such defect is given to Sunco America LLC, its official STEICO distributor in the USA. STEICO's agreement to replace any product found to be defective in materials or workmanship is the exclusive remedy provided herein; this remedy shall not be deemed to have failed of its essential purpose so long as Steico is willing and able to replace any such defective Product or part or to refund the purchase price paid.

THIS MANUFACTURER WARRANTY APPLIES EXCLUSIVELY TO STEICO UNDERLAYMENT PRODUCTS AND DOES NOT EXTEND TO ANY OTHER FLOORING PRODUCTS SOLD IN LOWES.

STEICO MAKES NO OTHER WARRANTY, EXPRESSED OR IMPLIED. THERE IS NO WARRANTY OF MERCHANTABILITY OR OF FITNESS FOR A PARTICULAR PURPOSE. STEICO LIMITED WARRANTY CONTINUES ONLY FOR THE WARRANTY PERIOD SPECIFIED. NOTWITHSTANDING THE FAILURE OF ANY REMEDY PROVIDED HEREIN, IN NO EVENT SHALL ENTEGRIS BE LIABLE FOR CONSEQUENTIAL, INCIDENTAL, PUNITIVE, SPECIAL OR ANY OTHER INDIRECT DAMAGES RESULTING FROM ECONOMIC LOSS OR PROPERTY DAMAGE SUSTAINED BY ANY CUSTOMER FROM THE USE OF PRODUCTS.