

SOAKER BATH

GL95 Fuzion 7242 Soaker Bath

GP95 **Optional Wood Frame, Soaker**




WHIRLPOOL BATH

GL30 Fuzion 7242 Whirlpool bath,
Right Hand, with Chromatherapy lighting

GL40 Fuzion 7242 Whirlpool bath,
Right Hand, with Illumatherapy™ jet lighting

GU05 **Optional Wood Frame, Whirlpool**

- Center Drain Locations
- Overflow fitting comes with tub
- Accessories / Hardware:
 - TheraPro Jet Trim Kit: #D095
 - Oval Trim Kit: #N557
 - AccuPro Jet trim Kit: # P556 (4 kits required)
 - Optional wood frame in Teak or Wenge finish #GU07
- Trim Kit Finishes Available:
 - (827) – Chrome
 - (898) – Brushed Chrome
 - (815) – Satin Nickel
 - (829) – Bright Brass
 - (805) – Platinum
 - (826) – Brushed Nickel
 - (845) – Oil Rubbed Bronze

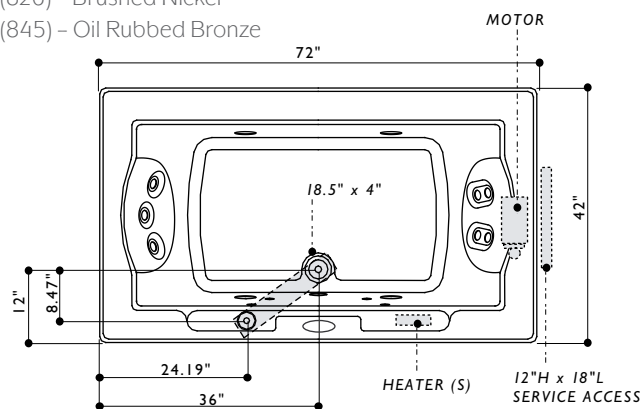

Product Shown: GL30

* Measurements inside unit represent cutout in floor to allow for drain/overflow.

Minimum Service Access dimensions given.

INSTALLATION NOTES

Refer to installation instructions included with fixture before beginning installation. Please confirm product availability and specifications before commencing with any installation work.

PRODUCT SPECIFICATIONS AND AVAILABILITY ARE SUBJECT TO CHANGE WITHOUT NOTICE.

Technical Specifications

DIMENSIONS

72"L x 42" W x 24" H
(1829mmL x 1077mmW x 610mmH)

DRAIN LOCATION

Center

CUTOUT

Undermount: GR23000
Drop-In: 71x41

TOTAL WEIGHT

1335 lb / 606 kg (models GL30/GL40)
1315 lb / 596 kg (model GL95)

OPERATING GALLONAGE

108 U.S. Gal Max / 80 U.S. Gal Min
409 Liters / 303 Liters

PRODUCT WEIGHT

135 lb / 61 kg (models GL30/GL40)
115 lb / 52 kg (model GL95)

SKIRT MOUNTING

Not Available

ELECTRICAL SPECIFICATIONS (models GL30/GL40)


All require a dedicated GFCI protected separate circuit(s).

Motor/Pump: 120 VAC, 20 AMP, 60 Hz
RapidHeat™: 120 VAC, 15 AMP, 60 Hz


HEATER (models GL30/GL40)

S750000 (Standard)
Dedicated GFCI Circuit

SIDE VIEW

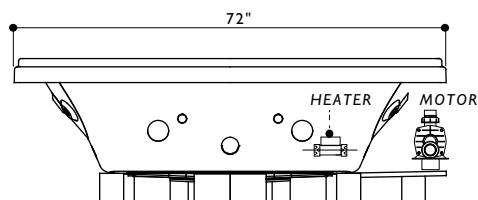

END VIEW

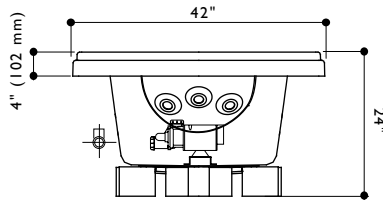

DRAIN / OVERFLOW

