

# ECL5 LED Combo Exit Sign & Emergency Light

The NICOR ECL5 combo exit and emergency provides a code compliant solution for outdoor and wet location requirements. The UL924 Wet Location listed fixture is made from an ABS corrosionresistant enclosure, making it a durable option. The ECL5's emergency LED heads offer high output and adjustable LED heads to deliver direct illumination for path of egress. The evenly illuminated exit sign is available with red or green stencils. The maintenance free nickel-cadmium battery provides 90 minutes of back up power. The ECL5 Series offers flexible installation for surface wall or end mount options along with field removable chevrons for universal configuration based on your application's directional needs.

### Construction

- Injection molded thermoplastic ABS housing, UL-94-V-0 rated material
- Injection molded clear polycarbonate face

### Electrical

- Operating temperature rating of 5°F to 104°F (-15°C to 40°C)
- Maintenance-free nickel-cadmium battery provides 90-minute emergency operation and recharges in 24 hours
- 120/277VAC Dual voltage operation, 60Hz input
- Fully-illuminated 6" letter height with 3/4" stroke
- Includes test switch/power indicator light

### Finish

- White textured thermoplastic housing
- Available with either red or green lettering

### Installation

- Surface wall or end mount installation options
- Universal mounting plate with EZ quick connect
- Field-installable, removable chevron directional indicators for all configurations
- Supplied with two faces for single or double face installation

### Compliance


- UL 924
- Listed for wet locations

### Warranty

- 1-year limited system warranty standard
- Warranty does not cover product failure due to an overvoltage event (power surge)



120° TILT WITH 360° ROTATION

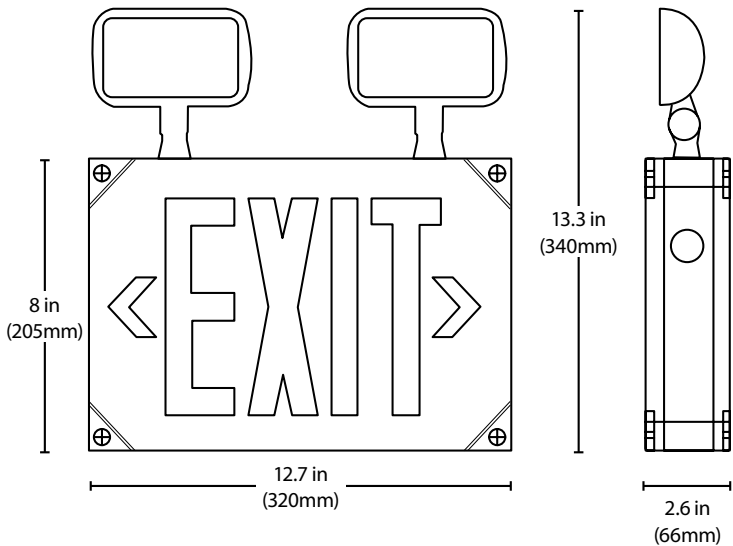

Product Information	
Input Voltage (VAC)	120/277
Power Draw (W)	Red Model: 2.9 W (120 VAC), 3.8 W (277 VAC) Green Model: 2.94 W (120 VAC), 3.5 W (277 VAC)
Emergency Operation	Minimum 90 Minutes



## Applications




The ECL series can be installed in many applications such as hospitals, event venues, conference spaces, and more.

## Installation



The ECL5 installs with a universal mounting plate with EZ quick connect, for a quick and easy installation.

The ECL5 has adjustable lamp heads with the exit sign available in green or red.

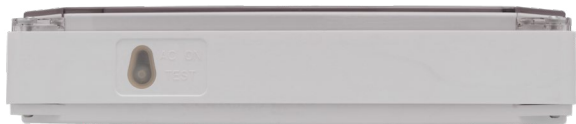

Ordering Information					
Series	Version	Voltage	Housing Color	Letter Color	Number of Faces
ECL5	1 (Version 1)	UNV (120/277VAC)	WH (White)	G (Green)	2 (Single and Double)
				R (Red)	