


INSTALLATION INSTRUCTIONS

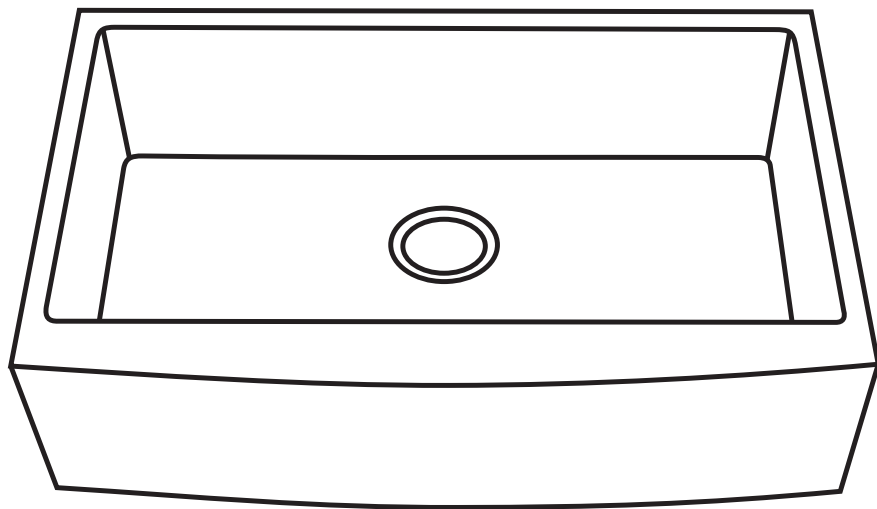

Farmhouse Kitchen Sink

IMPORTANT:

1. We strongly recommend that the product be installed by A licensed plumber.
2. We recommend at least two people to lift or mount the sink .

TOOLS


**Safety Glasses / Marker / Silicone Adhesive Sealant / Tape / Jigsaw /
Rags / Wood Braces / Leveling Device / Screws / Bladed Screwdriver**

NOTICE:

1. The cabinet must be installed,secured,plumb,and level before installing the sink.
2. It is recommended to provide the actual sink to the cabinet manufacturer before cabinet production.
3. Before installing sink,verify that the distance from the top of the doors to the top of the cabinet is greater than the apron front.
4. Double-check the cabinet opening dimensions. If necessary, adjustments can be made by adding filler strips or sanding the opening.
5. Correct installation requires a custom-made sink base cabinet and support frame.

Step1: Prepare the Countertop and Cabinet

- (1) Put the cutout template and mark the size on the countertop and cut the countertop.
- (2) Measure the height and depth of the apron sink to double-check the size and then cut the cabinet front.

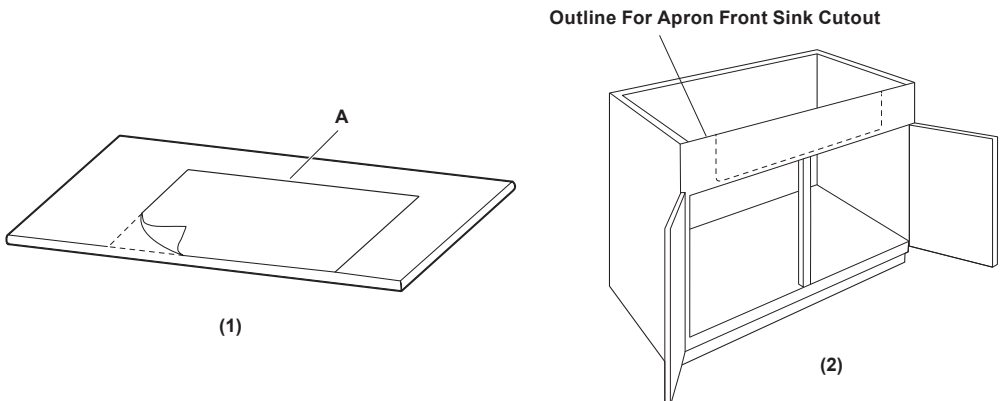


Step 2: Install the Wood Supports

Make proper frames under the countertop to support the farmhouse sink.

Prepare two supporting frames and fix them on right and left sides of the base.


Before that, please mark the location of the frames to ensure that the rim of the sink will sit at frames and slightly below the top edge of the cabinet.

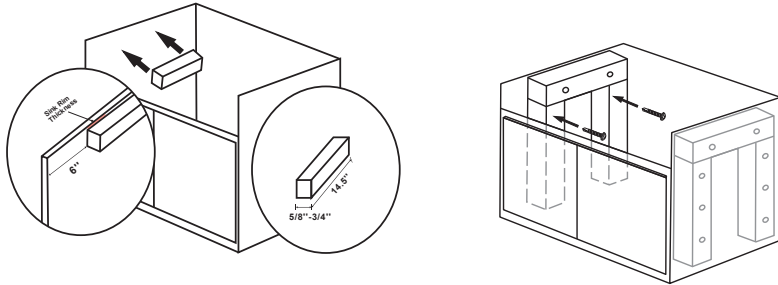

Tips: Provide appropriate clearance for faucet, water supply lines, drain assembly, garbage disposal and structural parts of the cabinet.


Step 3: Install the Sink

- (1) Lower the sink into the cabinet. Verify the sink is supported by the frame.
- (2) Verify the sink is level, make any adjustments and shim as needed.
- (3) Remove the sink. Apply a bead of sealant to the top of each support.
- (4) Lower the sink onto the supports and push in to ensure the apron is flush to the front of the cabinet.

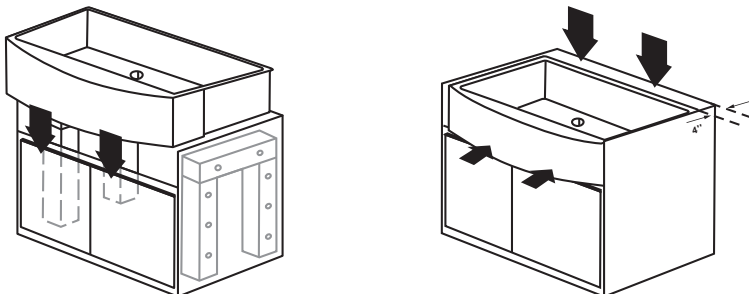


Step 4: Install the Countertop

- (1) Apply a thin bead of silicone sealant where the sink meets the countertop and cabinet.
- (2) Cover the countertop on the sink.

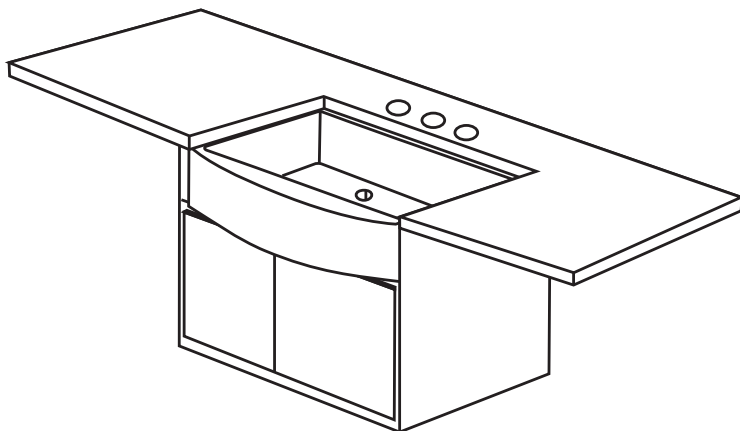



Step 5: Attach Mounting Hardware

Determine placement of clip brackets. Pre-drill holes according to method desired. Install the clips to the countertop, ensure each clip engages the rim. Tighten evenly.

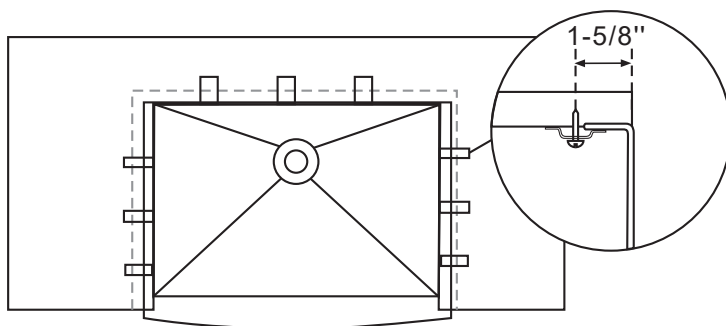

Step 6: Install Plumbing Fixtures

- (1) Connect the drain basket.
- (2) Follow the faucet and drain manufacturer's instructions, connect the P-trap, and water supply lines. (faucet not included)
- (3) Run water into sink and check for leaks.

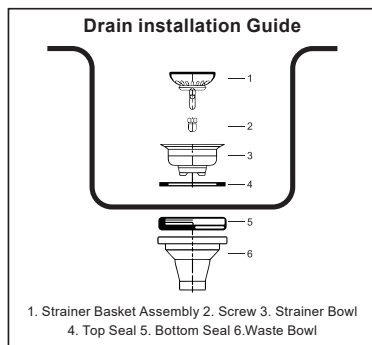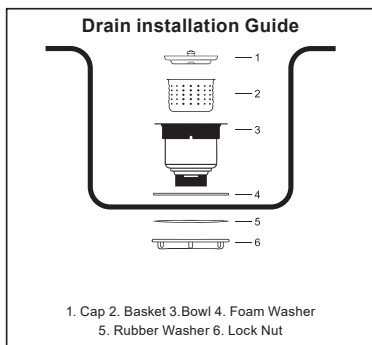

MAINTENANCE INSTRUCTIONS

Daily Cleaning:

1. Use a soft cloth and mild detergent.
 2. Dry the sink immediately after each use.
 3. Wipe the sink surface with a scouring pad following the grain of the surface.
-

Do Not:

1. Leave water, dishes, or stainless steel coolers in the sink for extended periods, as this may cause rust spots.
 2. Leave detergent or bleach in the sink for extended periods, as this may cause discoloration or damage to the surface.
 3. Using steel wool will leave scratches and damage the protective layer.
 4. Leaving rubber mats, cleaning pads, or sponges in the sink for extended periods will damage the surface.
 5. Do not cut vegetables in the sink.
 6. Hard water can also cause rust.
-

Q&A:

1. WHY IS MY NEW KITCHEN SINK RUSTING?

Reasons: Rust and stains on stainless steel sinks can be caused by a variety of factors, including:

- (1) Pots or other metal cookware left in the sink for several days.
 - (2) Cutlery or knives and forks left in the sink for several days.
 - (3) Metal containers (e.g., pet food containers, vegetable containers, etc.) left in the sink for several days.
 - (4) Iron in the water (Recommendation: Install an iron filter to mitigate this problem).
 - (5) Using certain detergents stored in metal bottles or with built-in soap dispensers.
 - (6) Wet sponges or colored towels left in the sink for several days.
-

PREVENTION AND TREATMENT:

- (1) Install the sink only after all new items are completed, and clean the sink immediately after installation.
- (2) Clean the sink after each use.
- (3) Rust / water stains / mildew can be removed using the following methods:

Baking soda + white vinegar / lemon juice Toothpaste (for minor stains, shallow scratches, and restoring shine) Special stainless steel cleaner

2. WHAT CAN SCRATCH OR DAMAGE THE SINK?

- (1) Improper packaging and accessory issues can cause scratches during transportation.
- (2) The sink is easily scratched by sharp objects; please clean the sink with a soft cloth.

PREVENTION AND TREATMENT METHODS:

- (1) Minor scratches: Wipe repeatedly with a sponge soaked in toothpaste.
- (2) Moderate scratches: Wipe a small area with a scouring pad.
- (3) Severe scratches: Purchase a stainless steel polisher.