

EATON'S COOPER LIGHTING - ALL-PRO™

DESCRIPTION

The ALL PRO Series emergency light (APLEL) is the ideal choice when an affordable unit is required for general purpose emergency applications. Its styling and designer finish enables it to blend with any decor. The housing and mounting plate employ snap-fit construction to reduce the installation time. Both emergency lighting heads have long life LED's and are fully adjustable, insuring maximum flexibility.

SPECIFICATION FEATURES

Electrical

- Dual Voltage Input 120/277 VAC, 60Hz
- Line-latching
- Brownout circuit
- Low Voltage Disconnect
- Overload/Short Circuit Protection
- Test Switch / Power connector facilitates installation
- 3.6V, .78W DC long Lasting LED Heads

Housing Construction

- All components are injection molded, color stable, high impact thermoplastic material
- Designer white textured finish standard
- Components are of snap-fit construction to facilitate under 5-minute installation

- Reinforcing ribs throughout to provide maximum strength
- Suitable for wall or ceiling mount applications
- Universal J-box mounting pattern
- Keyhole mounting slots
- Aesthetically designed with a thin profile

Battery

- Sealed Nickel Cadmium
- Maintenance Free, Long Life
- Full Recharge Time: 24 hrs (max.)

Code Compliance

- UL 924 Listed
- Damp Location
- Life Safety NFPA 101
- NEC/OSHA
- Most State and Local Codes
- Operating temperature range 10C to 40C

Lamp Data

- Long Life LED Emergency Heads
- Fully adjustable

Warranty

- Five-year warranty



APLEL

POLYCARBONATE
HOUSING


LED SOURCE

LOW PROFILE

SEALED NICKEL
CADMIUM BATTERY

EMERGENCY LIGHTING

DIMENSION

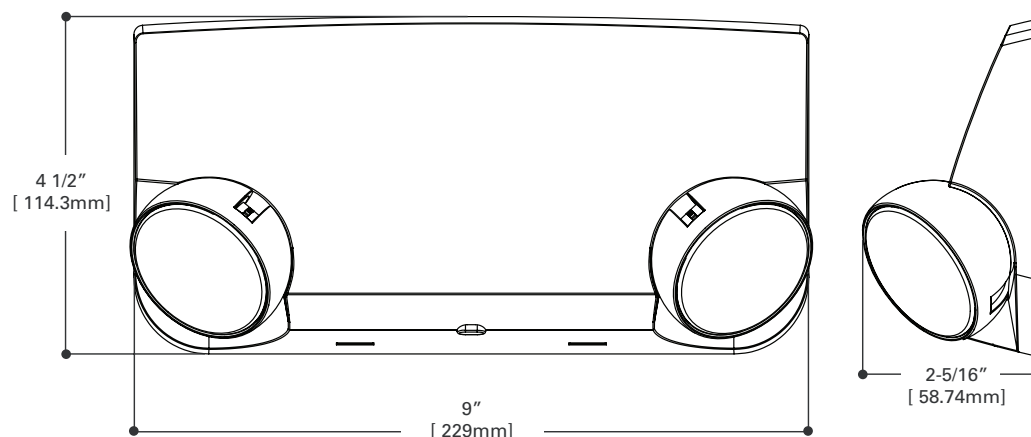

For complete product data, reference the Fluorescent Specification binder. Specifications & dimensions subject to change without notice. Consult your Eaton's Cooper Lighting Representative for availability and ordering information.

Cooper Lighting
by **EATON**

Visit our web site at www.eaton.com/lighting
Customer First Center 1121 Highway 74 South Peachtree City, GA 30269 770.486.4800 FAX 770.486.4801 2/15 PS502004EN