PATIO DINING CHAIR



We highly value customer's user experience. Please contact us freely if there's any parts missing or damaged. We will provide professional advice or efficient customer support in 24 hours.


PARTS LIST

TOOLS REQUIRED




ALLEN WRENCH (PROVIDED)

ASSEMBLY REQUIREMENT

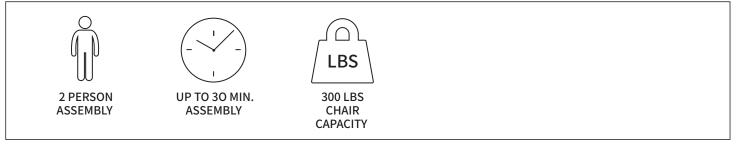

PARTS LIST

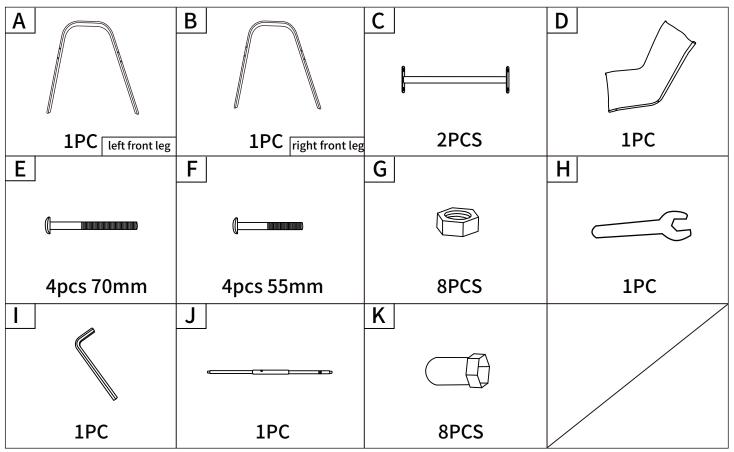

★ Fasten screws loosely during initial assembly. Do not firmly tighten screws until the step 8.

Before Assembly




Tips: We have labeled the legs to indicate which side is the front side.However, the factory sometimes mislabeled them, please check with the picture before installing, the straighter side should be the front side.

ATTENTION




- When installing, we suggest you can assemble the product on the flat carton which come with the product, or any other clean floor to avoid the product surface being scratched.
- Please do not dispose of the original product box until you confirm you received the complete and correct item.
- If you want to return the product, you are suggested to contact our after-sale service first. You need to pack the returned product with the original box and then follow the steps to return it.

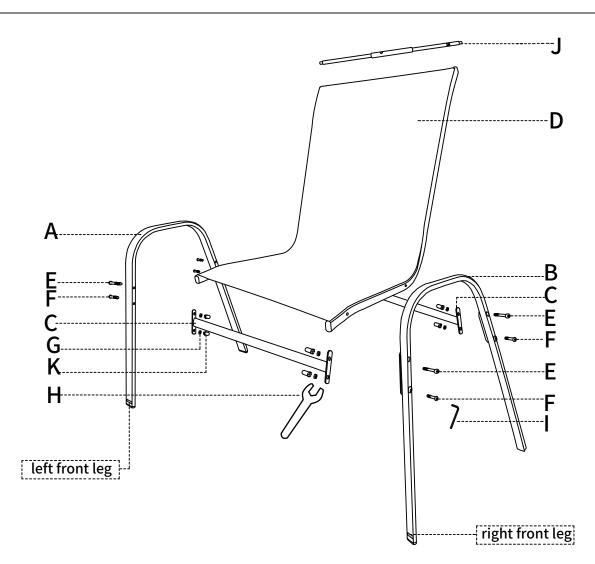

Assembly Instructions


Step 1: Attach the right side of support beam (C) to the Right Leg (B) first. Use screws (F), nuts (G) and parts (K) to connect them.

Note! There are 2 holes on the supprot beam (C), you just need to connect the bottom hole of the (C) first.

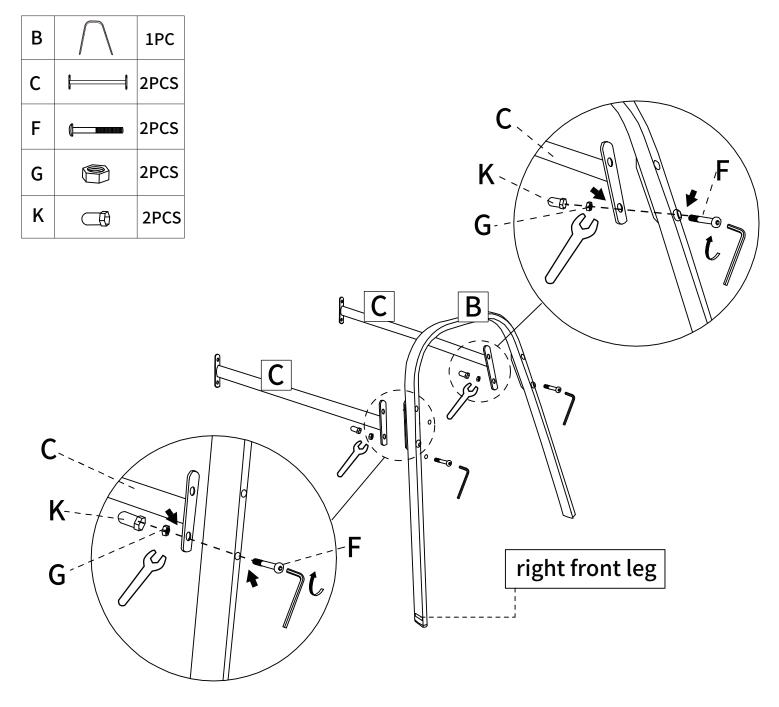

Step 2: After attch the right side of 2 support beams (C) to Right Leg (B), please attach the left side of 2 support beams (C) to Left Leg (A).Use screws (F), nuts (G), parts (K) to connect them.


Note! There are 2 holes on the supprot beam (C), you just need to connect the bottom hole of the (C) first.

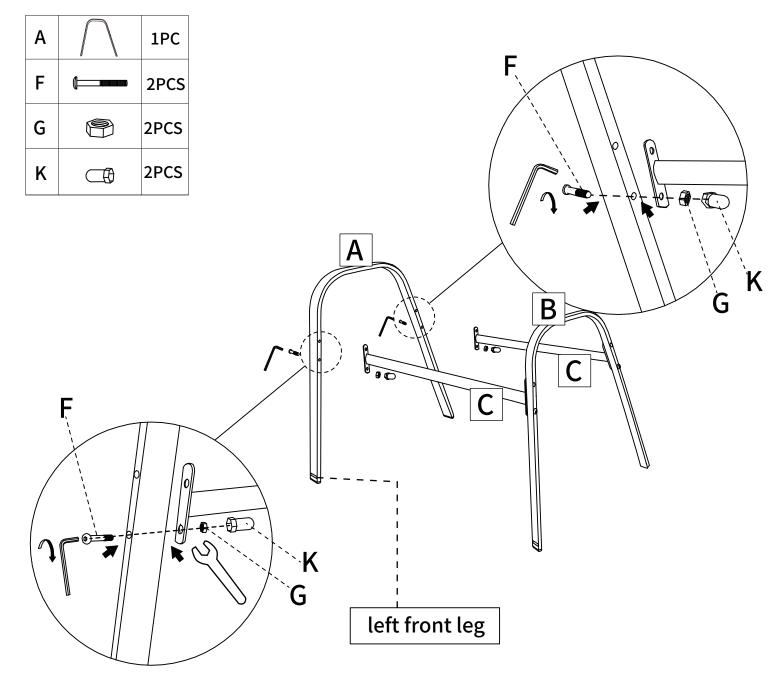


Step 3: Unfold Part (D) and make it at the correct direction before install it to the chair frame.

Note! If the Part (D) is correctly unfolded, you will only see two holes on the side of the Part (D).

Please check it before installing.

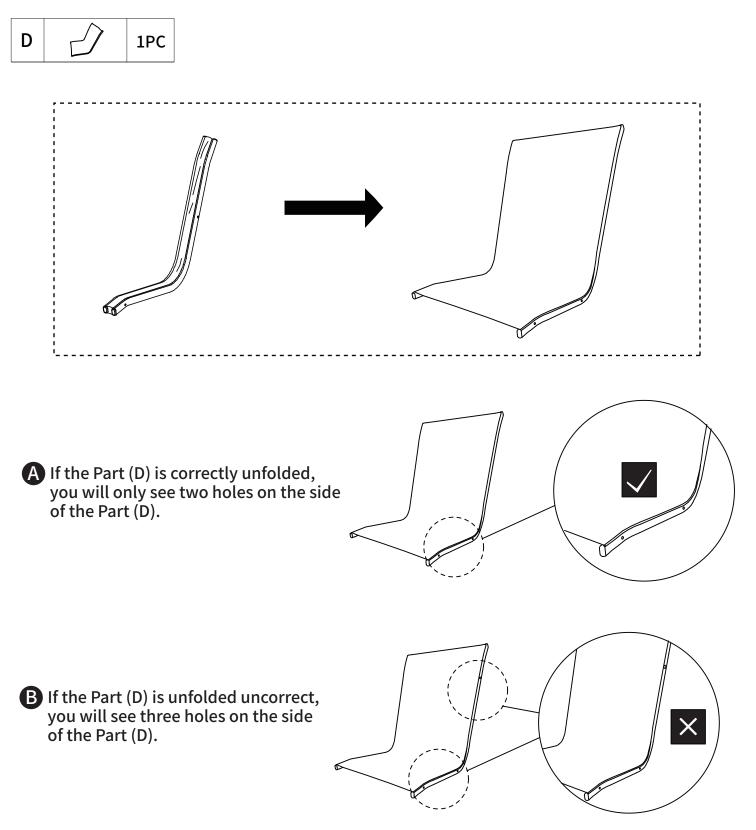


Step 4:Make sure you place the the part (D) on the chair frame at the correct direction. Align the holes of part (D) to the top holes of the support beam (C).

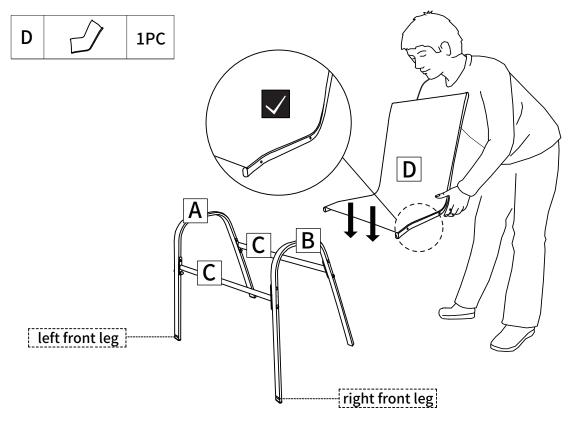


Step 5: Use screws (E) and nuts (G) and parts (K) to connect part (D) to the metal frame.After this step,you can tighten each screw.

Note! There are 2 holes on the supprot beam (C), you just need to connect the top hole of the supprot beam (C) first.

-6-

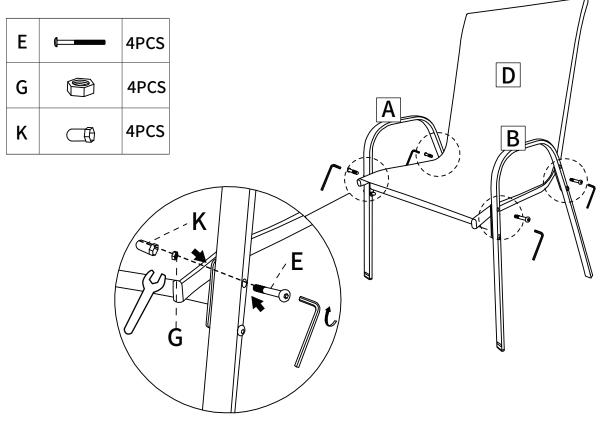


Step 6: First insert the left side of Part (J) into the Part (D). Then insert the right side of Part (J) into the Part (D).

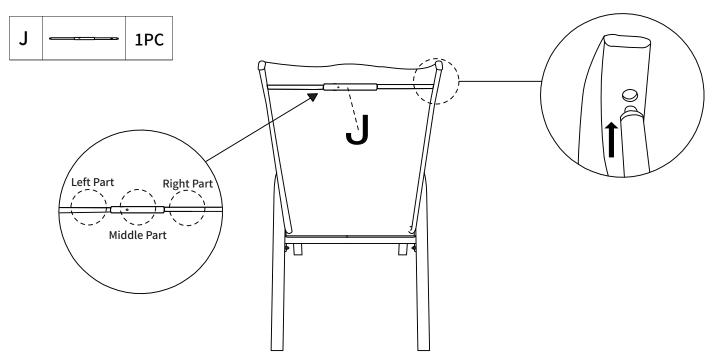

Step 7: Hold the middle part of the Part (J) and rotate the right part of it by clockwise until the seat back is fully extended.

Note! You don't need to rotate Part (J) to the end, you can stop when the seat back is flat.

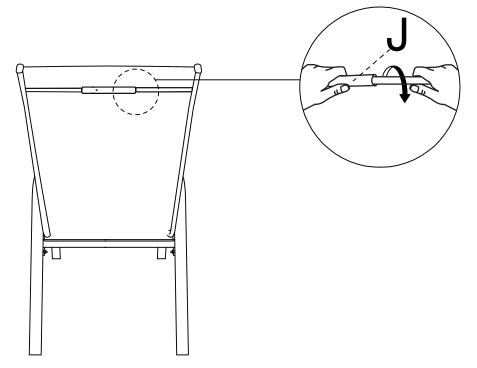

Step 8: Tighten all the screws and nuts.



CUSTOMER SERVICE FAQS

Q: The chair is unstable and wobbly after installation.

A:If you find that the chair is unstable and wobbly after installation, please review steps 1 and 2 of the installation.

Q: Some parts are missing, I could not finish assembly.

A: Please kindly circle missing parts in the parts list of the manual, and send pictures to our service team. We will prepare and ship them to you for free ASAP.

Q: My item occurs a quality problem. I am not satisfied with it.

A: Please kindly take it easy and provide us pictures. We would help you to solve it by send replacement parts, replacement products or refund. And you do not need to take time to repack and return it back to us.

Q: The color is not the same as I ordered. How to solve it?

A: Please kindly help to provide us the pictures of the SKU number, the shipping label on the carton and also the product itself, better in one picture. Your pictures will help us to speed up solving the problem.

Q: How to prolong the service life of this item?

A: When it is stained with dusts, oil or sweat, please wipe with a damp cloth. You'd better use a cover when it is out of use.