

# Features

- Includes face plate with handle, shower arm with flange.
- Single handle controls both on/off activation and temperature setting.
- Supplied with ADA compliant metal lever handle.
- For use with any KOHLER showerhead (not supplied).
- Complements the Bancroft<sup>®</sup> faucet and accessory collections.

# Material

- Premium material construction with metal handle ensures reliability and durability.
- KOHLER finishes resist corrosion and tarnishing, exceeding industry durability standards.

# Installation

• Trim set requires valve to complete installation.

# **Required Accessories**

K-304/K-P304 Series Rite-Temp® Valves

or

K-8304/K-P8304 Series Rite-Temp $\ensuremath{\mathbb{R}}$  Valve & Cartridge Kits or

K-8300/K-P8300 Series Rite-Temp® Valve Body Rough-ins K-8305/K-P8305 Series Rite-Temp® Cartridges

#### or

K-2971-KS 3/4" Pressure-balancing Valve

### **Optional Accessories**

K-10350 Deep Rough-In Kit For K-8305 Cartridges K-10351 Test Cap For K-8300 Series Valve Bodies





ADA CSA B651

### **Codes/Standards**

ASME A112.18.1/CSA B125.1 ADA ICC/ANSI A117.1 CSA B651

# KOHLER<sup>®</sup> Faucet Lifetime Limited Warranty

See website for detailed warranty information.

# **Available Color/Finishes**

Color tiles intended for reference only.

### Color Code Description

| CP | Polished Chrome          |
|----|--------------------------|
| SN | Vibrant® Polished Nickel |
| BN | Vibrant® Brushed Nickel  |
| BV | Vibrant® Brushed Bronze  |

- BV Vibrant® Brushed Bronze
- 2BZ Oil-Rubbed Bronze




# **Bancroft**®

Rite-Temp<sup>®</sup> Shower Valve Trim K-TLS10583-4

# KOHLER. Faucets

# Bancroft® Rite-Temp® Shower Valve Trim K-TLS10583-4

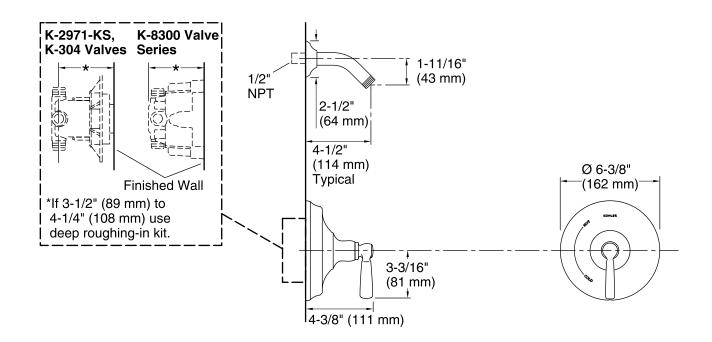

# **Technical Information**

All product dimensions are nominal.

### Notes

Install the product according to the installation guide.

NOTICE: Risk of product damage. Long screws for installing trim can damage the K-2971-KS valve. Consult the trim installation guide to verify if the thin wall installation kit (88526) is needed.

ADA, CSA B651 compliant when installed to the specific requirements of these regulations.

