

styleselections®

Style Selections® is a registered trademark of LF, LLC. All rights reserved.


ITEM #0298969

HOTEL SHELF

MODEL #9005SSMV

Français p. 6

Español p. 11

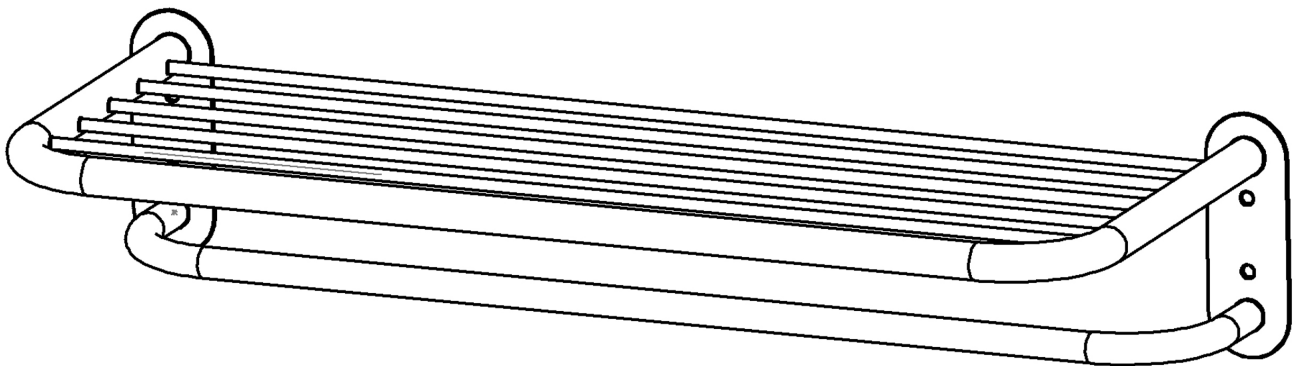



ATTACH YOUR RECEIPT HERE

Serial Number _____ Purchase Date _____



Questions, problems, missing parts? Before returning to your retailer, call our customer service department at 1-877-888-8225, 8 a.m. - 8 p.m., EST, Monday - Friday.


PACKAGE CONTENTS

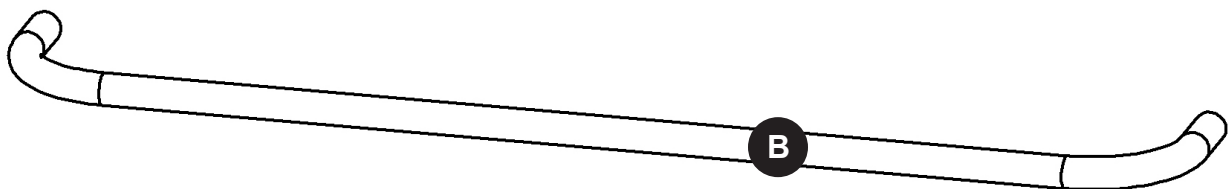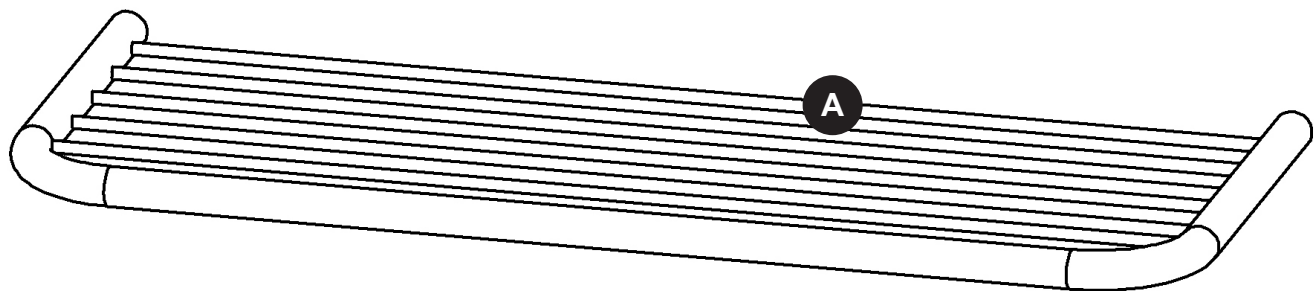

PART	DESCRIPTION	QUANTITY
A	Shelf	1
B	Towel Bar	1

HARDWARE CONTENTS (shown actual size)


AA



Hex-Head
Screw

Qty. 4


BB

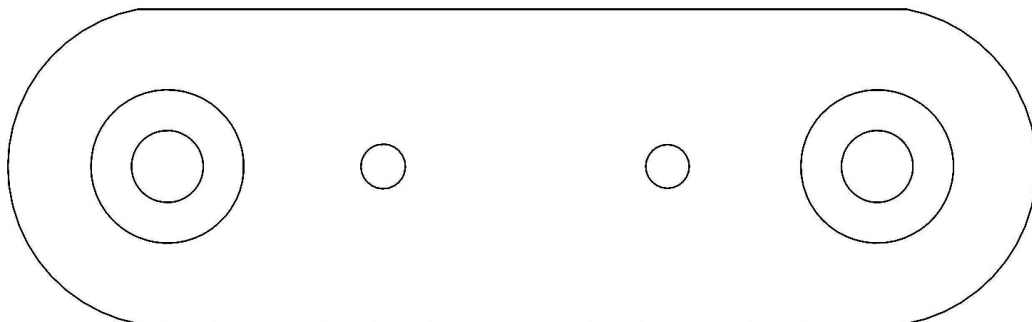

Mounting
Bracket

Qty. 2


CC



Wall
Anchor

Qty. 4


DD



Mounting
Screw

Qty. 4

EE

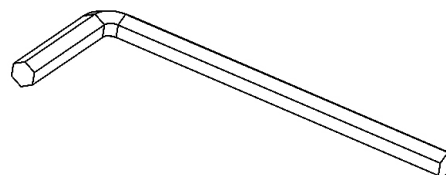

Hex
Wrench

Qty. 1



SAFETY INFORMATION

Please read and understand this entire manual before attempting to assemble, operate or install the product.

- Before cutting, drilling or hammering into any wall surface, verify the location of electrical, plumbing and gas lines. Cutting any of these may cause serious injury. If needed, contact your electrician, plumber or service person.

PREPARATION

Before beginning assembly of product, make sure all parts are present. Compare parts with package contents list and hardware contents list. If any part is missing or damaged, do not attempt to assemble the product.

Estimated Assembly Time: 15 minutes


Tools Required for Assembly (not included): Phillips Screwdriver, Hammer and Level

ASSEMBLY INSTRUCTIONS


1. Fasten mounting brackets (BB) to shelf (A) and towel bar (B) with hex-head screws (AA).

NOTE: Drain holes located on towel bar (B) should be on the bottom.

Hardware Used

AA Hex-Head Screw  x 4

BB Mounting Bracket  x 2

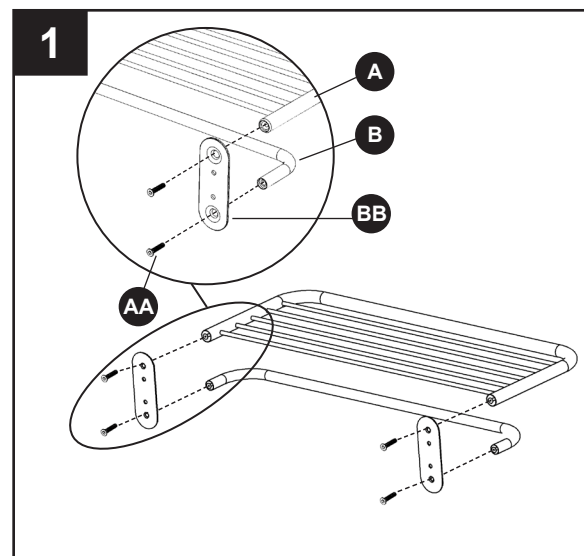


2. Hold the unit level at the desired position on the wall.

Mark the locations of the screw holes on the wall, then set aside assembly. If you are not installing the product to studs, hammer wall anchors (CC) into the wall at marked locations.


NOTE: Wall anchors (CC) should be oriented with the flat side horizontal.


For stud installations, drill 5/64 in. pilot holes at marked locations.

Place assembly back against wall and insert mounting screws (DD) into wall anchors (CC) or into drilled holes.

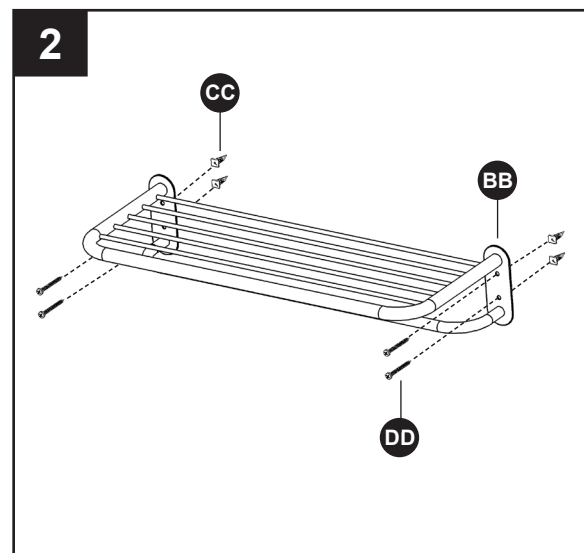

Hardware Used

CC Wall Anchor  x 4

DD Mounting Screw  x 4


CARE AND MAINTENANCE

Cleaning with a dry cloth may be sufficient, but for other stains or marks wipe gently with a damp cloth. DO NOT use strong detergents or abrasive cleaners; they may damage the surface of the product.

REPLACEMENT PARTS LIST

For replacement parts, call our customer service department at 1-877-888-8225, 8 a.m. - 8 p.m., EST, Monday - Friday.

PART	DESCRIPTION	PART #
AA	Hex-head Screw	L9005SSHB
BB	Mounting Bracket	L9005SSMB
CC	Wall Anchor	L9005SSHB
DD	Mounting Screw	

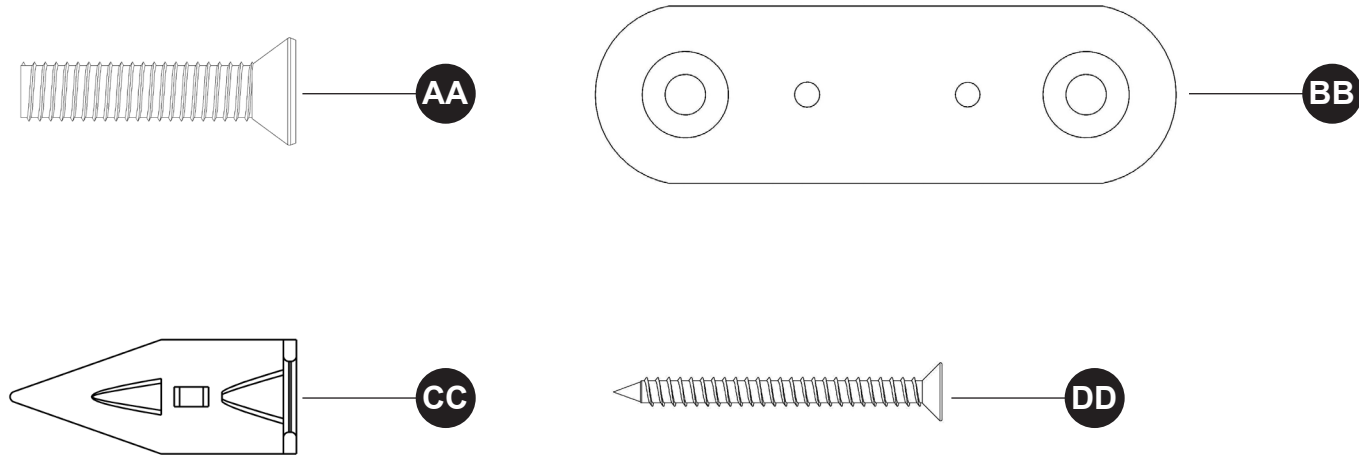

Printed in China

Style Selections® is a registered trademark of LF, LLC. All rights reserved.