

INSTALLATION INSTRUCTIONS

Item#4097-66A/84 (New. 02/02/2021)

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

MOUNTING THE FIXTURE (Fig.1)

1. Shut off power at the fuse box or circuit breaker and remove the old fixture included the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts on a clean area. Take care not to lose any small parts necessary for installation.
3. Attach the mounting plate (A) to the outlet box using outlet box screws (C) (Size: #8-32N*L0.5"). Then adjust the length of mounting screws (B) and tighten with hex nuts. The side of mounting plate (A) with "GND" marked must face out.
4. Install the tube (L) assembly into the coupling (M) of fixture body and tighten with the hex nuts on the tube (L). Thread tube (K) and metal ring (J) into top coupling of tube (L), then twist the lock collar (I) into the top of tube (L) until tight.
5. Determine the desired hanging height and connect thread rods (F1, F2 and F3). Pass the wires carefully through each rod as you assemble. Connect rod (F3) to the tube (L) and then screw loop (H1) onto rod (F1).
6. Attach the quick link (G) connect to loop (H1) and loop (H2) on the canopy (D), carefully feed the wire over loop (H1), quick link (G), loop (H2) and canopy (D).

CONNECTING THE WIRES (Fig.2)

7. At this point, connect the electrical wires as shown in Fig.2, making sure that all wire connectors (W) are secured. If your outlet box has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the fixture's ground wire directly to the mounting plate (A) using the green screw provided. After the wires are connected, tuck them carefully inside the outlet box.

FINISHING THE INSTALLATION (Fig.1)

8. Place the canopy (D) through the screws (B) on the mounting plate (A) and fix it with finials (E).
9. Unscrew the socket ring (P) from the fixture socket (N). Position the glass shade (O) onto the fixture and secure in place with the socket ring (P).
10. Install (4) four medium base (E26) bulbs (Q) up to 60 watts each or CFL or LED equivalent (not included) in accordance with the fixture specification—**DO NOT EXCEED THE MAXIMUM WATTAGE RATING! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**.

Fig.1

Set# A020-102

-Mounting Plate

-Ground Screw

-Mounting Screw*2


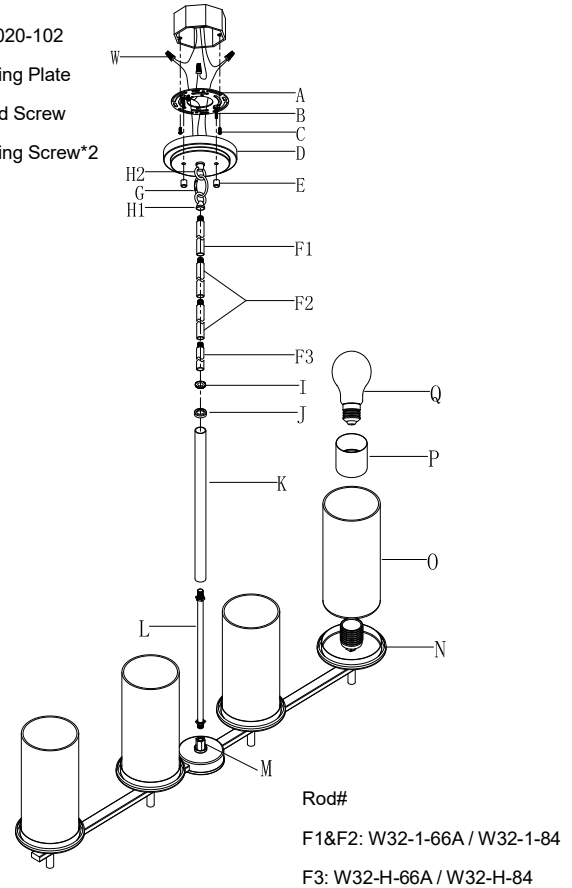


Fig.2

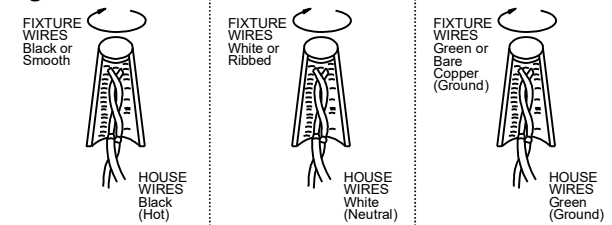

Note: Illustration (Fig.1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.

Your installation is now complete. Return power and test the fixture.