




Submitted Model No.: _ **Specific Features:**

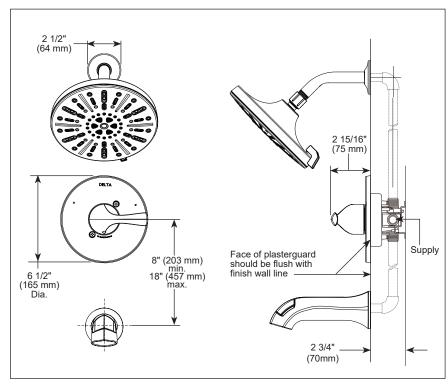





▲ Designate Proper Finish Suffix



see what Delta can do

TUB AND SHOWER FAUCET

■ Eldren[™] Bath Collection

FEATURES:

- Monitor[®] 14 Series pressure balanced single handle bath mixing valve trim
- Shower Head with four spray settings Spray settings include: Full Body Spray, Massaging Spray, Shampoo Rinsing Spray, and Pause

STANDARD SPECIFICATIONS:

- Maintains a balanced pressure of hot and cold water even when a valve is turned on or off elsewhere in the system
- For use with MultiChoice[®] Universal rough valve body (R10000 Series)
- Back-to-back installation capability
- · Solid brass forged body
- Temperature only controlled with handle
- Field adjustable means to limit handle rotation into hot water zone
- 120° maximum handle rotation
- Maximum 1.75 qpm @ 80 psi, 6.6 L/min @ 550 kPa
- Tub port maximum flow rate 6.0 qpm @ 60 psi with R10000-UNBX
- Shower arm overall horizontal length = 5 1/2" (138 mm), including threaded ends
- Hot & Cold temperature indicators on escutcheon
- All parts replaceable from the front of the valve
- Pull-up tub spout: 1/2" NPT iron pipe thread connection or 1/2" copper spout tube soldering connection

WARRANTY

- Parts and Finish Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date of purchase.
- Electronic Parts and Batteries (if applicable) 5 years from the date of purchase; or for commercial purchasers, 1 year from the date of purchase. No warranty is provided on batteries.



COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
- ASSE 1016
- Indicates compliance to ICC/ANSI A117.1 Valve control only EPA WaterSense®

Delta Faucet Company 55 E. 111th Street, Indianapolis, Indiana 46280 350 South Edgeware Road, St. Thomas, ON N5P 4L1 © 2023 Delta Faucet Company