


## **CAUTION**

- Inspect the wire insulation for any cuts, abrasions, or exposed copper that may have resulted during shipping. If there is a defect in the wire, do not attempt installation.
- Before starting installation of this fixture or removal of a previous fixture, disconnect the power by turning off the circuit breaker or by removing the fuse at the fuse box.

## **TOOLS REQUIRED**

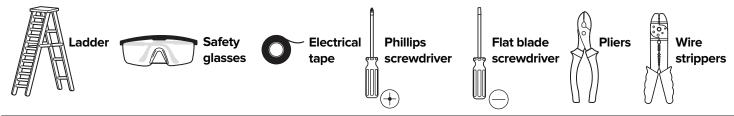

#### HARDWARE INCLUDED




#### \*PARTS SHOWN MAY DIFFER SLIGHTLY PER LIGHT FIXTURE

#### **INSTALLATION**

#### STEP 1

Unscrew the **ball nuts** from the **mounting unit**. Use the **mounting screws** to attach the **mounting unit** to the junction box.

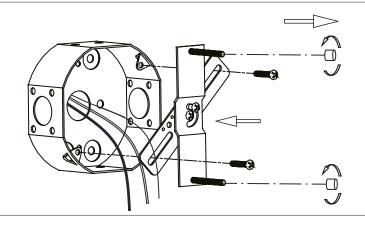


#### STEP 2


Make the electrical connection from the junction box to the **fixture**. Connect the ground wire to the **mounting unit** using the preinstalled green ground screw. Then, connect the positive, negative and ground wires with the supplied **wire nuts**. Secure with electrical tape.

Connect Clear, Brown, Gold or Black Parallel Wire without tracer (round & smooth) or Black Fixture Wire to:

Black or Red Supply Wire or Insulated Wire (other than green) with copper conductor. Connect Clear, Brown, Gold or Black \*Parallel Wire with tracer (square & ridged) or White Fixture Wire to:

White Supply Wire or Insulated Wire (other than green) with silver conductor



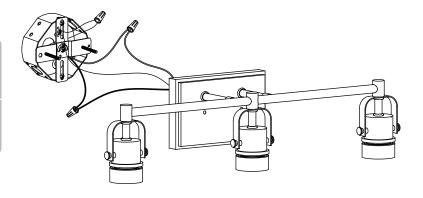


# **Assembly Instructions**

# **INSTALLATION**

# STEP 3


Attach the **fixture** to the **mounting unit** through **screw holes** as shown, and secure it with **ball nuts**.

Fixture can be installed up or down.

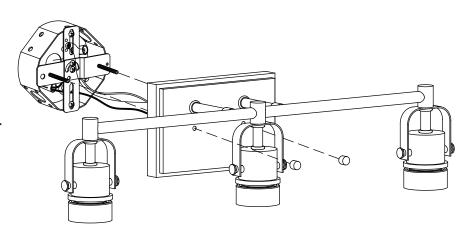

## STEP 4

Remove the **socket rings** from the socket. Attache the **glass shade** onto **fixture** using **socket rings**.

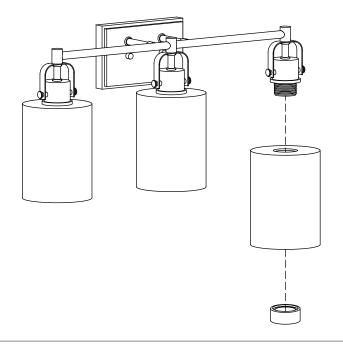

# STEP 5

Install bulbs (not included).

