



DI300-2

EXTENSION LADDER



Traction Cap™ endcaps



Continuous braided polyester rope



Dual action feet



NOT FOR USE NEAR ELECTRICITY

✓ TWIST-PROOF®



- STRONG LOCKS AND FEET
- DEEP RUNGS FOR STANDING
- SAFE WIDE BASE

250lb

LOAD CAPACITY

250lb

LOAD CAPACITY

Type 1 Duty Rating

Combined Weight of User and Materials

- Lightweight aluminum construction
- Twist-Proof® Alflo® rung joint
- Strong locks and feet
- Deep rungs for standing
- Safe wide base
- Traction Cap™ endcaps

Traction Cap™ endcaps

Interlocking side rails


Rope and pulley system

Continuous braided polyester rope

Spring loaded locks

Slip-resistant Traction-Tred® D-rungs

Dual action feet

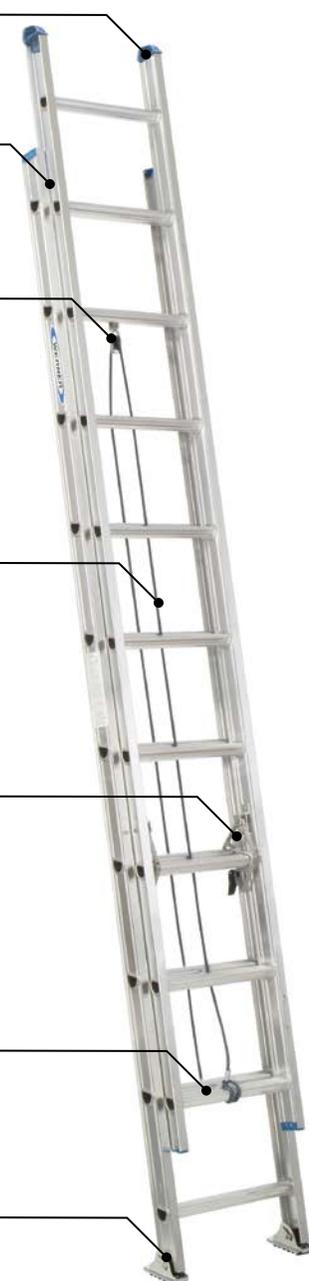

SPECIFICATIONS

| Model No. | Size (ft) | Max. Safe Working Height (ft) | Max. Open Extended Length (ft) | Approx. Closed Length (ft) | Reach Height (ft) | Approx. Shipping Weight (lbs) |
|-----------|-----------|-------------------------------|--------------------------------|----------------------------|-------------------|-------------------------------|
| D1316-2* | 16 | 13 | 13 | 8 | 15 | 26 |
| D1320-2 | 20 | 17 | 17 | 10 | 19 | 32.5 |
| D1324-2 | 24 | 21 | 21 | 12 | 23 | 40 |
| D1328-2 | 28 | 25 | 25 | 14 | 27 | 50.5 |
| D1332-2 | 32 | 29 | 29 | 16 | 31 | 63.5 |
| D1336-2 | 36 | 32 | 32 | 18 | 34 | 77.5 |
| D1340-2 | 40 | 35 | 35 | 20 | 37 | 85.5 |

*Note: D1316-2 is not equipped with rope and pulley

DIMENSIONS

| | | | |
|----------------|------------|-------------------|------------|
| Rails: | 3 in. | Rung: | 1-3/4 in. |
| Flange: | 1-1/16 in. | Fly Width: | 15-1/4 in. |



Exclusive Alflo® rung joint means Twist-Proof® performance

