

### Features

- Two-function pull-down sprayhead with touch-control allows you to switch from stream to Sweep® spray.
- Sweep® spray features specially angled nozzles that form a wide, powerful blade of water to sweep your dishes and sink clean.
- DockNetik® magnetic docking system securely locks the sprayhead into place when not in use.
- ProMotion® technology's light, quiet braided hose and swiveling ball joint make the pull-down sprayhead easier and more comfortable to use.
- MasterClean™ sprayface features an easy-to-clean surface that withstands mineral buildup.
- High-arch swing spout offers vertical clearance for tall cookware and pitchers.
- Two lever handles offer separate control of hot and cold water.
- KOHLER® ceramic disc valves exceed industry longevity standards, ensuring durable performance for life.
- 1.5 gpm (5.7 lpm) maximum flow rate at 60 psi (4.14 bar).
- Box includes: Assembled faucet, supply lines, top-fill soap/lotion dispenser.

### Material


- Premium metal construction for durability and reliability.
- KOHLER finishes featuring ScratchShield® technology withstand even the toughest daily use.

### Installation

- Installs with 1-, 2-, 3- or 4-hole sink.
- A minimum of 1 hole is required for installation. Unique grips secure the faucets handle bases to the countertop without the need for additional holes.
- Flexible supply lines and quick-connect fittings simplify installation.
- Longer shank works with countertops up to 2-1/2" thick and is easy to install. Simply hand-tighten and secure with a screwdriver.

### Recommended Products/Accessories

K-23723 Faucet cleaner

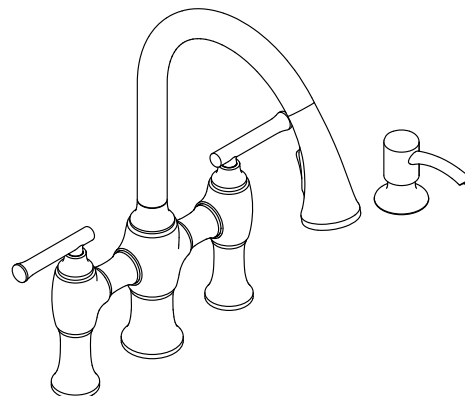

ADA CSA B651

### Codes/Standards

ASME A112.18.1/CSA B125.1

NSF/ANSI 61

NSF/ANSI 372

All applicable US Federal and State material regulations

DOE - Energy Policy Act 1992

California Energy Commission (CEC)

ADA

ICC/ANSI A117.1

CSA B651

### KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.



**Faucet:**

Pressure: 60 psi (4.1 bar)

**Spout:**

Spout reach: 9-7/16" (240 mm)

## Notes

ADA, CSA B651 compliant when installed to the specific requirements of these regulations.