



Product Submittal	
Name	
Date	
Architect/Owner	
Contractor	
Tag	
Notes	

Iron Pipe Washing Machine Specification Sheet

Description

1/2 in. MIP inlet or nominal sweat connection makes for quick installation and quarter-turn, full-port brass ball valve makes for easy operation.

Features And Benefits

- Sleek chrome finish for an attractive appearance.
- Quarter-turn full-port brass ball valve.
- Compatible with MIP threads and 1/2" nominal Copper.

Specification Data

Materials	
Valve body	DZR LF brass
Handle	Zinc
Valve ball	DZR LF brass
Seat	PTFE

Temperature Performance

- Minimum working temperature 33°F
- Maximum working temperature 160°F
- Maximum working pressure 125 psi

Flow Rate

- 3/4" Male Hose Thread 4.0 GPM at 20 psi




Part Listing

- WMV1234Z2 1/2 in. MIP or Nominal Sweat X 3/4 in. Male Hose Thread

Dimensions

Part Number	DIM A (IN)	DIM B (IN)
WMV1234Z2	1.38	4.65

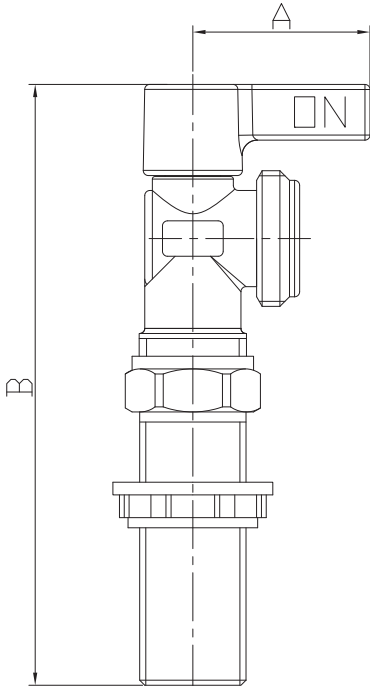

Codes and Listing

cUPC
 ASME A112.18.1
 CSA B125.1
 NSF/ANSI/CAN 61
 NSF/ANSI 372

