



Frameless Sliding Shower Door K-707100-L

Features

- Center-guided mechanism for smooth, quiet sliding action and easy cleaning.
- Contemporary towel bar and knob combination offers storage on the outside of the door without encroaching on the bathing space.
- CleanCoat®+ glass coating creates a hydrophobic barrier that repels water, soap scum, and residue, saving time and protecting shower doors 10 times longer than original CleanCoat. (Based on 2021 internal wear/abrasion testing using a microfiber cloth.)
- Tempered glass ensures enhanced safety and durability.

Material

Frameless, 1/4" (6 mm) thick Crystal Clear tempered glass.

Technology

- Frameless design with minimal metal allows for greater ease of cleaning.
- Low bottom track creates easy entry and exit to the bathing space.

Installation

- Out-of-plumb adjustability simplifies installation.
- Sliding shower door.
- Not for use in hospitality.

Included Components

Additional Components:

Hardware kit



Codes/Standards

ANSI Z97.1 CPSC 16CFR 1201

KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.

Color	Code	Description
	SHP	Bright Polished Silver
	ABZ	Anodized Dark Bronze
600	BNK	Anodized Brushed Nickel

Available Glass Options Code Description


Crystal Clear







Frameless Sliding Shower Door K-707100-L

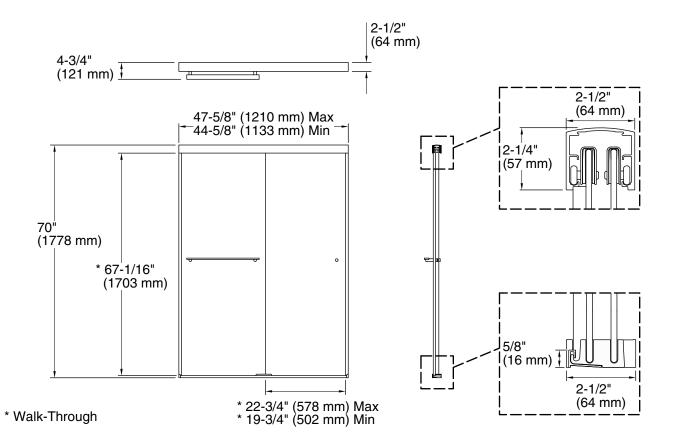

Technical Information

All product dimensions are nominal.

Installation type: For shower base installation

Opening Width - 44-5/8" (1133 mm)

Min:

Opening Width - 47-5/8" (1210 mm)

Max:

Walk-through - Min: 19-3/4" (502 mm)
Walk-through - Max: 22-3/4" (578 mm)
Base-To-Wall 3/8" (10 mm)

Radius - Max:

Glass thickness: 1/4" (6 mm)
Glass coating: CleanCoat+

Notes

Install this product according to the installation guide.

Wall jambs are made of clear plastic and may not cover existing shower door holes.

NOTICE: The vertical opening should be a minimum of 72-1/2" (1842 mm) to allow clearance for installing the top track over the wall jambs.

The vertical opening should be a minimum of 72-1/2" (1842 mm) to allow for installation clearance.

