
INSTALLATION MANUAL

If you have any questions, please feel free to contact us. Email: lowesteam@aminalife.com



1. New installations


NOTE!!!

- 1. Supply lines should be purged to clean impurities before connecting the unit.
- 2. The hot water supply should be connected to the left and the cold water supply to the right, when viewed from the operating position. If this is not taken into account can cause permanent damage to the cartridge.
- 3. Screw connections and test for leaks.
- 4. Using a spirit level on the cams, the mixer align horizontally, vertically and parallel to the wall.
- 5. Warm reminder: In the cold areas or the indoor temperature is less than 39°F in Winter, if no using the faucets for a long time, please turn off the inlet water valve and drain the remaining water inside the supply pipe, which can avoid the faucet damage caused by the expansion of the frozen water.


2. Installation Preparation

- 1. Read the instructions carefully before installing.
- 2. The installation must be performed by a qualified person
- 3. Installation tools:



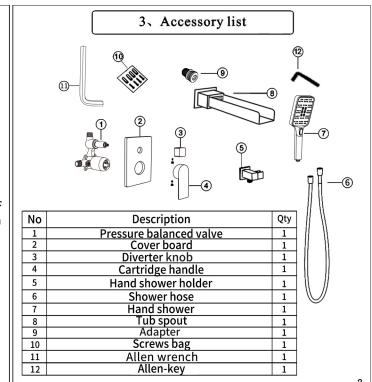


4. Pressure-balanced valve

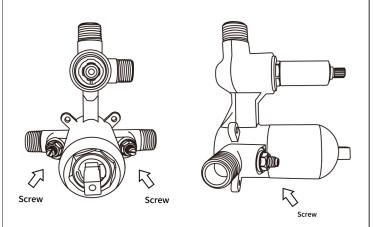


- be screwed deeper to adjust the water flow
- 1.) The both side screws can 2.) When the cartridge need to be change, just screw the screws deepest, so that you do not need to turn off the main switch of your water

5. Chiseling wall diagram

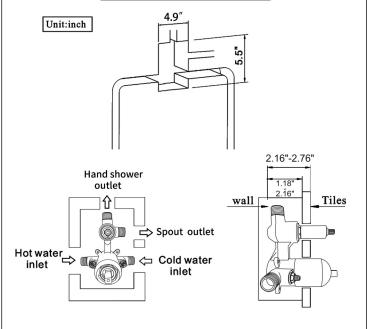


6, Pipe-connection diagram




7. Water test and leak detection

- 1. After connecting all pipes, please dis-assembling the plastic protection cover, and switch on/off the cartridge, check all connections without any leakage, and all connections connecting to the required functional outlets.
- 2.Re-install the plastic protection cover to the valve.




8, Wall tiling program

1. Use aparallel ruler to make sure the wall and valve being parallel.



9. Cover and handle installation


- 1. Take off the plastic protection cover.
- 2.Put the cover board on the valve and tight the handle firmly



8


10. Spout installation

- 1.Twist some Teflon tape to the thread on the adaptor
- 2. Screw the adaptor to the water pipe with Allen wrench
- 3.Inset the spout to the adaptor then lock it with screws

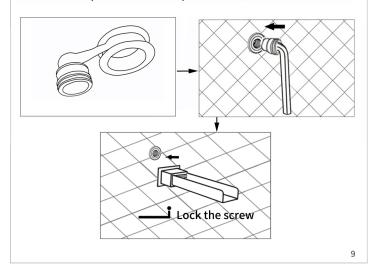

11. Shower installation





12. Cleaning & Maintenance

To keep the product clean&shining, follow the steps as follows:

- 1. Flush with clean water& dry with soft cloth only.
- 2. If any dirt, clean with soft liquid or transparent glass detergent.
- 3. Do not use any scrubbing detergent, polisher, sand-cloth, paper tissue or scraper.
- 4. Do not use acid detergent, insoluble&grain-like detergent or soap.

10

11