

# Assembly Instruction Sheet #IS-PRV8408K For Style PRV8408K

Tools Required: Flathead screwdriver, Phillips screwdriver, pliers, wire cutters, wire strippers, electrical tape, safety glasses.

Bulb Recommended: (2) Candelabra Base 60W Maximum.

Estimated Assembly Time: 30-45 minutes

**Preparation:** Identify and inspect all parts before beginning installation. Check package content list and diagrams below to be sure all parts are present. If any parts are missing or damaged, do not attempt to assemble, install, or operate the fixture. Contact customer service for replacement parts.


Fixture can only be mounted in the direction indicated on page 2.

## ▲ Warnings and Cautions

Turn off electricity at circuit breaker or main fuse box before installation. Consult a licensed electrician if in doubt.


These instructions are provided for your safety. It is very important you read them completely before installing the fixture. We strongly recommend that a licensed, professional electrician perform the installation.

Disconnect fixture from power source before replacing bulbs. Make sure bulbs are given sufficient time to cool before removal. Do not subject glass parts to any shock while in operation or shattering may result.

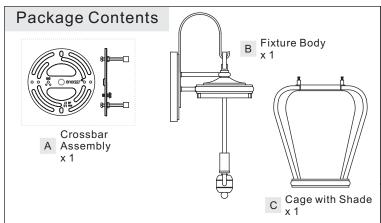

#### STEP 2 - Install Inner Backplate

A. Pass the supply wires through the Crossbar Assembly (A). Attach the Crossbar Assembly (A) to the Outlet Box with the head of the Green Ground Screw facing you. Secure it with Outlet Box Screws (not included). Tighten until snug.



### STEP 1 - Install Bulbs, Cage with Shade and Fixture Body

- A. This fixture uses candelabra bulb with standard screw base. Maximum 60 watts. Insert bulb and screw snugly into place.
- B. Remove Lock Screws from top edge of Cage with Shade (C).

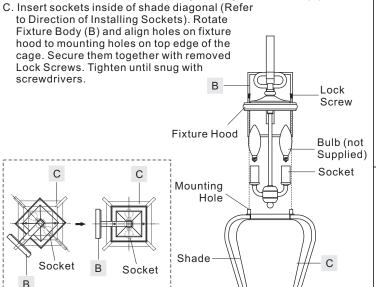


Figure 1


**Direction of** 

Installing Sockets

© 2014 Quoizel Inc.


# STEP 3 – Fit Fixture Body to Crossbar Assembly

A. Remove mounting balls from the Crossbar Assembly (A). Fit the Fixture Body (B) to Crossbar Assembly (A) and secure with mounting balls. Note: The backplate of the Fixture Body (B) should be snug against the wall surface and the mounting balls. If not, adjust the length of the nipple on the Crossbar Assembly (A) by unscrewing the preassembled hex nut and lock washer and then screwing the mounting screws in or out of the crossbar until the correct length is achieved. Once the backplate of the Fixture Body (B) is secure, remove the mounting ball and Fixture Body (B) and proceed to Step 4.



#### STEP 4 - Wire Connections

A. Use standard wire connectors (not included) to make all wire



Thank you for purchasing a Quoizel product. Need assistance with parts or assembly? Call Quoizel customer service at 1-631-273-2700 or visit us on-line at www.quoizel.com

