

Assembly Instructions

Please read these instructions carefully before starting assembly. We suggest you carry out the assembly on a soft surface like a carpet, so as to avoid scratching the paint. Please note because of the nature of cast metal, you may find roughness on the surface which enhances the beauty of the product and is not a defect.












*Do not discard any of packaging until you have checked that you have all parts and pack of fittings.

*Keep children away during assembly. This item contains small parts which can be swallowed by children.

*Retain the assembly instructions for future reference.

*Maximum load on the edge of the table is 5kg

PARTS LIST


Part No.	Description	Part picture	Qty	Part No.	Description	Parts Picture	Qty.
①	Table Top		1	A	M8 Nut		8
②	Table Leg		4	B	M8 Spring washer		8
③	Leg Support		1	C	M8 Flat washer		8
④	Wrench		1	D	M8 protect hats		8
⑤	Allen wrench		1	E	Stud M8X35		8
⑥							
L	Rubber Leg Pad		4	Note:Rubber Leg Pad L have been presaaembled			

Step 1




Place all parts on a clean and soft surface

Step 2

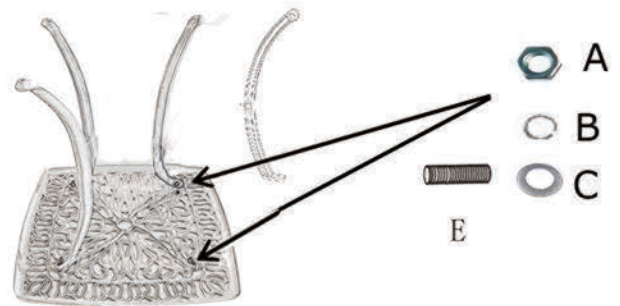

Turn over the table top. Attach the Stud M8(E) into the Nuts (inside table top), Then, Attach table Legs (②) to the Studs on the Table Top (①) using Washers and Nuts (A, B, C). DO NOT over tighten

Step 3

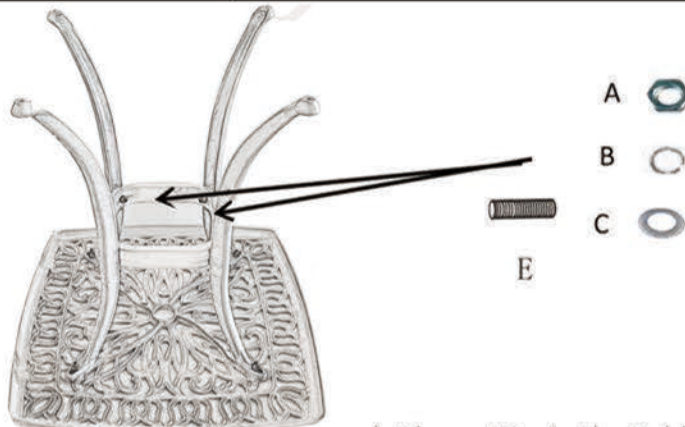

Attach the Stud M8(L) into the Nuts (inside table leg), Then, Attach the Table legs Support (③) to the four Legs (②) using flat washer, spring washer and nuts (A, B, C) DO NOT over tighten.

Step 4



Tighten all Nuts with Wrench. And Turn over the table. Adjust the pre-installed Rubber Pad (L) until the Table is level with the ground, Tighten all the nuts and cover them with nut caps (D). Your table can use now.