




Models:	Finish:
· 71011	· Chrome
· 72231	· Brushed Gold
· 78171	· Matte Black
· 76451	· Brushed Nickel
· 76811	· Oil Rubbed Bronze

Application Instruction

1. Gradually pull the handle, it will be more advantageous to protect the cartridge.
2. When pull the handle top, then turn left, the water outlet is hot water; gradually turn left, the flow rate is larger; turn right, the water outlet is cold water, gradually turn right, the flow rate is larger.



Standard Part List

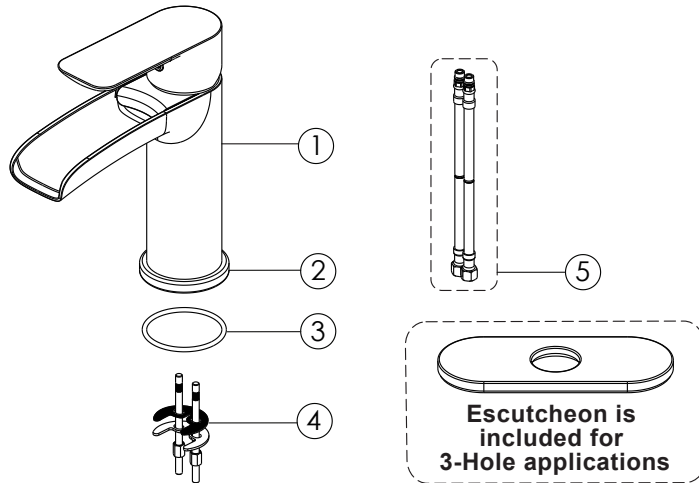

NO.	Part Name	Quantity
1	Body Assy	1
2	Base	1
3	O-Ring	1
4	Fitting Assy	1
5	Water Supply Hose	2

BEFORE INSTALLATION

- To insure proper installation, please read the following instructions carefully.
- Please make sure that the water supply has been shut off at the stop valve.
- NEWATER reserves the right to update product without notice.

Installation Steps

1

1. Make sure there is a $\varnothing 30\text{-}\varnothing 33\text{ mm}$ Hole on the basin before fix the mixer, Unscrew the ④ Fitting ASSY from the bottom of the body, then get the body through the hole, don't forget to fix the ③ O-ring between the bottom of the ① Body and the Basin.

2

2. According the remove step to screw up the fixing set to the mixer below the basin. Use hand to screw up the locknut, then use install tool for fixing strengthen.

3

3. Connect and screw on the ⑤ Supply Hoses to Valves.

4. Turn on faucet to check for leaks.