

# TOTO®

# MW4742044CUFG

## Vespin® II 1G® Connect+™ Toilet, 1.0GPF with Washlet® C200 Connect+

### FEATURES

- Concealed supply connection for seamless installation
- Ultra high-efficiency Tornado Flush™ (1.0GPF/3.8LPF)
- Skirted design
- CeFiONtect™ glaze prevents debris from sticking to ceramic surfaces for easy cleaning
- Universal Height
- Elongated front bowl
- 12" Rough-in, less supply
- Optional 10"; 14" Uni-fit rough-in
- Chrome trip lever
- See Spec sheet SW2044T20 for Washlet features

### MODELS

- CT474CUFGT20  
Bowl with CeFiONtect glaze
- ST453U Tank and cover only
- ST453UR Tank and cover only, right hand trip lever

### REQUIRED WASHLET CONNECT+

- SW2044T20 Washlet® C200 Connect+  
Fits TOTO Connect+ toilet bowl models only

### COLORS/FINISHES

- Standard  
#01 Cotton

### OPTIONAL ROUGH-IN



- 10" rough-in      TSU01W.10R
- 14" rough-in      TSU01W.14R

### PRODUCT SPECIFICATION

The two-piece ultra high-efficiency Tornado Flush toilet shall be 1.0GPF/3.8LPF. Universal Height Toilet with CeFiONtect glaze finish. Toilet shall have high-profile tank, elongated front bowl and chrome trip lever. Toilet shall be **TOTO Model CT474CUFGT20#01**.

See TOTO Specification sheet **SW2044T20** for details on required Washlet.



 **CeFiONtect**      connect+  
 **Tornado Flush**

### CODES/STANDARDS

- Meets and exceeds ASME A112.19.2/CSA B45.1
- Certifications: IAPMO(cUPC), EPA WaterSense, State of Massachusetts, City of Los Angeles, and others
- Code compliance: UPC, IPC, NSPC, NPC Canada, and others
- Legislative Compliance: California AB715, California Green Building Code, City of Los Angeles Water Efficiency Ordinance
- ADA compliant (when installed with trip lever located on the approach side)



# MW4742044CUFG

## Vespin® II 1G® Connect+™ Toilet, 1.0GPF with Washlet® C200 Connect+

### SPECIFICATIONS



- Water Use 1.0 GPF/3.8LPF
- Flush System Tornado Flush™
- Min. Water Pressure 8 psi (flowing)
- Water Surface 6-7/8" x 9-3/4"
- Trap Diameter 2-1/8"
- Rough-in 12" (10" or 14" optional)
- Trap Seal 2-1/8"
- Warranty One Year Limited Warranty
- Material Vitreous china
- Shipping Weight CT474CUFGT20 57.3lbs.  
ST453U(R) 28.0lbs.  
SW2044T20 16.0lbs.
- Shipping Dimensions CT474CUFGT20  
30-1/8" L x 16-3/4" W x 22" H  
ST453U(R)  
18" L X 9" W X 16" H  
SW2044T20  
23 1/2" X 19" X 9"

- See Spec sheet **SW2044T20** for Washlet details

### INSTALLATION NOTES

Back-to-Back Toilet Installations:

TOTO recommends the use of a nationally listed, double sanitary tee-wye only, in vertical waste stacks, in accordance with the stipulations noted in the majority of nationally recognized plumbing codes.

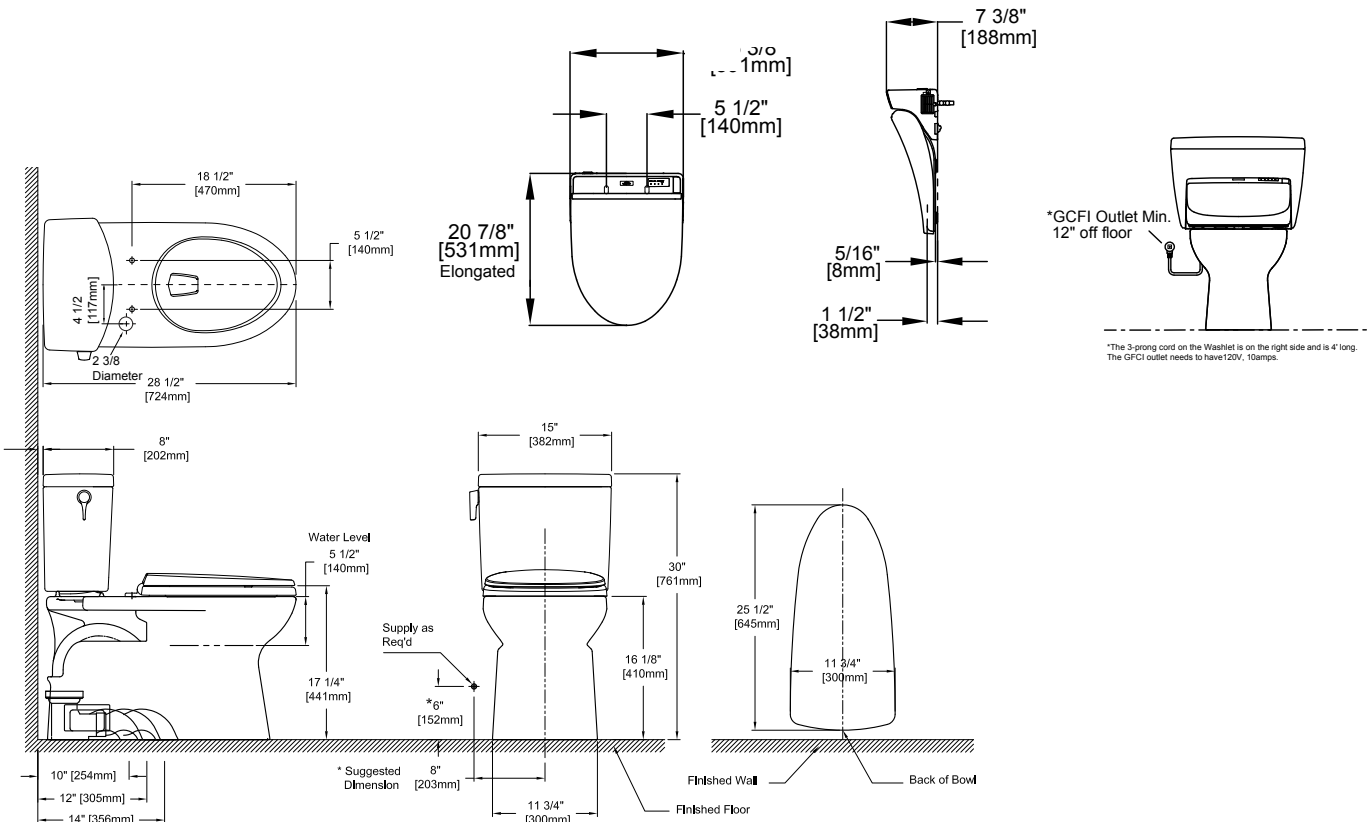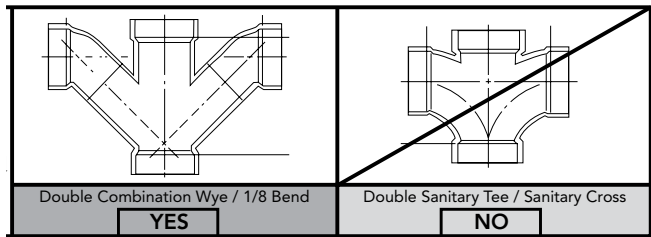

**TOTO®**

*These dimensions and specifications are subject to change without notice*