

Assembly Instruction Sheet #IS-9807P39 For Style 9807P39


Tools Required: Flathead screwdriver, Phillips screwdriver, pliers, wire cutters, wire strippers, electrical tape, safety glasses

Light Source: (6) E26 Bulb 60W Maximum (Not Included)
Estimated Assembly Time: 15-30 minutes
Preparation: Identify and inspect all parts before beginning installation. Check package content list and diagrams below to be sure all parts are present. If any parts are missing or damaged, do not attempt to assemble, install, or operate the fixture. Contact customer service for replacement parts.

Warnings and Cautions

Turn off electricity at circuit breaker or main fuse box before installation. Consult a licensed electrician if in doubt.
These instructions are provided for your safety. It is very important you read them completely before installing the fixture.
We strongly recommend that a licensed, professional electrician perform the installation.
Disconnect fixture from power source before replacing bulbs. Make sure bulbs are given sufficient time to cool before removal.

Package Contents

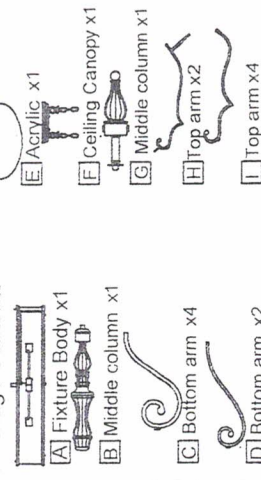

Hardware Contents

PART	DESCRIPTION	QUANTITY
AA	Decorative Caps	2 pcs
BB	Electrical Nuts	2 pcs
CC	Outlet Box Screw	2 pcs
DD	Mounting Screws	2 pcs
EE	Mounting bracket	1 pc

STEP 1 - Fit (B) Middle column to (A) Fixture Body

- Get the wire through the (B) Middle column.
- Install the (H) Top arm and (I) Top arm on the (A) Fixture Body and lock it with screws

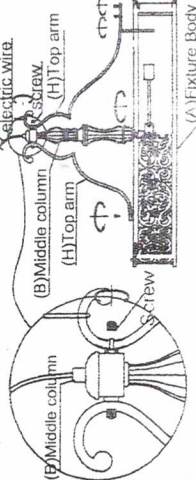


Figure 1

STEP 2 - Fit (E) Acrylic to (A) Fixture Body

- Fit (E) Acrylic to (A) Fixture Body
- Install the (H) Top arm and (I) Top arm to (G) Middle column and lock it with screws
- Install the (G) Middle column to (A) Fixture Body and lock it with screws

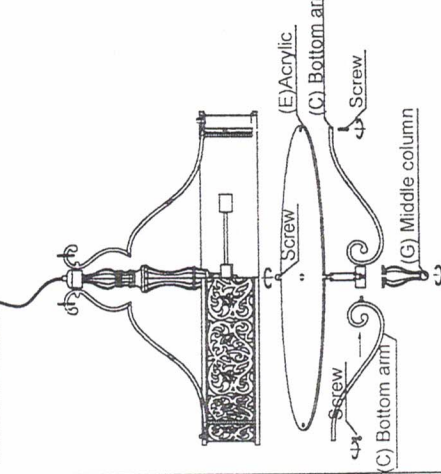


Figure 2

STEP 3 - Attach Mounting Screws, Lock Washers and Hex Nuts to Mounting bracket.

- Line up a set of holes on the Mounting bracket (EE) and Holes on the Backplate. Pass Lock Nuts onto the Mounting Screws (DD). Hand tighten until snug.

Figure 3

STEP 4 - Attach Mounting bracket to Outlet Box

- Pass the supply wires through the Mounting bracket (EE). Attach the Mounting bracket (EE) to the Outlet Box with the head of the Green Ground Screw facing you. Secure it with Outlet Box Screws. Tighten until snug.

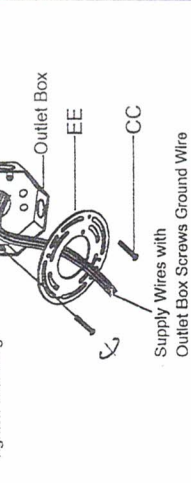


Figure 4

STEP 5 - Fit Backplate to Mounting bracket Assembly

- Fit the backplate to Mounting Screws (DD) and secure with Decorative Caps (AA). Note: The backplate should be snug against the ceiling and the Decorative Caps (AA). If not, adjust the length of the Mounting Screws (DD) by unscrewing the Hex Nut and Lock Washer and then screwing Mounting Screws (DD) in or out of the Mounting bracket (EE) until the correct length is achieved. Once the Ceiling Canopy is secure, remove the Decorative Caps (AA) and Ceiling Canopy and proceed to Step 4

Figure 5

STEP 6 - Wire Connections

- Use standard wire connectors to make all wire connections. Twist connectors until wires are tightly joined. Wrap each connection with approved electrical tape and stuff all the connected wires into the Outlet Box.

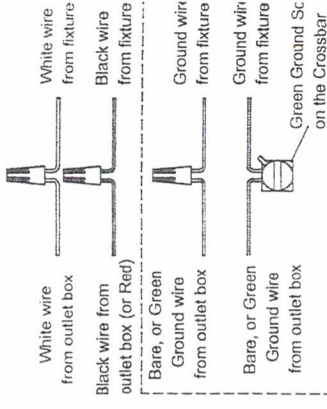


Figure 6

STEP 7 - Install Ceiling Canopy to Ceiling

- Carefully tuck all wires into the outlet box and position the Canopy of the Fixture Body (A) over the outlet box. Align the in the Ceiling Canopy with the Mounting Screws (DD). Secure with Decorative Caps (AA) and hand tighten until snug

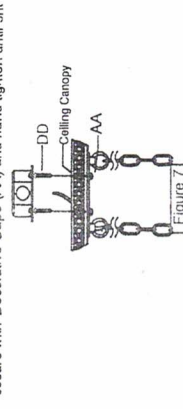


Figure 7

STEP 8 - Install Bulbs.

- Install bulbs (Not Include) onto sockets and push snug into place.

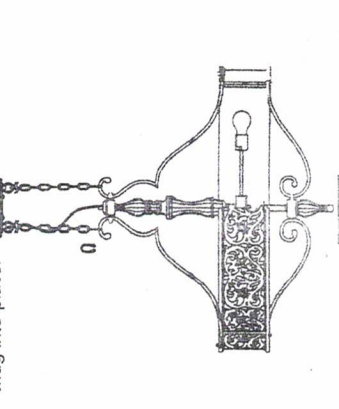


Figure 8