

SUPER SEAL®

Easy How-To Info...

1 Clean...

Sweep & clean off entire driveway. Scrub oil, gas spots & stains - rinse away dirty residue with water.



2 Fill...

Snip spout & pour crack filler into crack until just below asphalt surface. Don't overfill. Remains pliable.



3 Patch...

Fix large cracks & low spots by troweling in layers (1/4" - 1/2" thick) of Smooth Patch. Once cured, you can build up another level...feather edges.



Scoop pot hole patch into ruts, potholes and cut outs...fill above asphalt surface...then tamp to surface level. Wait 2 weeks before sealing over.



WARRANTY: The methods and techniques described herein represent some that have been used successfully to obtain the desired results. Allow new pavement to fully cure - we recommend 12 months prior to sealing. If water "beads up" on pavement, it has not fully cured. All variations in asphalt, climate conditions and equipment cannot be anticipated by Dalton Enterprises, Inc. The decision to use any of these methods and techniques is entirely at the election and responsibility of the user. Sealer is warranted from defects for a period stated on the pail from date of purchase when applied according to our application instructions. Since seller cannot control the manner of use of its products after their sale, seller will not be responsible for any consequential or indirect damages. Dalton Enterprises, Inc. will not be liable for areas that have ponding waters, poor drainage or snow removal damage. If product is deemed defective, it shall be replaced by Dalton Enterprises, Inc. No warranties will apply if the goods are in any way altered or modified after delivery by seller. There are no express warranties which extend beyond the description on the face hereof, manufacturer disclaims any implied warranties. This warranty does not include labor cost incurred for the application, re-application or consequential damage costs. Failures due to acts of God, fire, structural defects or causes beyond our control are excluded from this warranty. If repair products were used, *Super Seal®* repair products must be used for warranty to be honored. Two coats must be applied to validate warranty. Not applicable on commercial parking lots. This warranty gives you specific rights and you may also have other rights which may vary from state to state. Original proof of purchase required for warranty claims.

4 Seal...

For BEST Results: Allow patch & repairs a minimum of 24 hours to cure. We recommend sealing when temperature is 55 degrees F but since Super Seal XS10 contains ThermaSEAL™ Technology it will cure in cooler temperatures...down to 40 degrees F. Make sure no rain is forecast for at least 36 hours.

Pour it...

Sweep & clean surface thoroughly. If blacktop is extremely hot, apply a fine water mist prior to sealing; brush out any remaining puddles. Open the pails. A small amount of water separation due to condensation may be on top - this is normal, so mix as needed. Complete entire driveway in one continuous application to prevent color shading. You can edge the driveway first with a large paint or wallpaper brush. Pour *latex•ite®* sealer across the high end of the driveway in a ribbon pattern (side to side).

Spread it...

Using a squeegee spread sealer side to side by pulling squeegee across driveway removing the excess sealer. Apply steady down pressure as two thin coats are better than one thick coat. Allow first coat to dry thoroughly before applying the second coat. Driveway will be foot traffic ready in 1 hour in good drying conditions. For vehicle traffic allow 24-48 hours to allow for proper cure.



Remember to apply thin coats.



SUPER SEAL®

XS10

X-TREME SEAL™

DRIVEWAY FILLER SEALER

ThermaSEAL™ TECHNOLOGY
Cures in Temps down to 40°F

• **MAXIMUM DURABILITY Formula**

• **FAST DRY Foot Traffic in 1 Hour**

• **BEST FINISH with added UV Protection**

• **EASIEST MIX Gel Formula**

• **NON-SKID Texturized Formula**


ADVANCED EZ-Gel® Save Time

www.super-seal.us

For Asphalt
Covers 300 - 500 SQ. FT. See back for details

4.75 GALLONS (17.9L)

KEEP FROM FREEZING

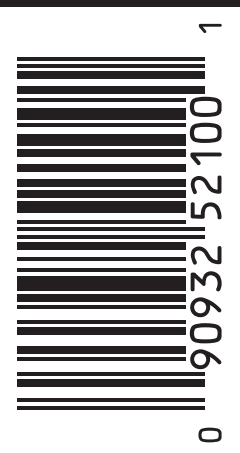

CAUTION / FIRST AID: Transport & store in an upright position. *Super Seal®* XS10 contains no solvents. Protective eyewear & clothing should be used during application.

- If ingested: Do not induce vomiting. Consult a physician immediately.
- For skin contact: Wash with soap & water.
- For eye contact: Flush thoroughly with clean water for at least fifteen minutes & consult a physician immediately.
- Container is recyclable
- Do not pour excess in drains or watercourses.

CAUTION! KEEP OUT OF REACH OF CHILDREN

Contents/CAS#: Water 7732-18-5; Asphalt 8052-42-4; Clay 1332-58-7; Polymers Proprietary; Filler 14808-60-7. Refer to MSDS sheet for more information.

VOC: less than 25 g/l Product is asbestos free

FOR EXTERIOR USE ONLY.

⚠ WARNING: This product can expose you chemicals including Carbon Black and Crystalline Silica, which are known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov.

*At time of manufacture, this container was filled at 5 gallons. Due to the reduction in volume that occurs after cooling, settling & other environmental factors, the actual volume may be less.

D DALTON ENTERPRISES, INC.

Super Seal® is a trademark of: Dalton Enterprises, Inc., Cheshire, CT 06410, USA Ph. 800-851-5606 www.super-seal.us Copyright © 2020

⚠ WARNING
⚠ AVISO



Children can fall into bucket and drown.
Keep children away from bucket with even a small amount of liquid.

Los niños corren peligro de caerse dentro del balde y ahogarse.

Mantener a los niños lejos de los baldes, incluso cuando sólo tengan una pequeña cantidad de liquido.

COVERAGE PER PAIL	
Surface Condition	Square Foot Range*
Smooth/Previously Sealed	400 - 500 sq ft.
Rough, Porous or Unsealed	300 - 400 sq ft.
*Amount varies depending on pavement condition & method of application	



SUPER SEAL®

XS10

X-TREME SEAL™

DRIVEWAY FILLER SEALER

ThermaSEAL™ TECHNOLOGY
Cures in Temps down to 40°F

• **MAXIMUM DURABILITY Formula**

• **FAST DRY Foot Traffic in 1 Hour**

• **BEST FINISH with added UV Protection**

• **EASIEST MIX Gel Formula**

• **NON-SKID Texturized Formula**

ADVANCED EZ-Gel® Save Time

www.super-seal.us

For Asphalt
Covers 300 - 500 SQ. FT. See back for details

4.75 GALLONS (17.9L)