

(2 LOCATIONS)
SUPPLIED WITH
CLOSING PLATE



2.50 MAX A HUB
[64]

18.35
[466]

7.36
[187]

1.82
[46]


1.92
[49]

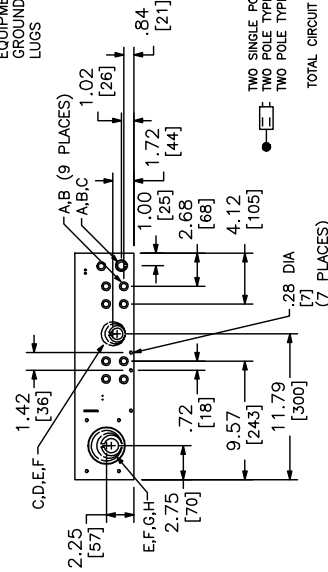


TWO SINGLE POLE, ONE PLUG-ON SPACE TYPE HOMT OR ONE SINGLE POLE TYPE HOM.
TWO POLE TYPE HOMT, HOM OR HOMA (125A MAX) MAY PLUG ON TWO ADJACENT SPACES.
TWO POLE TYPE HOMA (150-200A) MAY PLUG ON FOUR ADJACENT SPACES.

TOTAL CIRCUIT BREAKER HANDLE RATING NOT TO EXCEED 160A PER CIRCUIT CONNECTOR.

A SQUARE D UL LISTED SECONDARY SURGE ARRESTER MAY PLUG
ON TWO ADJACENT SPACES. ORDER CATALOG NO., HOM2175SB.



NOTES:
FINISH — GRAY BAKED ENAMEL POWDER
COAT PAINT OVER CLEANED GALVANNEALED STEEL.
MAXIMUM SYSTEM VOLTAGE:
120/240VAC, 103W, 50-50 HZ
208Y/120VAC, 103W, 50-60HZ
(FROM A 3ØW SYSTEM)
UL LISTED — FILE E-6294 VOL M
SUITABLE ONLY FOR USE AS SERVICE EQUIPMENT.
SUITABLE FOR UNDERGROUND/OVERHEAD SERVICE.



METER COVER LATCH

**UTILITY WIREWAY
SEAL BRACKET**

DUAL DIMENSIONS:

AMPERE RATING	FACTORY INSTALLED BYPASS TYPE	SHORT CIRCUIT CURRENT RATING	CATALOG NUMBER	SERIES	SPACES	MAXIMUM NUMBER OF SINGLE POLE HOM CIRCUITS	LINE SIDE PHASE & NEUTRAL LUGS AWG/KCMIL	SERVICE GROUND LUG AWG	FEED THROUGH LUGS PHASE & NEUTRAL AWG/KCMIL
150	LEVER	22K	RCB16F150SL RCB16F150LSL	M01	8	16	#6-350 CU/AL	#14-2/0 CU #12/2/0 AL	#4-250 CU/AL
200	LEVER		RCB16F200SL RCB16F200LSL						