


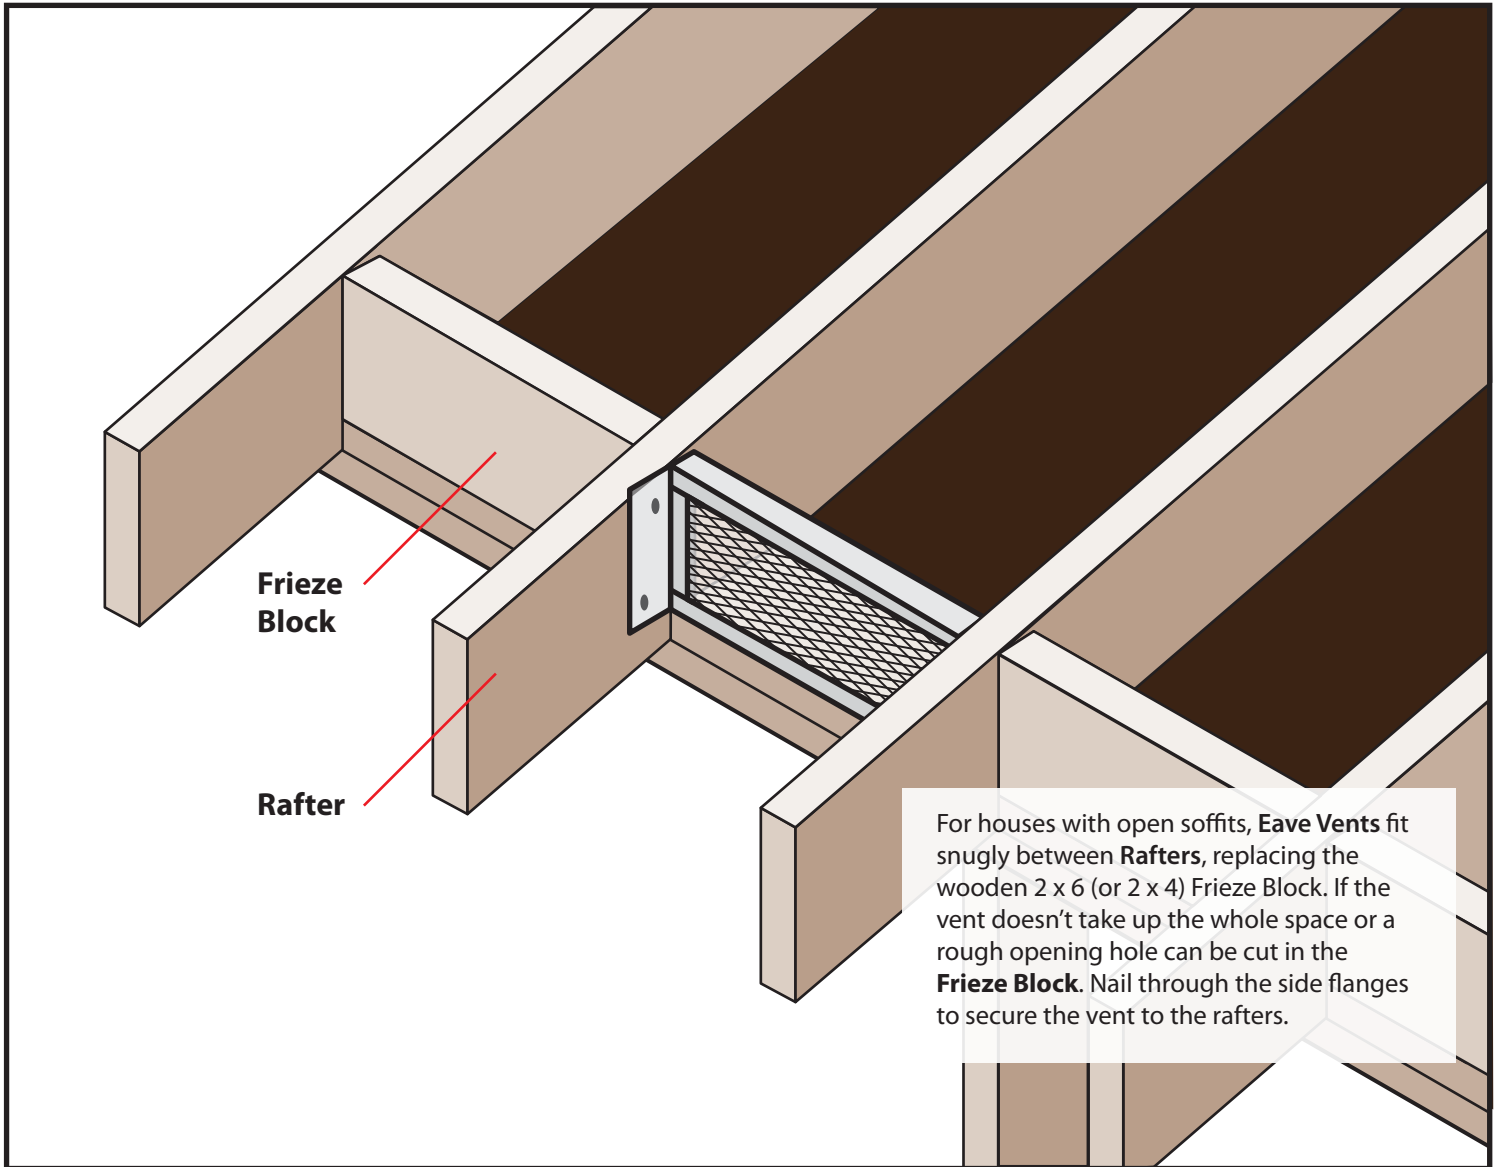

| Size                                                    | N.F.V.     | Part #    | Rough Opening         | Gross Size           |
|---------------------------------------------------------|------------|-----------|-----------------------|----------------------|
| 14 in. x 5 in. - 1/8 mesh - Stucco Flange - Galvanized  | 44 sq. in. | EV145-1/8 | 14.75 in. x 4.75 in.  | 14.5 in. x 4.5 in.   |
| 22 in. x 3 in. - 1/8 mesh - Stucco Flange - Galvanized  | 39 sq. in. | EV223-1/8 | 22.625 in. x 3.75 in. | 22.375 in. x 3.5 in. |
| 14 in. x 6 in. - 1/8 mesh - Regular Flange - Galvanized | 44 sq. in. | EV614-1/8 | 14.75 in. x 5.75 in.  | 14.5 in. x 5.5 in.   |
| 22 in. x 6 in. - 1/8 mesh - Regular Flange - Galvanized | 71 sq. in. | EV622-1/8 | 22.75 in. x 5.75 in.  | 22.5 in. x 5.5 in.   |

Eave Vents have very sharp edges. Use gloves to prevent injury. This product is not recommended for direct contact with treated lumber.

Working above grade is inherently dangerous, be sure that proper fall protection measures are in place. When working with power tools and sheet metal, gloves and eye protection are absolutely required.

These basic installation guidelines are for use with typical or standard applications. It is always recommended to seek advice from a licensed professional, and to check with your local building inspector or building permit office for approvals and possible variations that may apply.