

ASSEMBLING & INSTALLATION INSTRUCTIONS PRODUCT# 6301 FOR WALL MOUNT LIGHT FIXTURE

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER .

MOUNTING THE FIXTURE

Installation (see fig.1)

1. Disconnect power at main electrical panel before installation.
2. Thread the two mounting screws about 1/4" into the pre-drilled holes in the mounting plate, spaced about the same distance apart as the holes in the fixture back plate. Attach the mounting plate to the junction box using two junction box screws. The side of the mounting plate marked "GND" must face out.
3. Guide fixture wires through hole in center of mounting plate.
4. Follow wiring instructions carefully (see fig.2)
5. Place the fixture body(E) over the mounting plate so that the mounting plate studs protrude through the cover plate holes and screw cap nuts (F) onto the mounting screws.
6. Place the socket sleeve (B) over the socket(C) of the fixture body(E), then place the shade(A) onto the socket sleeve.
7. Attach the crystal(D) to the small hole of the socket cover.
8. Attach the crystal(G) to the small ring of the arm.
9. Install the light bulbs in accordance with the fixture's specifications. **DO NOT EXCEED THE MAXIMUM WATTAGE RATING!**

Wiring (see fig.2)

1. Connect the electrical wires as follows. Connect the Black wire from the fixture to the black house (hot) Wire. Connect the white wire from the fixture to the white (neutral) house wire. Make sure all wire nuts are secured. You may wrap the connections with electrical tape. If your outlet box has a ground wire (green or bare copper) connect fixture's ground wire to it. Otherwise attach the bare copper fixture wire to the green ground screw on the mounting plate.
2. Tuck the wire connections neatly into the wall junction box.

Fig.1

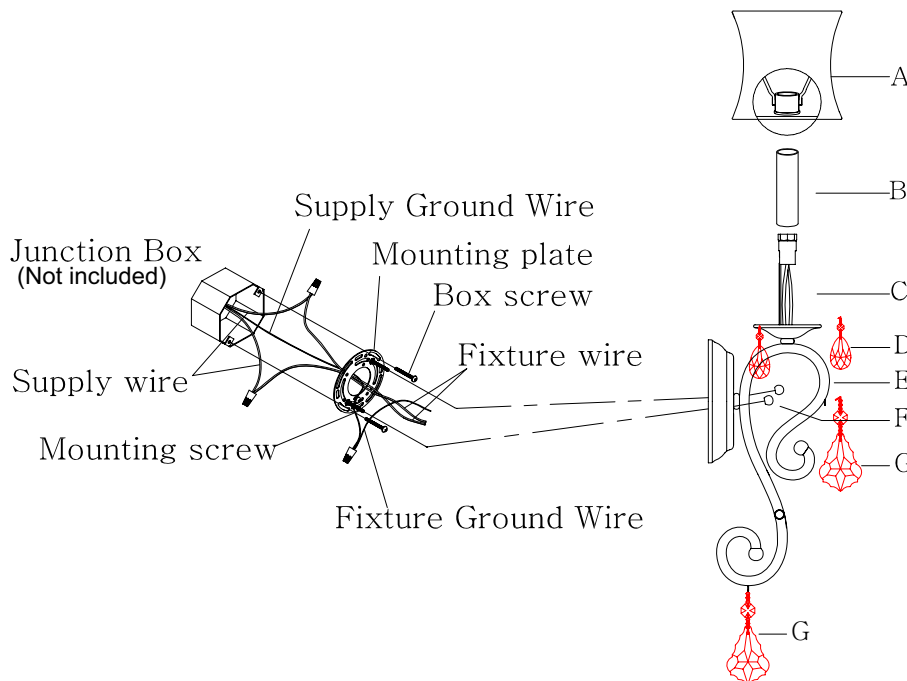


Fig.2

FIGURE WIRE 	FIGURE WIRE 	FIGURE WIRE
HOUSE WIRE Black (Hot)	HOUSE WIRE White (Neutral)	HOUSE WIRE Green or Bare Copper (Ground)

LIVEX
LIGHTING
EST. 1993

DOC20141206301