


EIGHTYFOUR™

LP6827** 84" Ceiling Fan

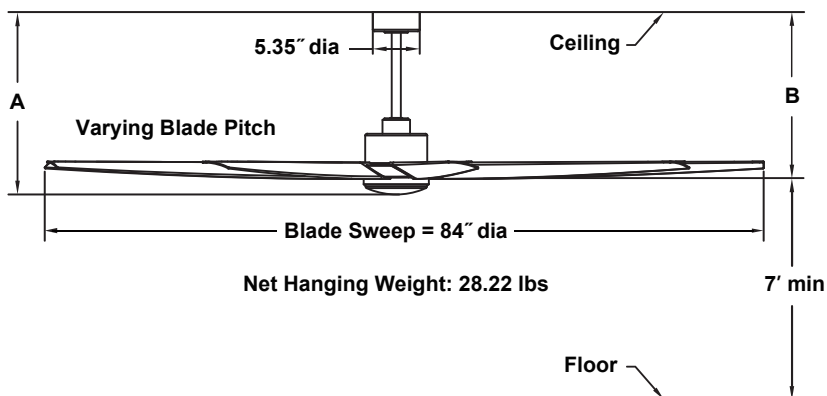

	A	B
Fan w/12" downrod	20.80"	18.95"
Fan w/18" downrod	26.80"	24.95"
Fan w/24" downrod	32.80"	30.95"
Fan w/36" downrod	44.80"	42.95"
Fan w/48" downrod	56.80"	54.95"
Fan w/60" downrod	68.80"	66.95"
Fan w/72" downrod	80.80"	78.95"

INSTALLATION REQUIREMENTS:

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 35 lbs.

ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

MOTOR SPECS:

DC135L DC motor is designed for optimal performance with this fan.

BLADE SET:

A set of nine 38" composite blades is included.

CONTROL OPTIONS:

TR305S hand-held remote control is included. Push button remote control with 16 fan speeds, fresh air, reverse, ON/OFF dimmer light levels, CCT Select (correlated color temperature selection), fan/light timer, home away, safe exit and off button. Optional TW306 wall control is available — sold separately. Instructions is provided with each control.

LIGHTING OPTIONS:

One 24-watt CCT LED (3000K/4000K/5000K) included.

DOWNROD OPTIONS:

Fan comes with a 1" dia. x 12" long downrod (DRT1-12).

Optional downrods are available in 18", 24", 36", 48", 60" and 72".

Fan can be mounted on a sloped ceiling up to 19°. Most sloped ceiling installations require a standard 24" downrod or longer downrod. Optional sloped ceiling kits (SCK1-52) are available for up to 42°. Optional close-to-ceiling kit is available as well — sold separately. Call technical support for more information.

LOCATION USE:

Fan is rated for dry and damp locations. This fan is for room over 400 sq ft.

Available Finishes

LBL	Black with Black Blades and Opal Frosted Glass
LMW	Matte White with Matte White Blades and Opal Frosted Glass

Airflow / Energy Efficiency Info (120V)

Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High (16 th)	68	11975	350	0.47	34
Med (9 th)	51	8757	767	0.18	11
Low (1 th)	30	5617	1397	0.08	4

Energy Guide FTC

Power (W _{ave})	Total Air Delivery (CFM _{ave})	Estimated Yearly Energy Cost (\$)	Ceiling Fan Efficiency (CFM/W)
22	8995	6	408

Light Bulb Information (120V)

Bulb Type	Watts	QTY	Lumens Amount	Color Temp	CRI
LED	24	1	2000	3000/4000/5000	90%