



Z5708-U

TAG _____

“Nano Pint®” 1/8 gpf, EcoVantage®, Ultra Low Consumption Urinal



Z5708-U

- Zurn One ultra low consumption urinal designed for optimal performance between Zurn fixture and Zurn flush valve to save water while exceeding industry performance standards.
- 1/8 gallons per flush [0.5 Liters per flush]
- Vitreous china
- Designed to retrofit 4 bolt pattern urinals with no work behind the finished wall required in most installations
- High efficiency washout flushing action
- Over 88% water savings over standard 1.0 gpf [4.0 Lpf] system
- Pressure compensating internal flow regulator
- 3/4" top spud
- 2" I.P.S. outlet flange and rubber gasket with integral trap
- 14" extended rim for handicap compliance when installed at proper height
- Assembled with vandal resistant outlet strainer
- Shipping weight: 24lbs.

ENGINEERING SPECIFICATION:

☐ **Z5708-U EcoVantage® Urinal-** Vitreous china urinal is supplied with retrofit bracket, 3/4" top spud, 2" outlet connection, and vandal resistant outlet strainer.



Z5708-U SERIES



This product should be used with a WaterSense labeled counterpart with a compatible flush volume to ensure that the entire system meets the requirements for

These dimensions and specifications are subject to change without notice.

Fixture dimensions meet ANSI/ASME standards A112.19.2 and CAN/CSA B45 requirements.

Meets the American Disabilities Guidelines and ANSI A117.1 requirements when urinal is installed 17" [432 mm] from finished floor.



This space is for Architectural/engineering Approval

ZURN INDUSTRIES, LLC. ♦ COMMERCIAL BRASS OPERATION ♦ 5900 ELWIN BUCHANAN DRIVE ♦ SANFORD NC 27330

Phone: 1-800-997-3876 ♦ Fax: 919-775-3541 ♦ World Wide Web: www.zurn.com

In Canada: ZURN INDUSTRIES LIMITED ♦ 7900 Goreway Drive Unit 10 ♦ Brampton, Ontario L6T5W6 ♦ Phone: 905-405-8272 Fax: 905-405-1292




Z5708-U

“Nano Pint®” 1/8 gpf, EcoVantage®,
Ultra Low Consumption Urinal

TAG _____

Rough-in dimensions for Z5708-U Series

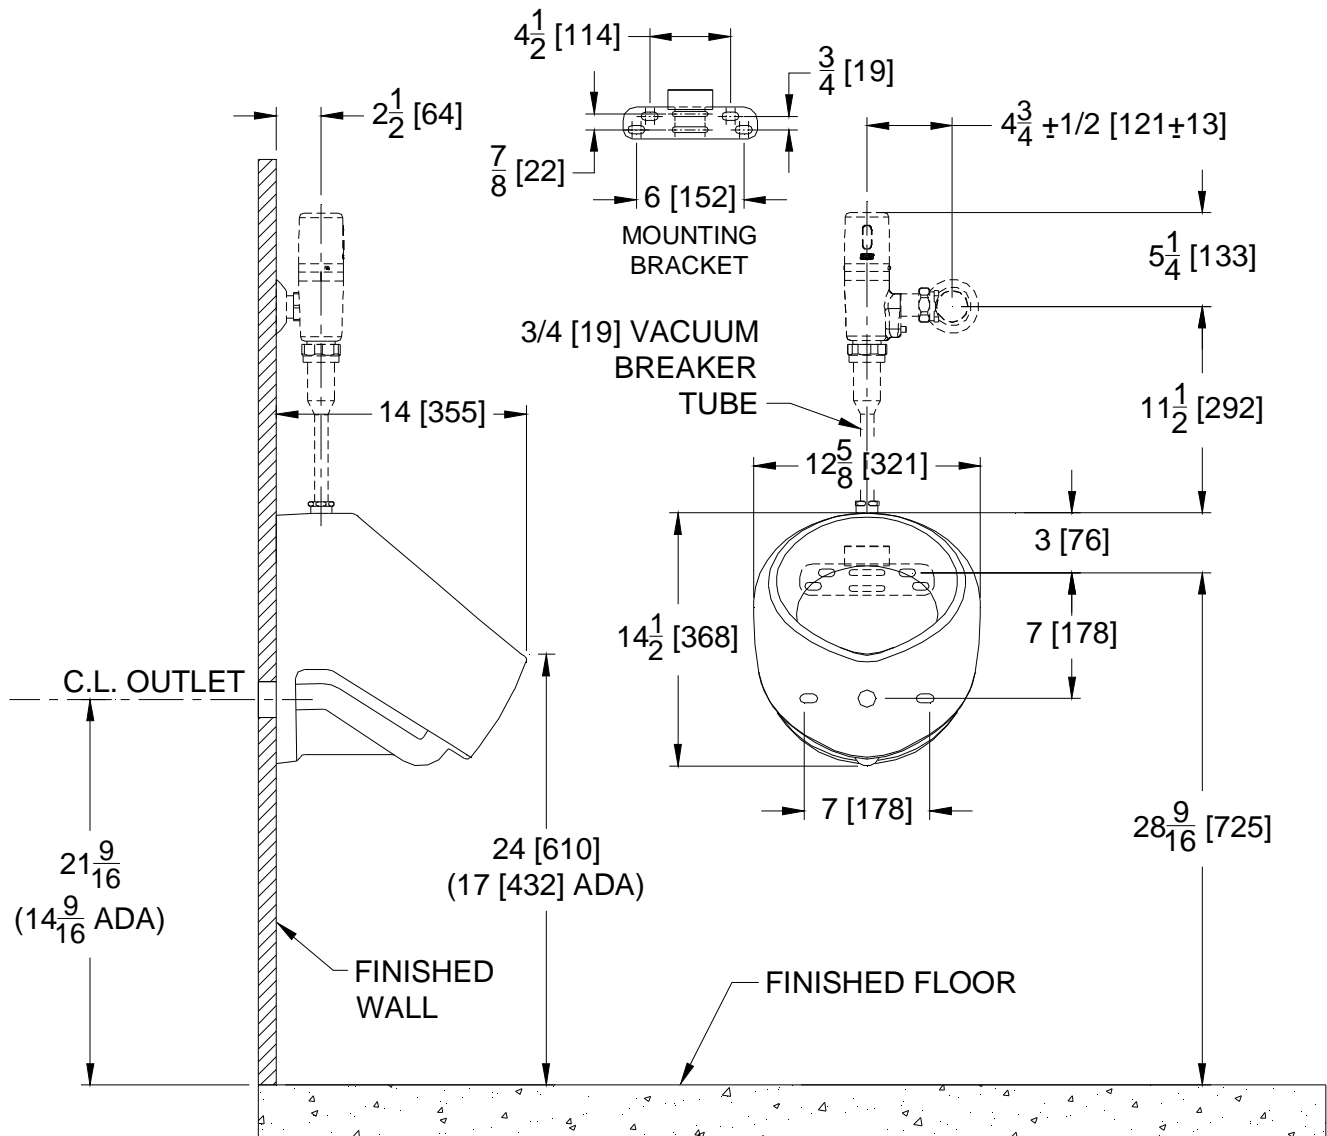

These dimensions and specifications are subject to change without notice.

Fixture dimensions meet ANSI/ASME standard A112.19.2 and CAN/CSA B45 requirements.

Meets the American Disabilities Guidelines and ANSI A117.1 requirements when urinal is installed 432mm (17") from finished floor.



Note: Rough-in for concealed plate carrier, see Zurn Z1221 Rough-in sheet.

ZURN INDUSTRIES, LLC. ♦ COMMERCIAL BRASS OPERATION ♦ 5900 ELWIN BUCHANAN DRIVE ♦ SANFORD NC 27330

Phone: 1-800-997-3876 ♦ Fax: 919-775-3541 ♦ World Wide Web: www.zurn.com

In Canada: ZURN INDUSTRIES LIMITED ♦ 7900 Goreway Drive Unit 10 ♦ Brampton, Ontario L6T5W6 ♦ Phone: 905-405-8272 Fax: 905-405-1292

EcoVantage® is registered trademarks of Zurn Industries, LLC.

The Pint® is registered trademarks of Zurn Industries, LLC.

Rev. A

Dwg. No. 312076

Date: 4/18/2017

Product No. Z5708-U