

Buy it for looks. Buy it for life.®

There is more than 1 version of this model. Page down to identify the version you have.

- High arc spout provides height and reach to fill or clean large pots while the pulldown wand provides the maneuverability for cleaning or rinsing
- Reflex® system offers smooth operation, easy movement, self retraction, and secure docking
- Metal construction with various finishes identified by suffix
- Duralock™ quick connect installation
- Pulldown spray with 68" braided hose
- Flexible supply lines with 3/8" compression fittings connect directly to supply stop
- 360° rotating spout

OPERATION

- Single handle lever
- Operates with less than 5 lbs. of force
- Operates in stream or spray mode in the pulldown or retracted position
- When filling a vessel outside the sink, the pause feature conveniently stops the flow of water as the wand passes over the counter top

FLOW

- Flow is limited to 1.5 gpm (5.7 L/min) at 60 psi
- Operates in eco-performance mode by default in aerated and spray stream

- 1255™ Duralast™ cartridge for Single-Handle Faucets
- Engineered polymers, non-ferrous and stainless steel materials

STANDARDS

- Third party certified to IAPMO Green ASME A112.18.1/CSA B-125.1 and all applicable requirements referenced therein including NSF 61 & 372
- Meets CalGreen and Georgia SB370 requirements
- Contains no more than 0.25% weighted average lead content
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- The backflow protection system in the device consists of two independently operating check valves, a primary and a secondary which prevent backflow
- ADA for lever handle

Specifications



Anabelle™ **Single-Handle High Arc Pulldown Kitchen Faucet**

Model: CA87003 series

NOTE: THIS FAUCET IS DESIGNED TO BE INSTALLED THRU 1, 2, 3, AND 4 HOLE, 1-1/2" (38mm) MIN. DIA. (1 HOLE FOR SOAP DISPENSER)

WARRANTY

Rev. 9/15

Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser 7-7/8" (200mm) 5 year warranty if used in commercial installations 3-1/2" (89mm) 15-3/4" (402mm) (50mm) 8-11/16" (221mm) 6-7/16 (164mm) 10-1/4" (260mm) 2-3/8 2-1/2" (63mm) max deck thickness 9-7/8" (250mm) 22" (558mm) **CRITICAL DIMENSIONS**

(DO NOT SCALE)

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN

www.moen.com



Specifications



- · Metal construction with various finishes identified by suffix
- · Quick connect installation
- Pullout spray with 68" braided hose
- Flexible supply lines with 3/8" compression fittings connect directly to supply stop
- 360° rotating spout

OPERATION

- · Single handle lever
- Operates with less than 5 lbs. of force
- Operates in stream or spray mode in the pullout or retracted position
- When filling a vessel outside the sink, the pause feature conveniently stops the flow of water as the wand passes over the counter top

FLOW

· Flow is limited to 1.5 gpm (5.7 L/min) at 60 psi

CARTRIDGE

1255™ Duralast™ cartridge for Single-Handle Faucets

STANDARDS

- Third party certified to IAPMO Green ASME A112.18.1/CSA B-125.1 and all applicable requirements referenced therein including NSF 61/9 & 372
- Meets CalGreen and Georgia SB370 requirements
- Contains no more than 0.25% weighted average lead content
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- The backflow protection system in the device consists of two independently operating check valves, a primary and a secondary which prevent backflow



WARRANTY


 Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser



Anabelle™ Single-Handle High Arc Pulldown Kitchen Faucet

Model: CA87003 series

NOTE: THIS FAUCET IS DESIGNED TO BE INSTALLED THRU 1, 2, 3, AND 4 HOLE, 1-1/2" (38mm) MIN. DIA. (1 HOLE FOR SOAP DISPENSER)

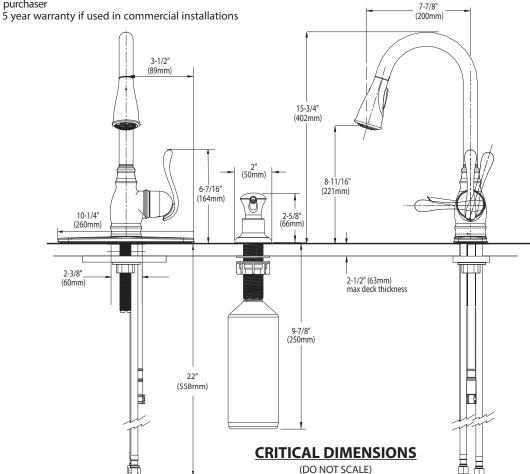

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN www.moen.com



Buy it for looks. Buy it for life.®

DESCRIPTION

- · Metal construction with various finishes identified by suffix
- · Quick connect installation
- Pullout spray with 68" braided hose
- Flexible supply lines with 3/8" compression fittings connect directly to supply stop
- 360° rotating spout

OPERATION

- · Single handle lever
- · Operates with less than 5 lbs. of force
- Operates in stream or spray mode in the pullout or retracted position
- When filling a vessel outside the sink, the pause feature conveniently stops the flow of water as the wand passes over the counter top

FLOW

Flow is limited to 1.5 gpm (5.7 L/min) at 60 psi

CARTRIDGE

1255™ Duralast™ cartridge for Single-Handle Faucets


STANDARDS

- Third party certified to IAPMO Green ASME A112.18.1/CSA B-125.1 and all applicable requirements referenced therein including NSF 61/9 & 372
- Meets CalGreen and Georgia SB370 requirements
- Contains no more than 0.25% weighted average lead content
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- The backflow protection system in the device consists of two independently operating check valves, a primary and a secondary which prevent backflow
- ADA 👍 for lever handle

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations


Specifications



Anabelle™ Single-Handle High Arc Pulldown Kitchen Faucet

Model: CA87003 series

NOTE: THIS FAUCET IS DESIGNED TO BE INSTALLED THRU 1, 2, 3, AND 4 HOLE, 1-1/2" (38mm) MIN. DIA. (1 HOLE FOR SOAP DISPENSER)

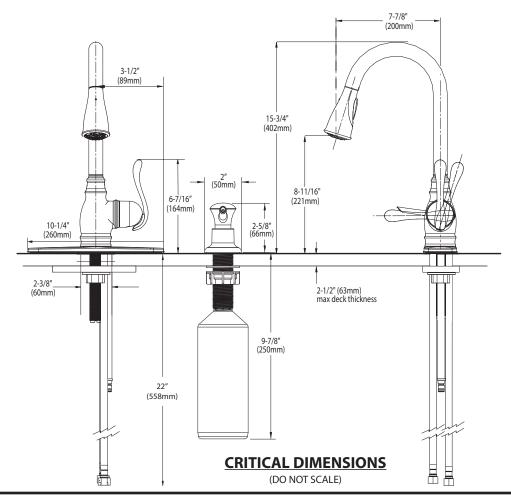

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN www.moen.com