

LED Vaportite
VT3-20



Low Cost Solution for Rigorous Locations

Patent Pending



VT3-20

LED Vaportite

Vapors, Gas, ...

The VT3 LED Linear Vaportite is designed to give long lasting, energy efficient light in demanding locations. This IP65 rated fixture is dust and water tight and replaces legacy fluorescent strip lights in car wash operations, garages, maintenance facilities, canopies, locker rooms, and stairwells.

Captive Latches

Ten stainless steel latches ensure a water tight seal.

Toolless Surface Mount


Easy toolless installation with spring steel clips

Mounting Hook

Spring clips contain a mounting hook for cable suspension

Wrapped Lens

Provides 5% uplight, frosted polycarbonate diffuser

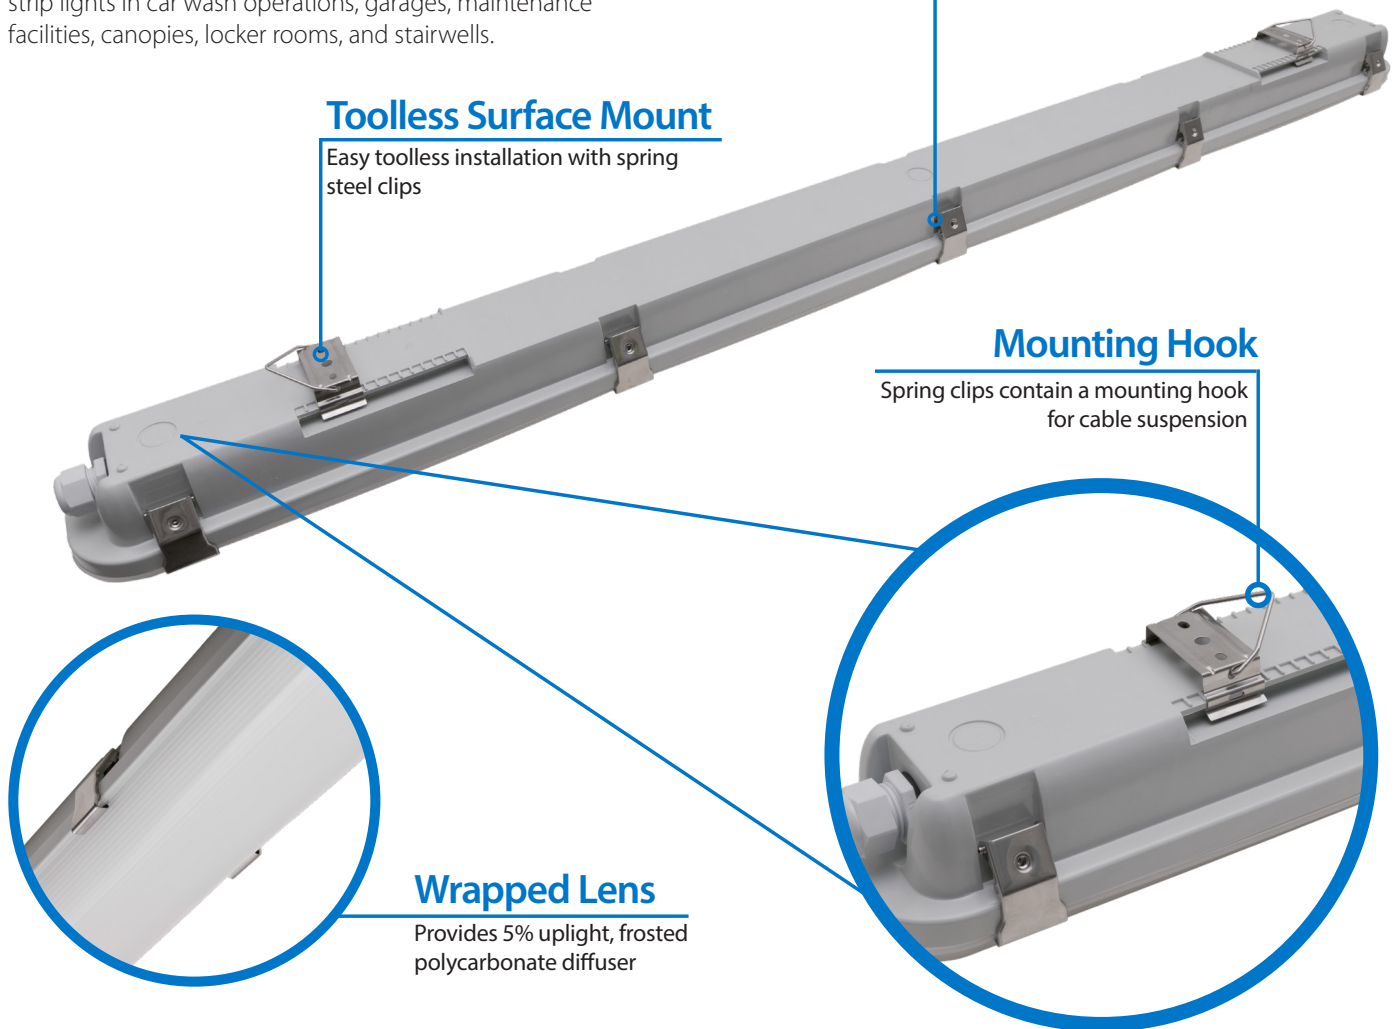

VT3-20

Ordering Information

Construction

- Fully gasketed polycarbonate housing
- Ten captive stainless steel latches ensure a water tight seal
- Eight drill through knockouts available (6 on back, 1 on each end)

Optical System

- UV stabilized, frosted polycarbonate diffuser
- Wrapped lens provides >5% uplight
- 80+CRI

Electrical

- High efficacy using latest generation mid-power LED's
- Universal input 120-277VAC
- Dimmable to 10% via 0-10VDC dimming
- TM-21 Projected L70(9k) life >100,000 hours
- LM-79, LM-80 testing performed in accordance with IESNA standards

Finish



- Light grey, gloss polycarbonate body with frosted lens

Installation

- Toolless surface mount installation via spring steel clips
- Clips contain mounting hook for cable suspension
- Can be surface mounted to walls and ceilings for application variability
- Operating temperature rating of -40°F to 122°F (-40°C to 50°C)
- For installations where power surge may be possible, NICOR recommends installing additional surge protection at the electrical distribution panel

Warranty

- 5-year limited system warranty standard
- Warranty does not cover product failure due to an overvoltage event (power surge)

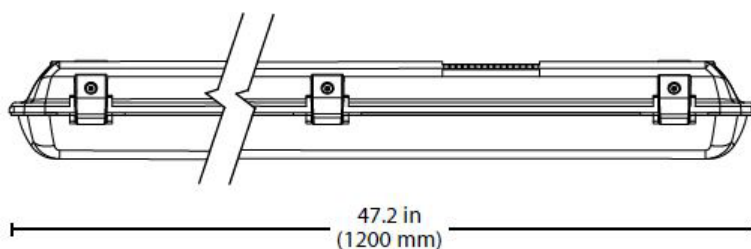

Performance Data			
Model Number	Lumens	Watts	Lumens/Watt
VT3204SUNV40	4952	38.1	130.0
VT3204SUNV50	4992	38.1	131.0
VT3204HUNV40	6724	51.8	129.8
VT3204HUNV50	6778	51.8	130.8

Ordering Information					
Example: VT310UNV40					
Series	Version	Length	Output	Voltage	CCT
VT3	20 (Version 2)	4 (Feet)	S (Standard)	UNV (120-277 V)	40 (4000 K)
			HO (High Output)		50 (5000 K)

Warehouse Locations

Albuquerque, NM

Atlanta, GA

Clifton, NJ

Detroit, MI

Houston, TX

Indianapolis, IN

Miami, FL

Syracuse, NY

Van Nuys, CA

T 800.821.6283

F 800.892.8393

www.nicorlighting.com

2200 Midtown Pl. NE

Albuquerque, NM 87107 USA



LIT-VT3-20

©2019 NICOR® • ALL RIGHTS RESERVED



NICOR®