



\*Matte Black finish Shown

**AQUA-Q FOLD**

### Specification Features

- SHOWER SCREEN, SHOWER BASE, AND WALL KIT
- 1/4 IN. (6MM) THICK CERTIFIED CLEAR TEMPERED GLASS
- UP TO 3/8 IN. ADJUSTMENT FOR OUT-OF-PLUMB
- REVERSIBLE FOR RIGHT OR LEFT DOOR INSTALLATION
- SLIMLINE SHOWER BASE: LOW PROFILE THRESHOLD DESIGN
- SLIP-RESISTANT TEXTURED FLOOR PATTERN
- GLOSSY ACRYLIC FINISH IS SCRATCH AND STAIN RESISTANT
- WALLS ARE MADE WITH ACRYLIC/ABS MATERIAL
- PANELS CAN BE TRIMMED TO SIZE

### Technical Information

- Model: Aqua-Q Fold
- Door Type: Bi-Fold Door
- Kit Dimensions: 32" D x 32" W x 78 3/4" H
- Product Width: 32"
- Product Depth: 32"
- Glass Thickness: 1/4 in. (6mm)
- Glass Type: Clear
- Base Color: Biscuit
- Backwalls Color: Biscuit

### Codes/Standards Applicable


- ANSI Z97.1 (Tempered Glass)
- 16 CFR Part 1201
- cUPC Certified Base

### Hardware Finish Options:



- 01 - Chrome Finish
- 04 - Brushed Nickel
- 06 - Oil Rubbed Bronze
- 09 - Matte Black

### Model SKU#:

- DL-6527QC-22-01 Biscuit Acrylic Kit
- DL-6527QC-22-04 Biscuit Acrylic Kit
- DL-6527QC-22-06 Biscuit Acrylic Kit
- DL-6527QC-22-09 Biscuit Acrylic Kit

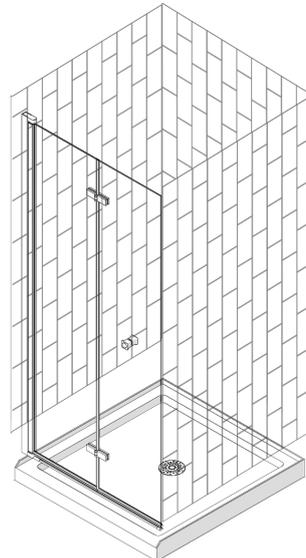

## Available Product Configurations:




### Tub Door SKU#s:

SD-363658Q-01  
SD-363658Q-04  
SD-363658Q-06  
SD-363658Q-09

### Shower Door SKU#s:

SD-363072Q-01 SD-363472Q-01  
SD-363072Q-04 SD-363472Q-04  
SD-363072Q-06 SD-363472Q-06  
SD-363072Q-09 SD-363472Q-09

### 32" D x 32" W Shower Door + Base + Backwalls Kit



#### Model #s:

DL-6527QC-88-01 Black Acrylic Kit  
DL-6527QC-88-04 Black Acrylic Kit  
DL-6527QC-88-06 Black Acrylic Kit  
DL-6527QC-88-09 Black Acrylic Kit

DL-6527QC-01 White Acrylic Kit  
DL-6527QC-04 White Acrylic Kit  
DL-6527QC-06 White Acrylic Kit  
DL-6527QC-09 White Acrylic Kit

## Important Notes:

If this unit is going to be installed in a new construction, please, install all of the required plumbing and drainage before installing the shower. Use a competent and licensed plumber for all plumbing installation period.

Install this product according to the installation manual.

Aluminum wall profile accommodates up to 3/8 in. adjustment for out-of-plumb (uneven walls).

Drain opening fits any standard 2 in. compression fitted drain (drain not included).

Professional installation recommended; Drilling into the threshold is required for installation of this product.

## Important Disclaimers:

- Prior to installation, please ensure that the installation surface is finished, level and solid and will be able to support the total weight of the unit. Also, make sure that the walls are plumb. Irregular installation, surface level or out of square conditions can result in serious problems for your installation.
- Please read Installation Manual thoroughly prior to installing this product.
- Please note that you should consult your local building codes with questions on installation compliance standards. Building and plumbing codes may vary by location, and DreamLine® is not responsible for code compliance standards for your project and will not accept any returns.

For commercial customers, we strongly recommend the use of Dreamline's Onsite Contractor Support option.

Dreamline's commercial warranty does not apply to damage or losses resulting from (i) other than normal and proper use and normal service conditions; (ii) improper installation, (iii) installation in or upon an unsuitable surface or areas; (iv) abuse, (v) accident, (vi) alteration, (vii) misuse, (viii) neglect, (ix) unauthorized repair or the failure to utilize suitably qualified and trained persons to perform service and/or repair of the Product, (x) improper maintenance, (xi) failure to follow installation, operating, cleaning or maintenance instructions, and (xii) use of "non-authorized" parts.