

EMPV-30EC82H

PRODUCT

size

Item Size (inches)


30" x 21" x 3 11/25"




FEATURES & BENEFITS

01. Built-in type, saves your countertop space.
02. Responsive glide touch to operate, very easy to use.
03. The child lock feature prevents children from operating.
04. Ceramic panel material which is the easiest material to clean.
05. Residual temperature reminder function to prevent skin burns.
06. Three quick setting functions include melting, warming, and simmering.
07. One bridge to combine two temperature zones so as to provide more temperature options.
08. With good heat dissipation function supported by 2 heat dissipation vents on the left and back.
09. Auto switch off 2 hours after when there is no operation, so as to eliminate the fire accident.
10. 18 powers for 18 types of temperature settings to control your cooking temperature more accurately.

Product size

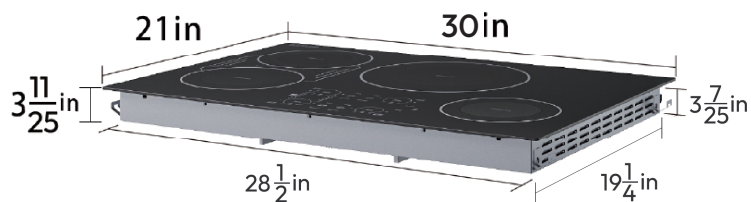

Installation size

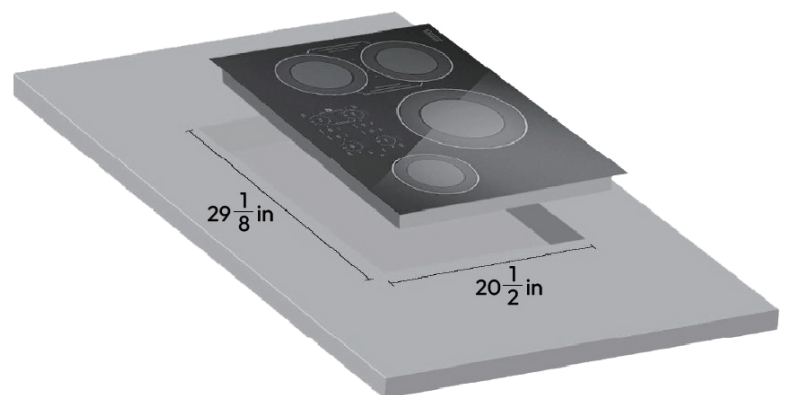

Model No.	EMPV-30EC82H	
Product Name	30inch	
Type	Built-in	
Frame	Metal	
Control mode	Slider Touch control	
Voltage/frequency	208V/240V~60Hz, 36.25A	
Total power	208V/7500W, 240V/8700W	
Power(W)	Left front: 1.85kW/2.7kW Left rear: 1.85kW/2.7kW Left bridge 3.7kW	Right front: 1.6kW/2.0kW Right rear: 3.0kW/4.0kW
Power sharing	Left 3700W	Right 5000W
Features	Automatic RapidHeat	
Function	Power/Lock/Pause/Bridge	
Preset features	Melt(113°F)/Warm(158°F)/Simmer(195°F)	
Boost up to	10 mins	
Heating area size	Left front/rear: about 7"(18cm) Right front: about 6"(16cm) Right rear: about 10" (25cm)	
Half bridge circuit Consecutive low power output	Right rear Minimum 500W	
Consecutive low power cooking burner	Left front: 500W Left Rear: 500W	Right front: 400W

intermitent heating in short time at low power level bring great cooking experience,
consecutive low output power can avoid water spilling over

Bridge for larger cookware or griddles	Yes, one bridge
Power stage setting	17 + Power Boost
Coils	Copper coil
Timer(min)	9H59M
Auto switch off safety	Yes
Child lock	Yes
Residual heat indicator	Yes
Product Size(mm) (L*W*H)	30" x 21" x 3 11/25"
Built-in Size(mm) (L*W*H)	Min: 29" x 19 7/8" Max: 29 1/8" x 20 1/2"
Package standard	ISTA-3A/6A
Cable length(M)	1.0
Certificate standard	cTUVus/FCC
Carton	Brown box