


Deluxe Fan-Light Combination with Round Polymeric Grille MODEL: 8664RP

DESCRIPTION

- White polymeric grille impervious to bathroom climate.
- Powerful Deluxe Fan-Light Combination units quietly remove stale, steamy air from bathrooms up to 95 sq. ft., other rooms up to 125 sq. ft.
- Glass lens brightly diffuses 100 watt bulb (purchase bulb locally). Lens extends only 1½" from finished ceiling.
- Polypropylene blower wheel performs efficiently with a minimum of sound.
- Tapered duct adapter with built-in damper for easy installation to 4" duct.
- May be wired for simultaneous or separate fan light operation.
- This model is UL listed for use in a tub/shower stall enclosure when used with GFI branch circuit wiring.
- Refer to NuTone's catalog for a complete line of accessories to effectively adapt these units to your construction requirements.
- Type IC for use with thermal insulation.

DESIGN FEATURES

Air Delivery:	100 CFM.
Sound Level:	3.5 Sones.
Dimensions:	Housing: 9" x 9" x 6" deep. Grille: 15" diameter x 1½" deep. Reflector: 9¾" diameter. Lens: 9¾" diameter. Cutout: 13¼" diameter.
Material & Finish:	Housing: .020" Galvanized steel. Grille: Polymeric, white finish. Reflector: Steel, white powder coat finish. Lens: Frosted Glass.
Motor:	Plug-in, Thermally protected.
Blower Wheel:	Centrifugal, polypropylene.
Duct Size:	4" diameter.
Electrical Rating:	120v, 60Hz, 1.9A.

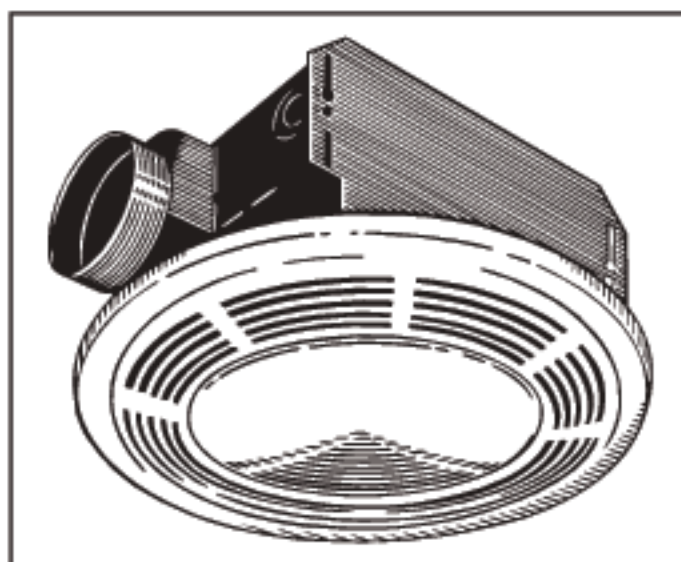

INSTALLATION

- Complete installation instructions are included with each unit.

ARCHITECT'S SPECIFICATIONS

Fan-Light Combination shall be Model Number 8664P as manufactured by NuTone according to listed specifications. Unit shall deliver 100 CFM at a sound level of 3.5 Sones. Housing shall measure 9" x 9" x 6" deep and connect to 4" diameter duct.