




INSTALLATION GUIDE – FRAMED PANT RACK

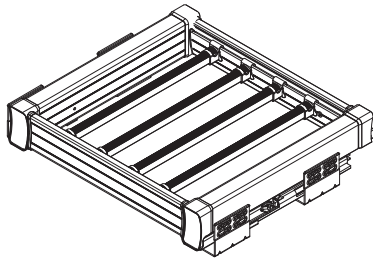


16"

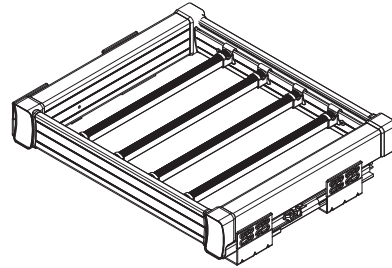

18"

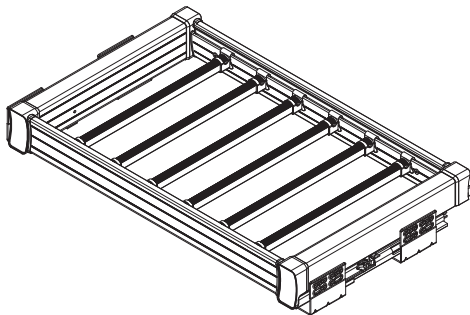


24"

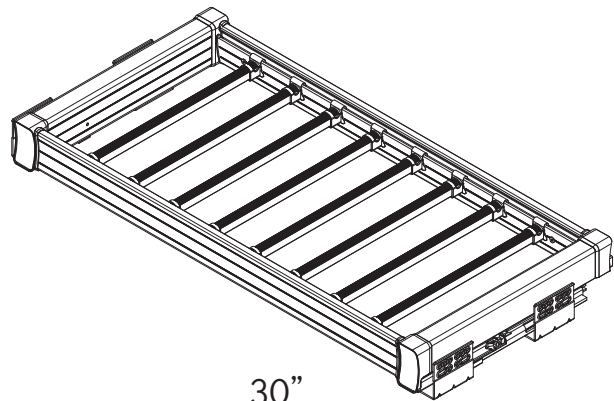


30"


Included Components




Pant rack frame
(1)



Pant hanger bar
assembly
(Quantity varies by model width)



Left and right
slides
(2)




Plastic slide covers
(with pre-installed 3M tape)
(2)




Mounting screws
(4)


Required Tools

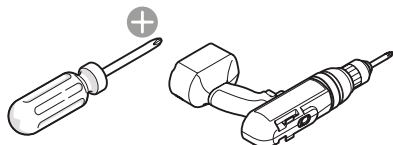

Phillips screwdriver or drill



Tape measure


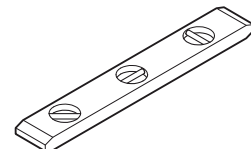


Level

Installation Steps


1 Select Position

- Choose frame location inside cabinet.
- Ensure clearance above and below.

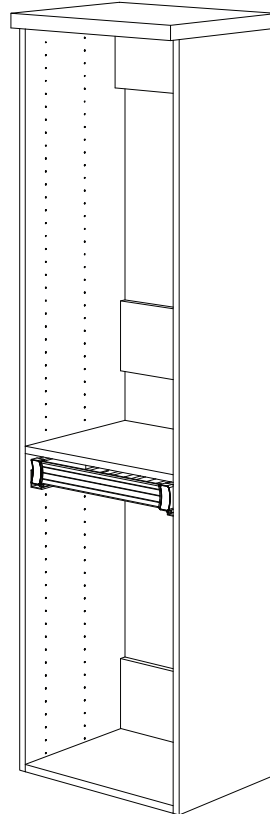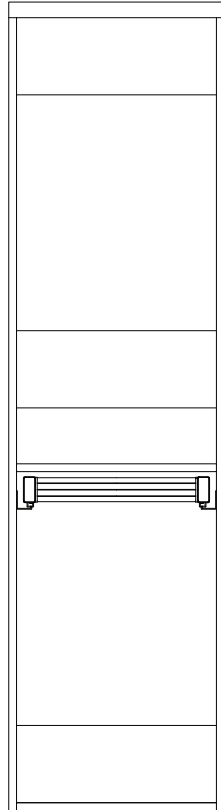


2 Align Rails

- Identify left and right slides.

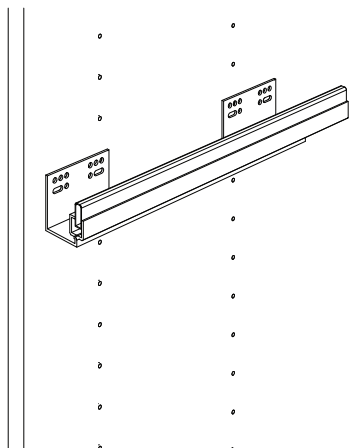

Left rail

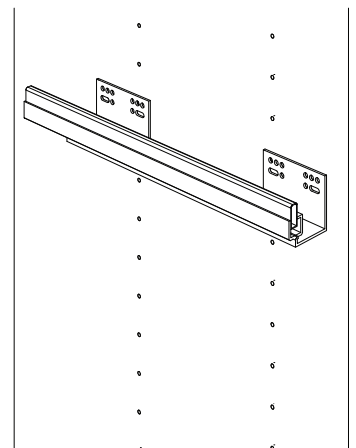


Right rail


Installation Steps

Position the front of each drawer slide 20 mm from the front edge of the cabinet.

- In cabinets with compatible pre-drilled holes, align the drawer slide with the holes and secure using the supplied 5mm screws.

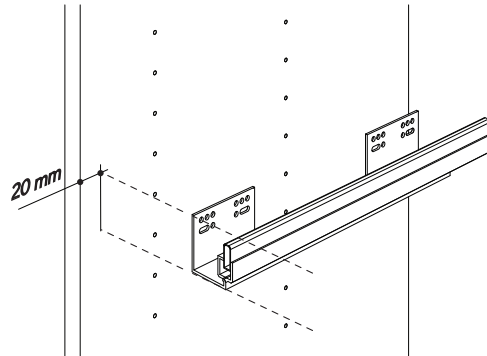


- In other cabinets:
 - Measure 20 mm from the cabinet front edge and mark the front mounting hole.
 - Use any of the 12 holes at the front of the slide as the first screw position.
 - Position the rail at this mark, ensure it is level.
 - Use the rail itself as a template to mark and drill the remaining rear mounting hole.

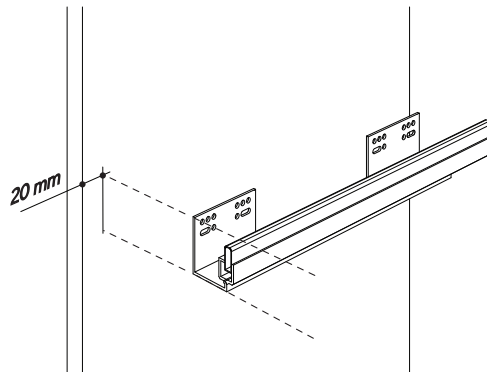

3 Fasten Rails

- Secure slides with provided screws.
- Confirm both sides are parallel and level.

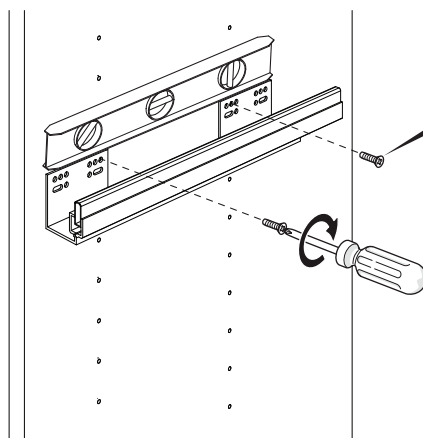


-  Euro screws for pre-drilled cabinets
-  Wood screws for generic cabinets


Installation Steps

4 Insert Pant Rack Frame

- Fully extend slides and align the frame brackets with the slide runners.

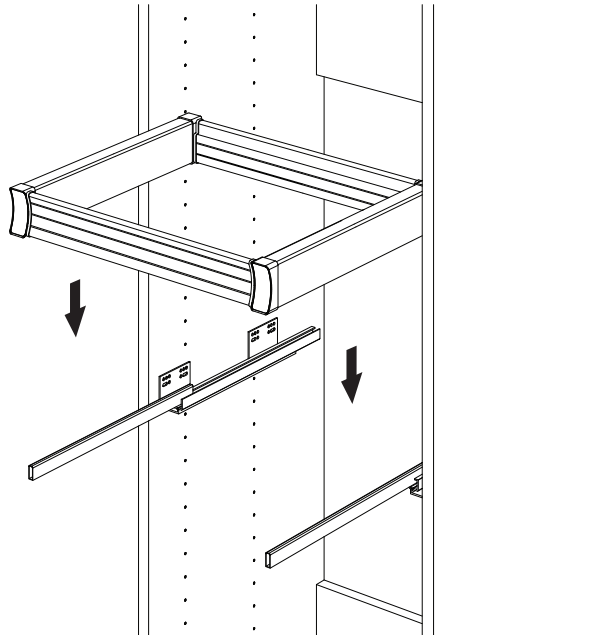


- Push inward until both sides engage and lock into place.

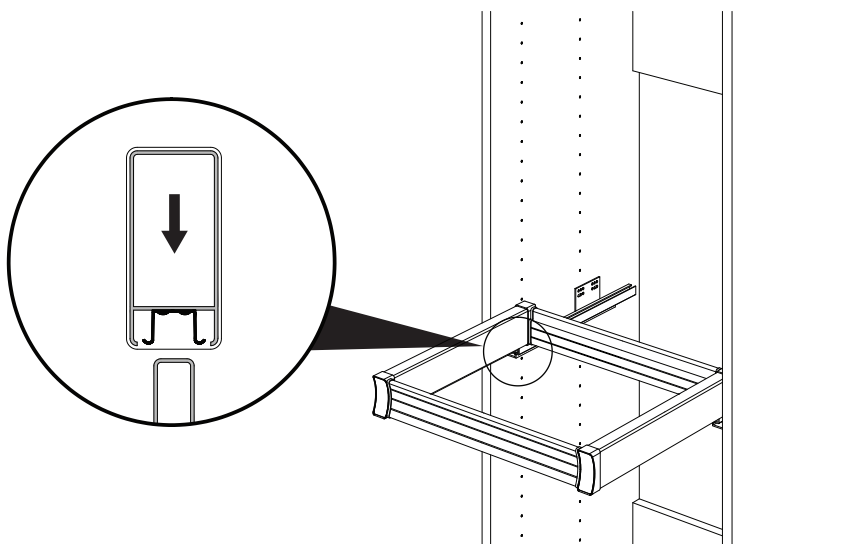

Installation Steps


5 Apply Covers

- Peel off the release liner from the pre-installed 3M tape.
- Press plastic covers onto the slides to conceal hardware.

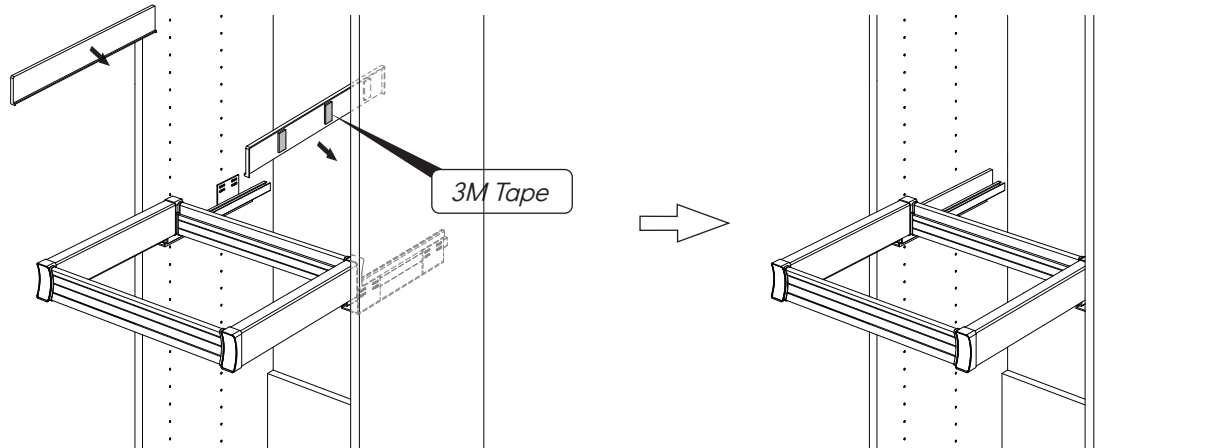

6 Install Pant Hanger Bars


- Place pant hanger bar assembly onto supports inside frame.
- Ensure both ends are seated securely.
- Distribute pant hangers evenly across bar.

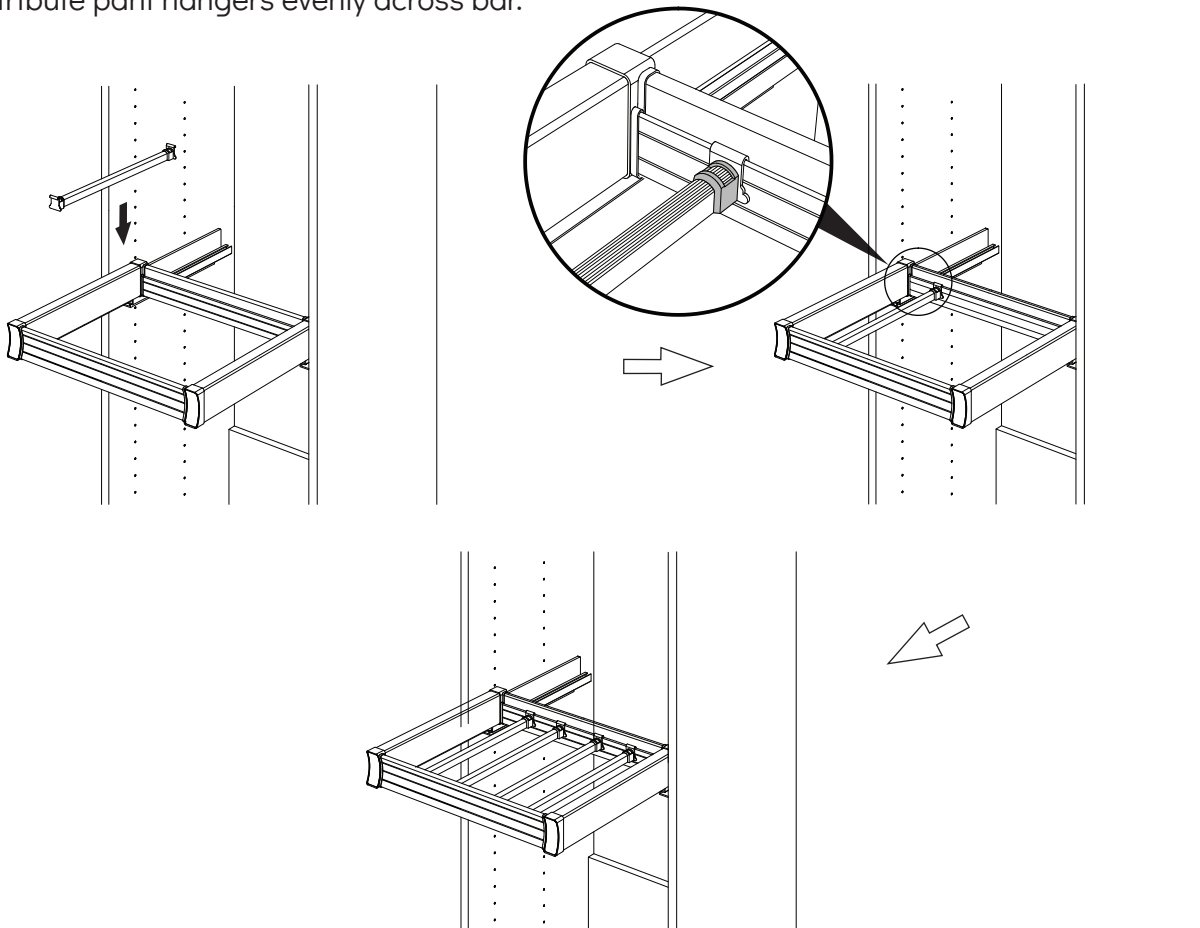


Installation Steps

7 Test Operation

- Operate the rack to confirm smooth, full extension.

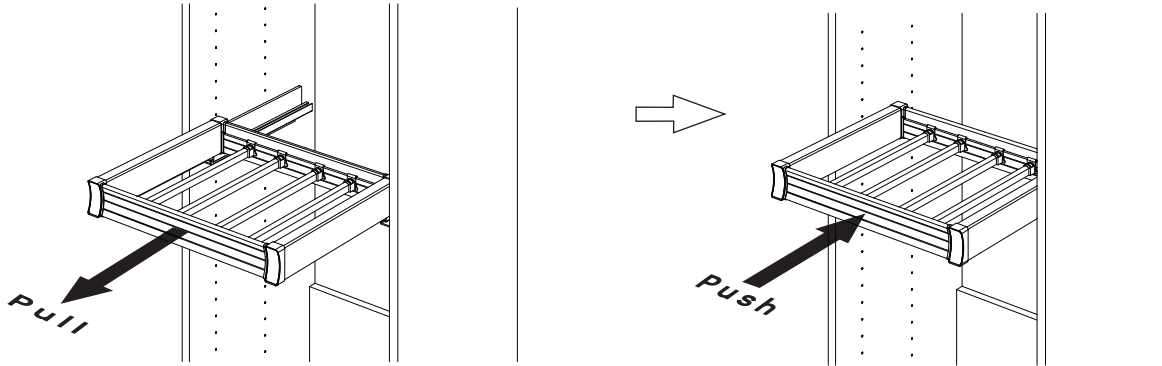

- Verify alignment and secure fit inside cabinet.

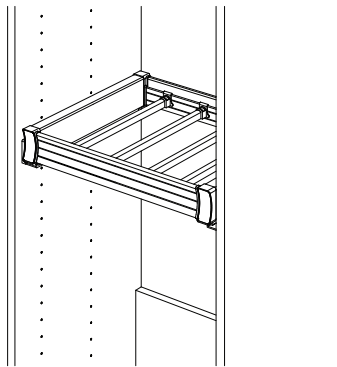

Finish



Notes:

- Do not exceed **80 lbs** capacity.
- Frame can be removed by lifting gently and pulling out.
- Re-check screws periodically.
- For non-standard cabinets: align carefully before fastening.